VIAVI

Cable Id :	**Fiber Id :** Fiber 2846
Location A : LOC A	**Location B :** LOC B
Job Id :	**Technician Id :**

SmartOTDR (S/N 28162)	E100AS (S/N 28162)	Date : 07/12/2025 10:38

Test Setup							
OTDR EXPERT	1550nm	10ns	490m	16cm	20.0s	1.46800(G652 G657)	-81.0 dB
Alarms							
Thresholds				None			
Summary							

Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms
fiber no three bhumind gp.msor	1550	3.096	48.38	0.272	LOC A -> LOC B	7	
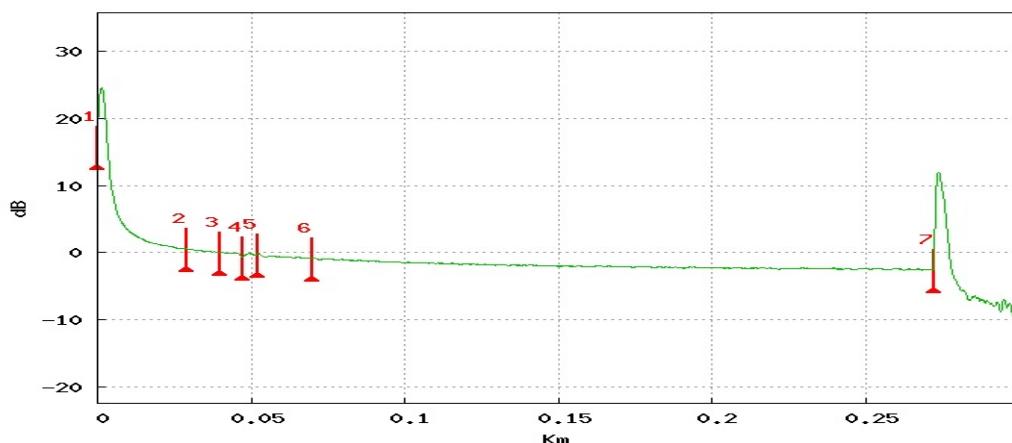
OTDR 1550nm

Event		Distance	Loss	Reflect.	Slope	Section	T. Loss
		Km	dB	dB	dB/km	Km	dB
1		0.000		>-20.59		0.000	0.000
2		0.029	0.416			0.029	0.006
3		0.040	0.434			0.011	0.423
4		0.047	0.032	-83.99		0.007	0.858
5		0.052	0.409			0.005	0.892
6		0.070	0.441			0.018	1.304
7		0.272		-40.75		0.202	3.096