

Design Title : Sam□□□□□.scene
Revision Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2026-07-05



Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.10.020020.43LP-AA2A00/330	Profile 20x20, 4H, light, plain	MM	1
2	1.10.020020.43LP-A00A00/410	Profile 20x20, 4H, light, plain **PER DRAWING 1**	MM	1
2.A	ZA1/20.0	Parallel-connector distance left: 20.0 mm, anchor on side: 4	EA	1
2.B	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 20.0 mm, Side: 2	EA	1
2.C	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 300.0 mm, Side: 4	EA	1
3	1.10.020020.43LP-A00A00/410	Profile 20x20, 4H, light, plain **PER DRAWING 2**	MM	1
3.A	ZA4/390.0	Parallel-connector distance left: 390.0 mm, anchor on side: 1	EA	1
3.B	Q11A1I00000-4.0	Counterbore, left Ø 4.0 mm, distance 110.0 mm, Side: 1	EA	1
3.C	Q11A3I00000-4.0	Counterbore, left Ø 4.0 mm, distance 390.0 mm, Side: 3	EA	1
4	1.10.020020.43LP-A00A00/575	Profile 20x20, 4H, light, plain **PER DRAWING 3**	MM	1
4.A	Q11A3I00000-4.0	Counterbore, left Ø 4.0 mm, distance 10.0 mm, Side: 3	EA	1
4.B	Q11A3I00000-4.0	Counterbore, left Ø 4.0 mm, distance 515.0 mm, Side: 3	EA	1
4.C	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 565.0 mm, Side: 4	EA	1
5	1.10.020020.43LP-A00A00/595	Profile 20x20, 4H, light, plain **PER DRAWING 4**	MM	1
5.A	Q11A3I00000-4.0	Counterbore, left Ø 4.0 mm, distance 10.0 mm, Side: 3	EA	1
6	1.10.020020.43LP-AA4A00/825	Profile 20x20, 4H, light, plain **PER DRAWING 5**	MM	1
6.A	Q11A1I00000-4.0	Counterbore, left Ø 4.0 mm, distance 35.0 mm, Side: 1	EA	1
6.B	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 659.8 mm, Side: 4	EA	1
7	1.10.020020.43LP-A00A00/1235	Profile 20x20, 4H, light, plain **PER DRAWING 6**	MM	1
7.A	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 10.0 mm, Side: 4	EA	1
7.B	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 750.0 mm, Side: 4	EA	1
8	1.10.020020.43LP-A00A00/1255	Profile 20x20, 4H, light, plain **PER DRAWING 7**	MM	1
8.A	ZA4/10.0	Parallel-connector distance left: 10.0 mm, anchor on side: 1	EA	1
9	1.10.020020.43LP-A00A00/410	Profile 20x20, 4H, light, plain **PER DRAWING 8**	MM	2
9.A	Q11A3I00000-4.0	Counterbore, left Ø 4.0 mm, distance 20.0 mm, Side: 3	EA	2

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
9.B	Q11A1I00000-4.0	Counterbore, left Ø 4.0 mm, distance 300.0 mm, Side: 1	EA	2
10	1.10.020020.43LP-A00A00/680	Profile 20x20, 4H, light, plain	MM	2
11	1.10.020040.44SP-A00AA4/940	Profile 20x40, 4H, heavy, plain	MM	2
12	1.10.020040.44SP-AA2A00/940	Profile 20x40, 4H, heavy, plain	MM	2
13	1.11.030030.43LP-AA4AA4/750	Profile 30x30, 4F, light, plain	MM	1
14	1.11.030030.43LP-A00AA4/755	Profile 30x30, 4F, light, plain	MM	1
15	1.11.030030.43LP-AA4A00/1500	Profile 30x30, 4F, light, plain **PER DRAWING 9**	MM	1
15.A	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 665.0 mm, Side: 4	EA	1
16	1.11.030030.43LP-AA4A00/1500	Profile 30x30, 4F, light, plain **PER DRAWING 10**	MM	1
16.A	Q11A3I00000-4.0	Counterbore, left Ø 4.0 mm, distance 665.0 mm, Side: 3	EA	1
16.B	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 785.0 mm, Side: 4	EA	1
17	1.11.030030.43LP-AA4A00/1500	Profile 30x30, 4F, light, plain **PER DRAWING 11**	MM	1
17.A	Q11A1I00000-4.0	Counterbore, left Ø 4.0 mm, distance 665.0 mm, Side: 1	EA	1
17.B	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 785.0 mm, Side: 4	EA	1
18	1.11.030030.43LP-A00A00/1930	Profile 30x30, 4F, light, plain **PER DRAWING 12**	MM	1
18.A	Q11A1I00000-4.0	Counterbore, left Ø 4.0 mm, distance 965.0 mm, Side: 1	EA	1
18.B	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 1590.0 mm, Side: 2	EA	1
19	1.11.030030.43LP-AA4AA4/680	Profile 30x30, 4F, light, plain	MM	2
20	1.11.030030.43LP-AA4A00/750	Profile 30x30, 4F, light, plain	MM	3
21	1.11.030030.43LP-AA4AA4/945	Profile 30x30, 4F, light, plain	MM	4
22	1.11.040040.43LP-AA4A00/675	Profile 40x40, 4E, light, plain	MM	1
23	1.11.040040.43LP-AA4AA4/745	Profile 40x40, 4E, light, plain	MM	1
24	1.11.040040.43LP-A00A00/1540	Profile 40x40, 4E, light, plain **PER DRAWING 13**	MM	1
24.A	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 20.0 mm, Side: 4	EA	1
24.B	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 375.0 mm, Side: 4	EA	1
24.C	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 735.0 mm, Side: 4	EA	1
24.D	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 1110.0 mm, Side: 4	EA	1
24.E	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 1520.0 mm, Side: 4	EA	1

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
25	1.11.040040.43LP-A00A00/1540	Profile 40x40, 4E, light, plain **PER DRAWING 14**	MM	1
25.A	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 20.0 mm, Side: 2	EA	1
25.B	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 375.0 mm, Side: 2	EA	1
25.C	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 735.0 mm, Side: 2	EA	1
25.D	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 1110.0 mm, Side: 2	EA	1
25.E	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 1520.0 mm, Side: 2	EA	1
26	1.11.040040.43LP-A00A00/1920	Profile 40x40, 4E, light, plain **PER DRAWING 15**	MM	1
26.A	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 960.0 mm, Side: 4	EA	1
27	1.11.040040.43LP-A00A00/1920	Profile 40x40, 4E, light, plain **PER DRAWING 16**	MM	1
27.A	Q11A2I00000-4.0	Counterbore, left Ø 4.0 mm, distance 960.0 mm, Side: 2	EA	1
28	1.11.040040.43LP-A00A00/1920	Profile 40x40, 4E, light, plain	MM	1
29	1.11.040040.43LP-A00AA4/1500	Profile 40x40, 4E, light, plain **PER DRAWING 17**	MM	2
29.A	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 715.0 mm, Side: 4	EA	2
30	1.11.040040.43LP-A00AA4/1500	Profile 40x40, 4E, light, plain **PER DRAWING 18**	MM	2
30.A	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 160.0 mm, Side: 4	EA	2
30.B	Q11A4I00000-4.0	Counterbore, left Ø 4.0 mm, distance 835.0 mm, Side: 4	EA	2
31	1.46.204.1720.2	Angle GD-Zn, 17x20, powder-coated	EA	26
32	1.46.21039	Angle 100x100, dia: 9.0 B30	EA	30
33	0.63.D06912.08010	Cylindric head screw, DIN 6912 - M8x10	EA	15
34	0.63.D06912.08014	Cylindric head screw, DIN 6912 - M8x14	EA	96
35	0.63.WN7381.05006	Round head flange screw, M5x6, WN7381	EA	4
36	0.63.WN7381.05008	Round head flange screw, M5x8, WN7381	EA	14
37	0.63.WN7381.05008	Round head flange screw, M5x8, WN7381	EA	31
38	1.20.2E0	Connector, universal	EA	6
39	1.20.2F0	Connector, universal	EA	2
40	1.20.2H0	Connector, universal	EA	1
41	1.21.3E0	Connector, universal	EA	10
42	1.21.3F0	Connector, universal	EA	11
43	1.21.4E0	Connector, universal	EA	7
44	1.31.HM5	Threaded plate H, M5	EA	4
45	1.32.4EM5	T-Nut for subsequent insertion, w. spring E, M5	EA	14


Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
46	1.32.4EM8	T-Nut for subsequent insertion, w. spring E, M8	EA	96
47	1.32.4FM5	T-Nut for subsequent insertion, w. spring F, M5	EA	31
48	1.32.4FM8	T-Nut for subsequent insertion, w. spring F, M8	EA	15
49	1.46.204.1720A	Cover cap for angle GD-Zn, 17x20	EA	26



Total Weight:

55.43 kg (122.21 lbs)

Isometric view
Some accessories may not be shown


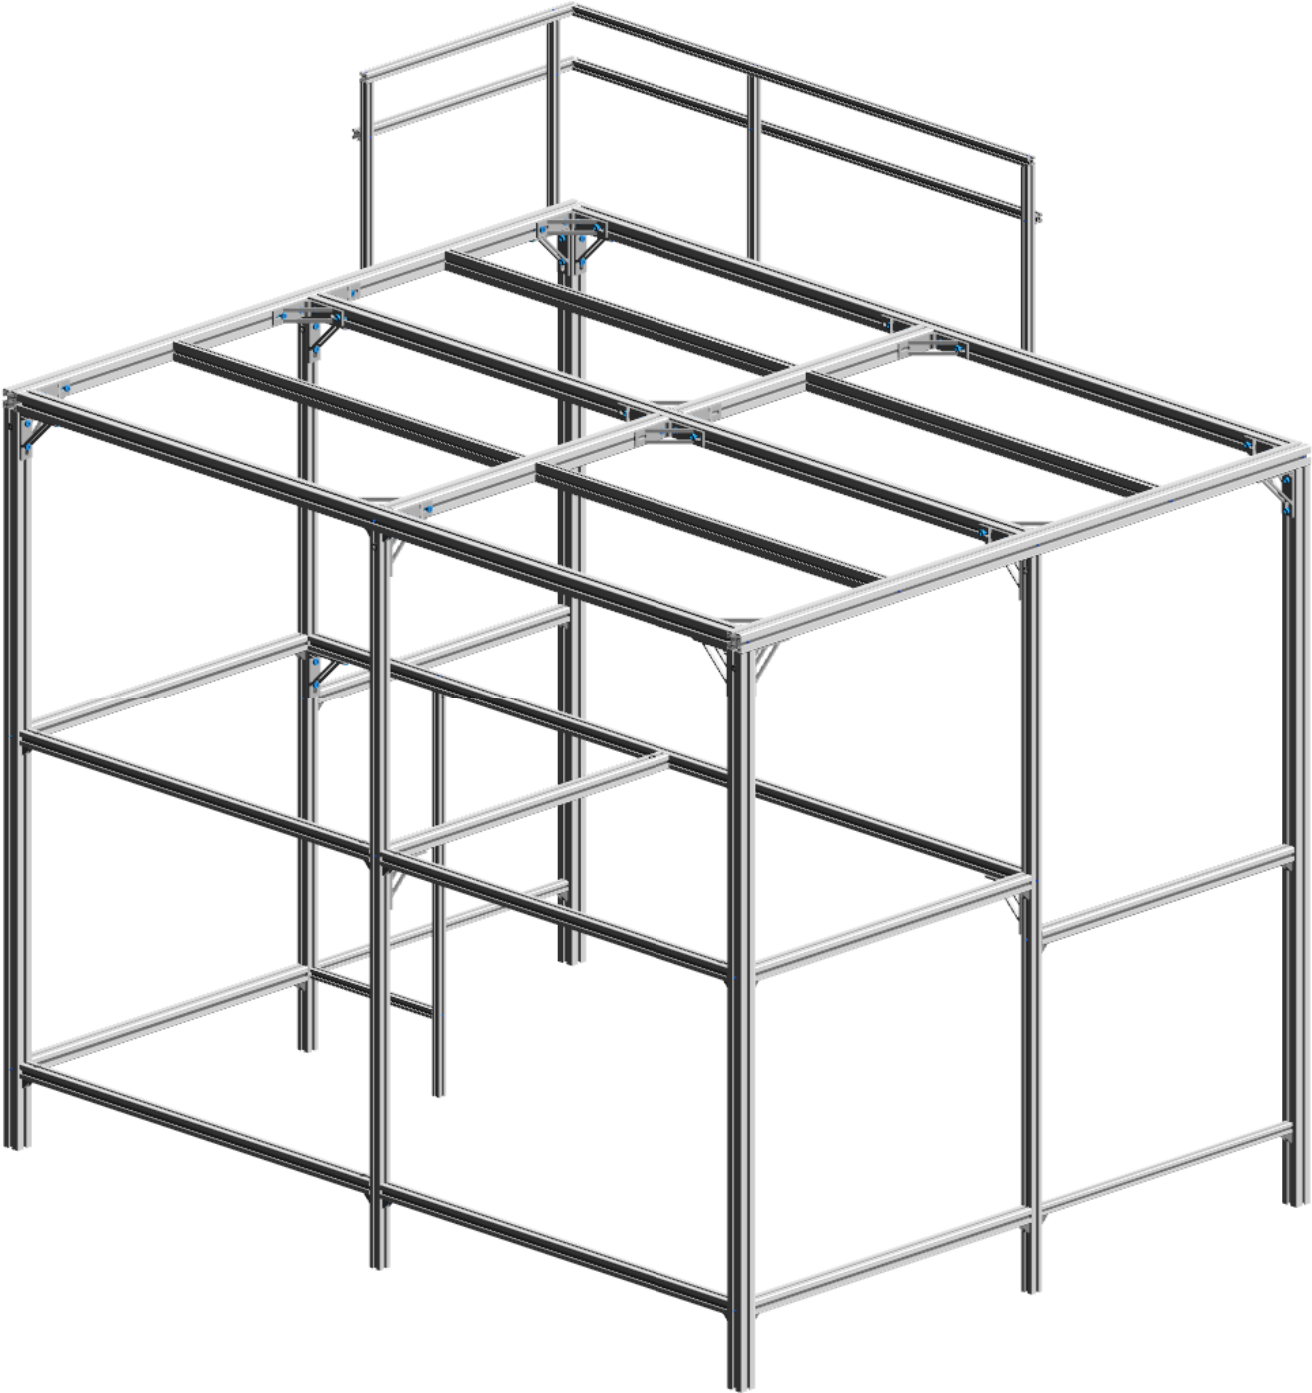


Multiview

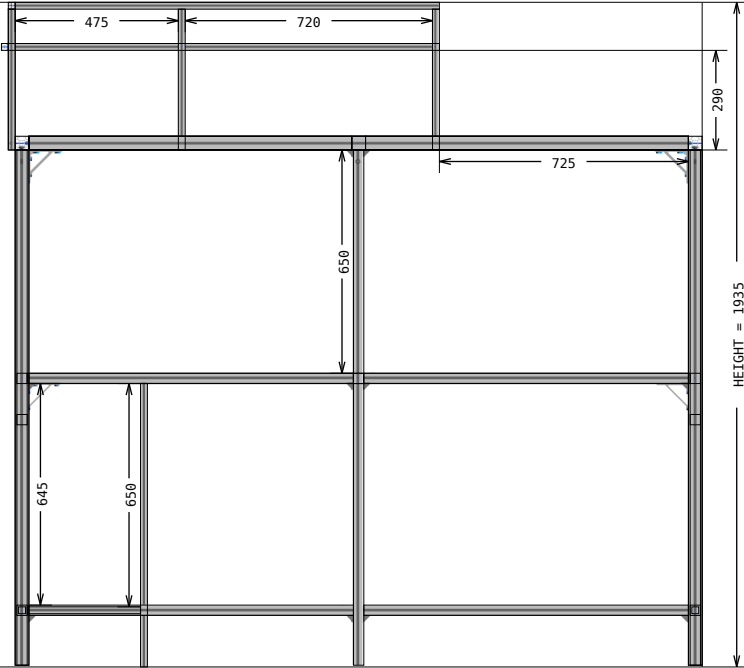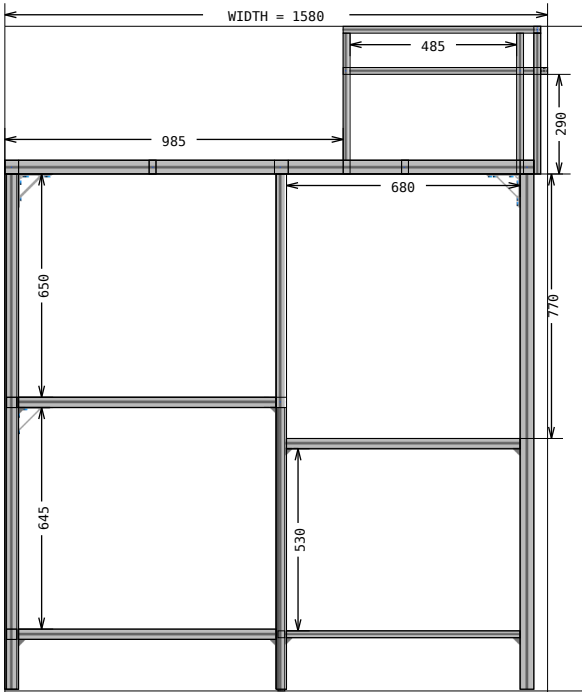

FRONT


LEFT

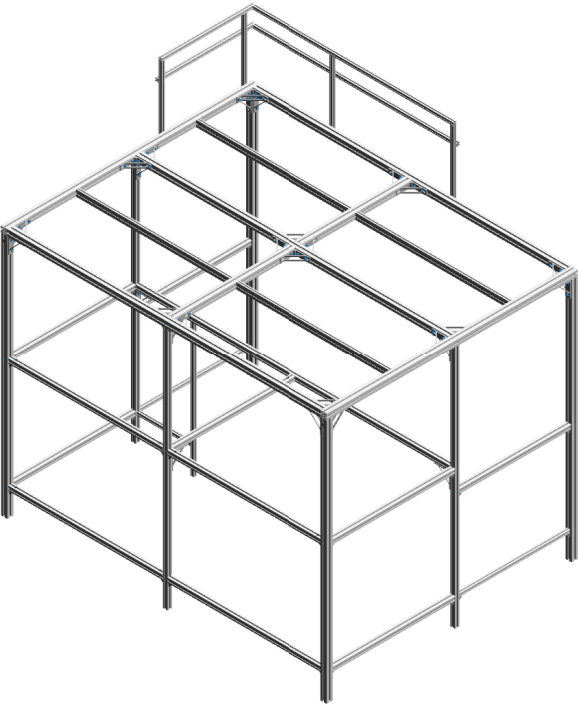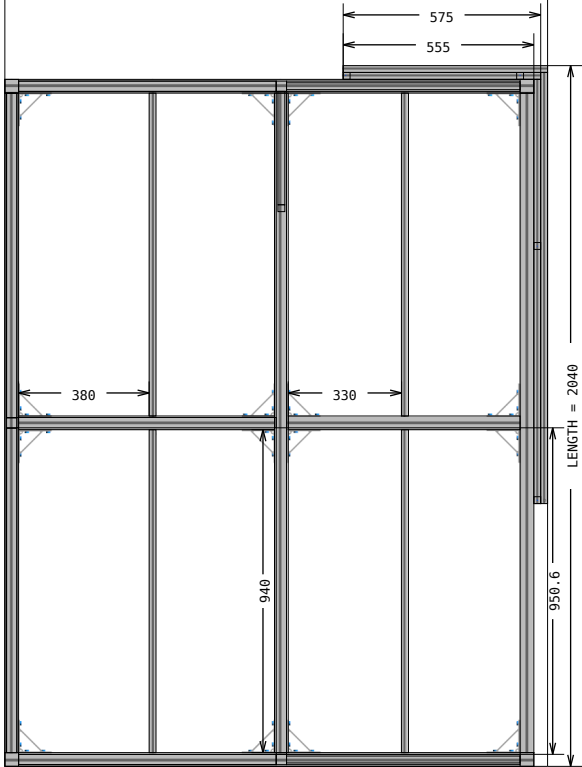


TOP

ISOMETRIC

Exploded view

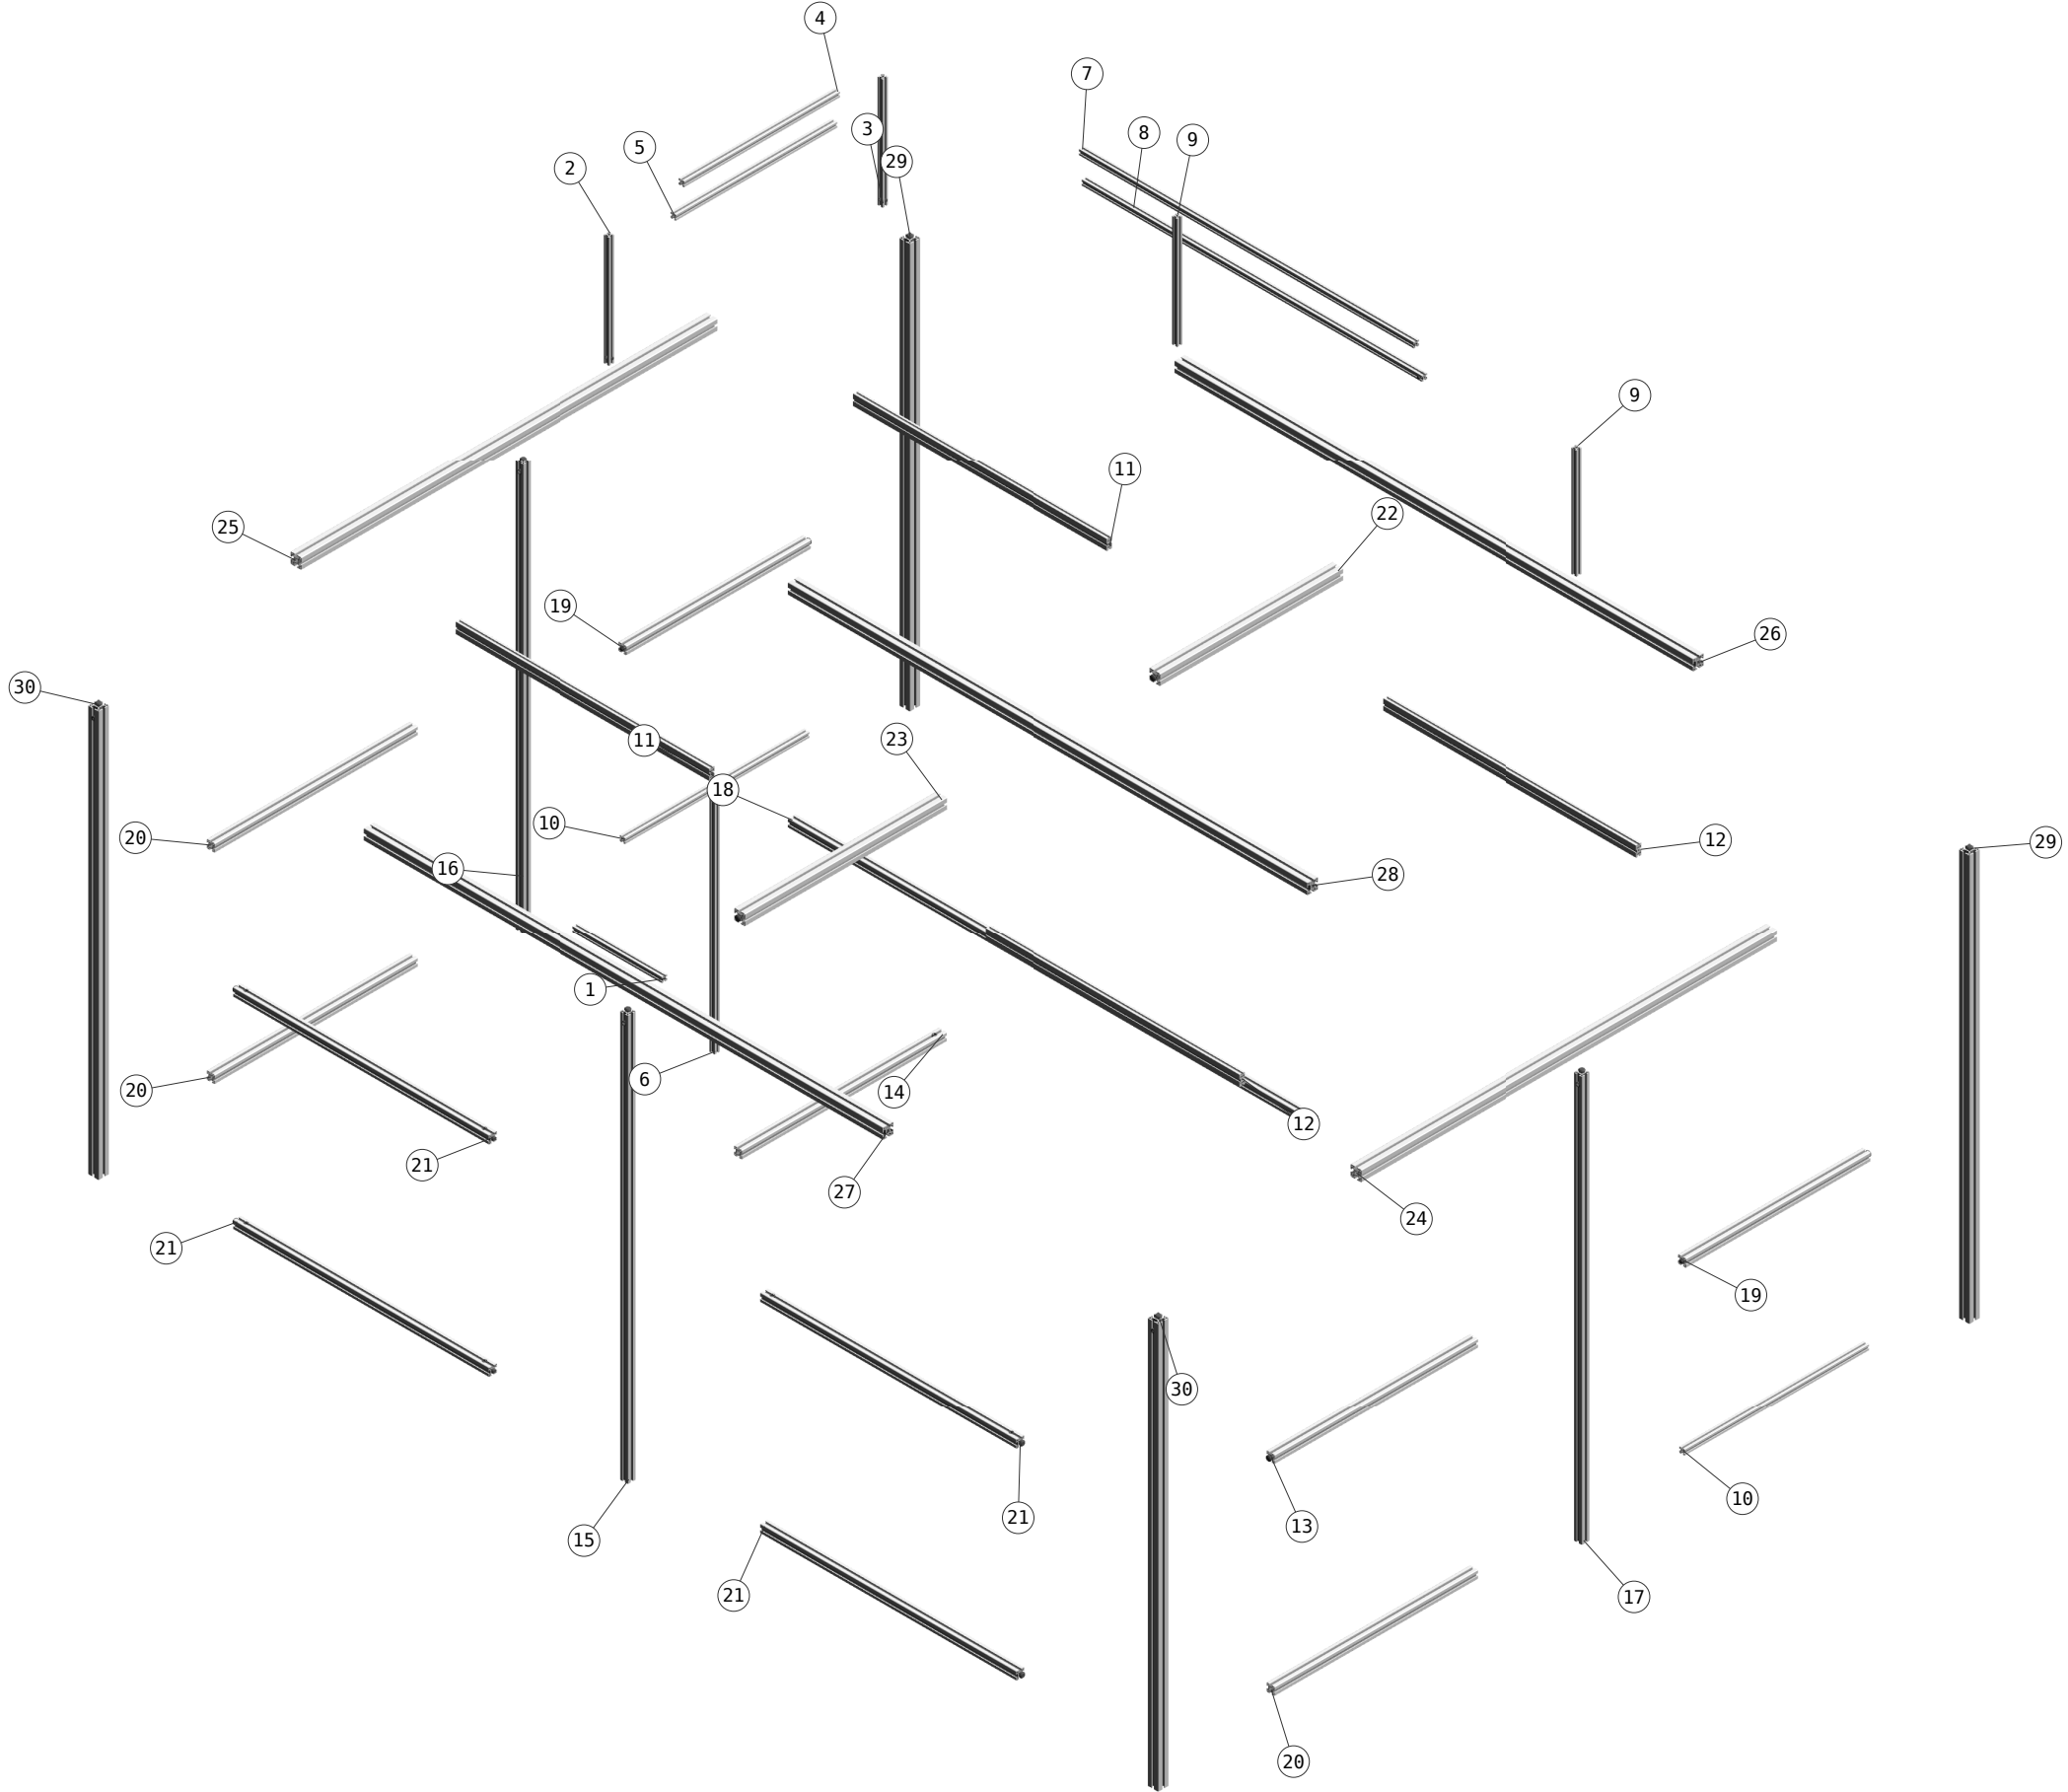

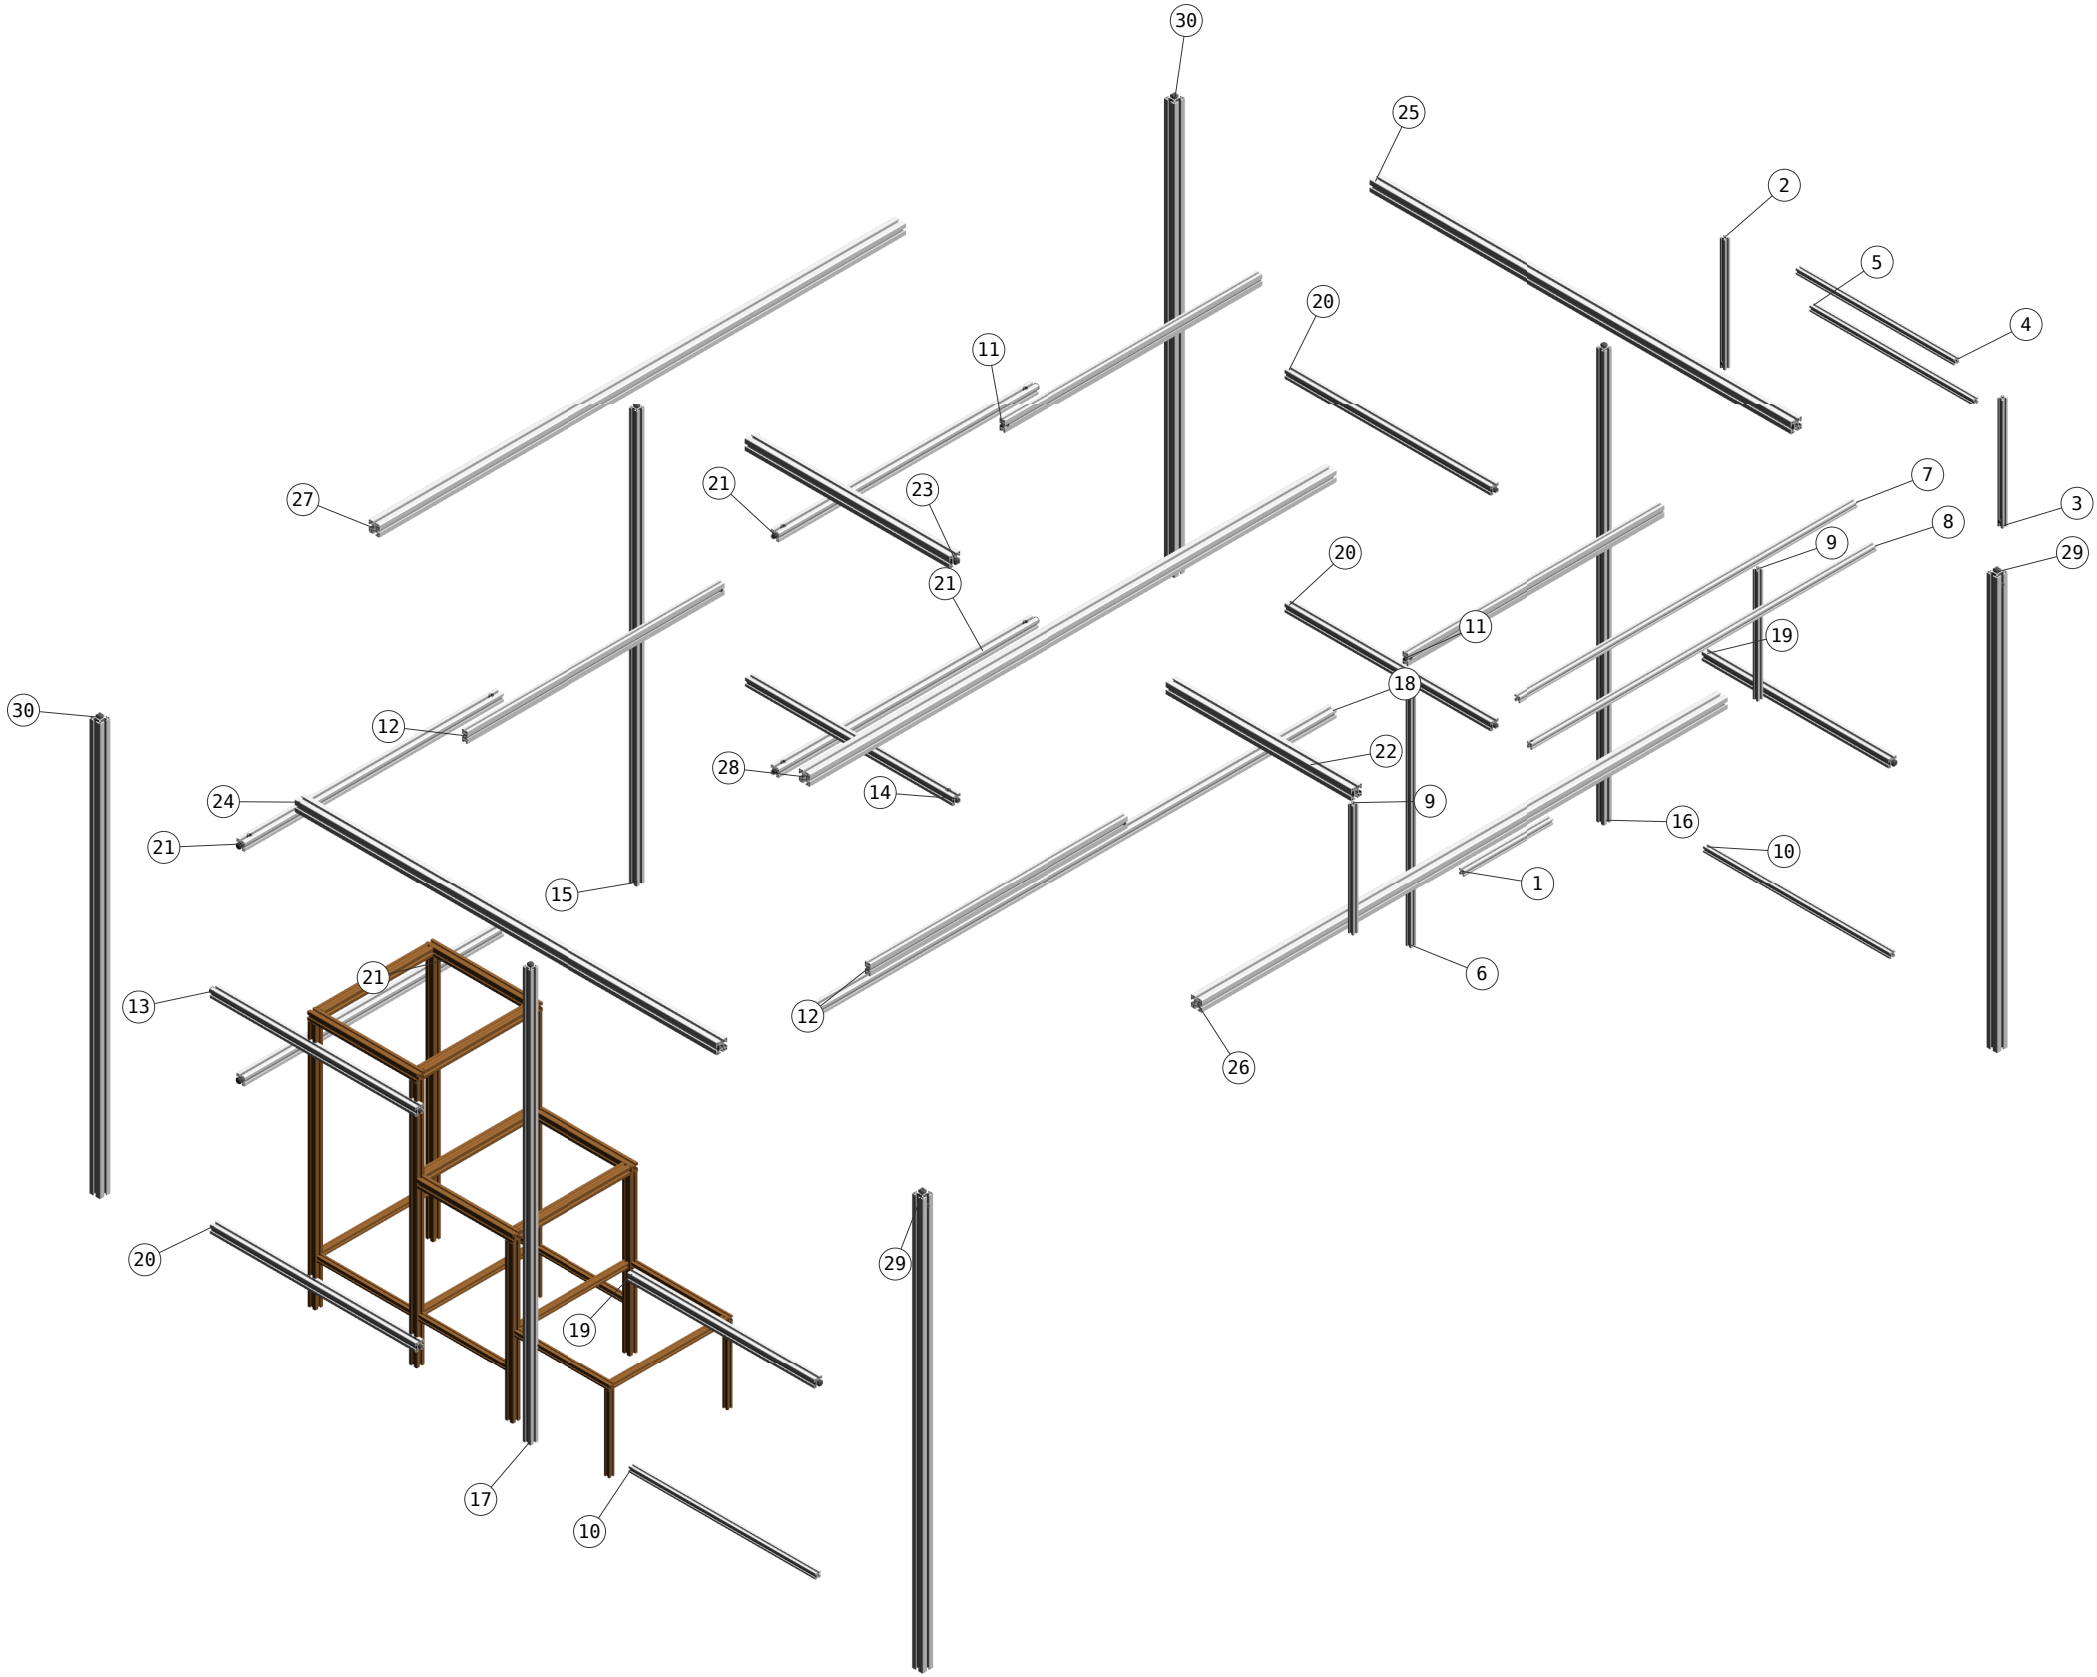


Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.10.020020.43LP-AA2A00/330	Profile 20x20, 4H, light, plain	1.20.2F0, Connector, universal	1
2	1.10.020020.43LP-A00A00/410	Profile 20x20, 4H, light, plain	1.20.2E0, Connector, universal	1
3	1.10.020020.43LP-A00A00/410	Profile 20x20, 4H, light, plain	1.20.2E0, Connector, universal	1
6	1.10.020020.43LP-AA4A00/825	Profile 20x20, 4H, light, plain	1.20.2F0, Connector, universal	1
8	1.10.020020.43LP-A00A00/1255	Profile 20x20, 4H, light, plain	1.20.2H0, Connector, universal	1
11	1.10.020040.44SP-A00AA4/940	Profile 20x40, 4H, heavy, plain	1.20.2E0, Connector, universal	2
12	1.10.020040.44SP-AA2A00/940	Profile 20x40, 4H, heavy, plain	1.20.2E0, Connector, universal	2
13	1.11.030030.43LP-AA4AA4/750	Profile 30x30, 4F, light, plain	1.21.3E0, Connector, universal	1
			1.21.3F0, Connector, universal	1
14	1.11.030030.43LP-A00AA4/755	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	1
15	1.11.030030.43LP-AA4A00/1500	Profile 30x30, 4F, light, plain	1.21.3E0, Connector, universal	1
16	1.11.030030.43LP-AA4A00/1500	Profile 30x30, 4F, light, plain	1.21.3E0, Connector, universal	1
17	1.11.030030.43LP-AA4A00/1500	Profile 30x30, 4F, light, plain	1.21.3E0, Connector, universal	1
19	1.11.030030.43LP-AA4AA4/680	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	2
			1.21.3E0, Connector, universal	2
20	1.11.030030.43LP-AA4A00/750	Profile 30x30, 4F, light, plain	1.21.3F0, Connector, universal	3
21	1.11.030030.43LP-AA4AA4/945	Profile 30x30, 4F, light, plain	1.21.3E0, Connector, universal	4
			1.21.3F0, Connector, universal	4
22	1.11.040040.43LP-AA4A00/675	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	1
23	1.11.040040.43LP-AA4AA4/745	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	2
29	1.11.040040.43LP-A00AA4/1500	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	2
30	1.11.040040.43LP-A00AA4/1500	Profile 40x40, 4E, light, plain	1.21.4E0, Connector, universal	2
31	1.46.204.1720.2	Angle GD-Zn, 17x20, powder-coated	1.46.204.1720A, Cover cap for angle GD-Zn, 17x20	26
			1.32.4FM5, T-Nut for subsequent insertion, w. spring F, M5	31
			1.31.HM5, Threaded plate H, M5	4
			0.63.WN7381.05006, Round head flange screw, M5x6, WN7381	4
			0.63.WN7381.05008, Round head flange screw, M5x8, WN7381	45
			1.32.4EM5, T-Nut for subsequent insertion, w. spring E, M5	14
32	1.46.21039	Angle 100x100, dia: 9.0 B30	1.32.4EM8, T-Nut for subsequent insertion, w. spring E, M8	96
			0.63.D06912.08010, Cylindric head screw, DIN 6912 - M8x10	15
			0.63.D06912.08014, Cylindric head screw, DIN 6912 - M8x14	96
			1.32.4FM8, T-Nut for subsequent insertion, w. spring F, M8	15


Profile machining details




DRAWING 1, Pos 2
SIDE 1, bar length: 410 mm

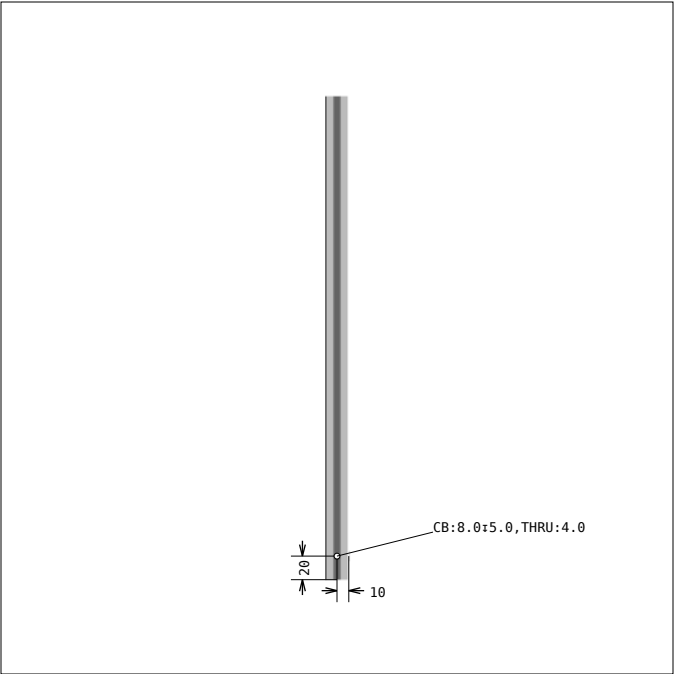

DRAWING 1, Pos 2
SIDE 2




DRAWING 1, Pos 2
SIDE 3

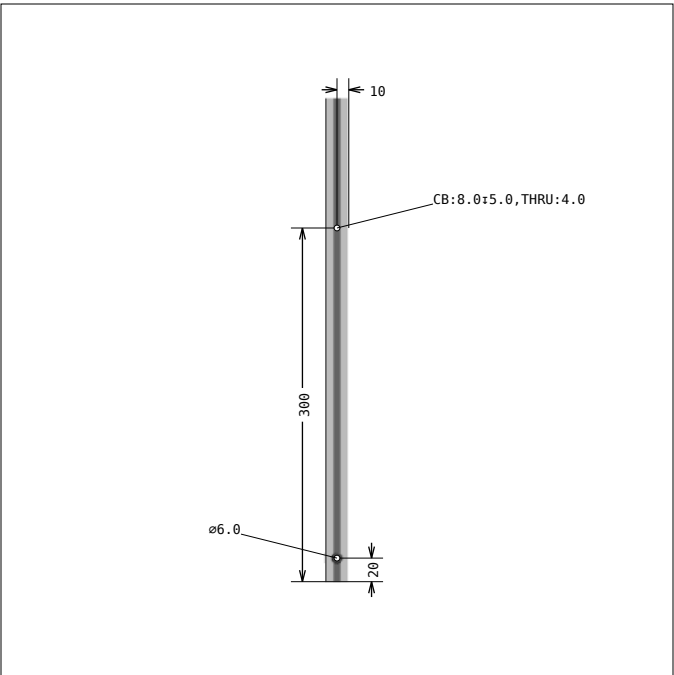

DRAWING 1, Pos 2
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

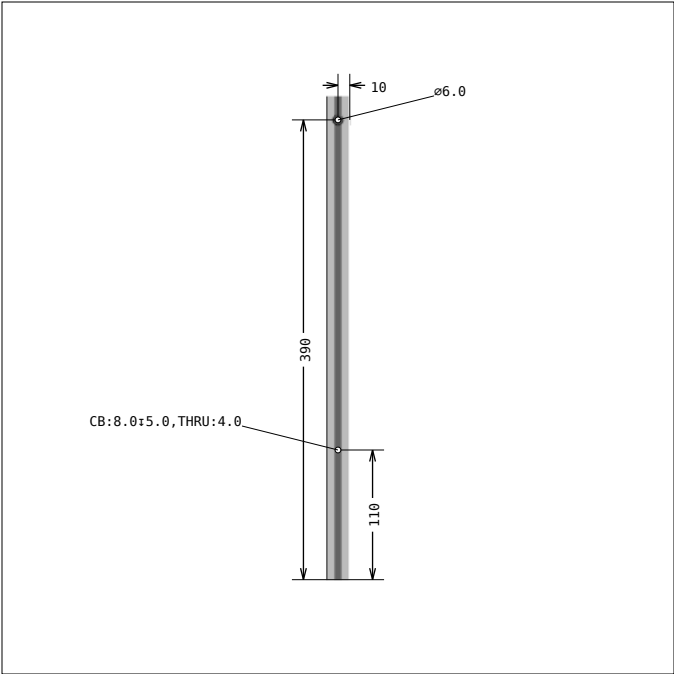


DRAWING 2, Pos 3
SIDE 1, bar length: 410 mm



DRAWING 2, Pos 3
SIDE 2

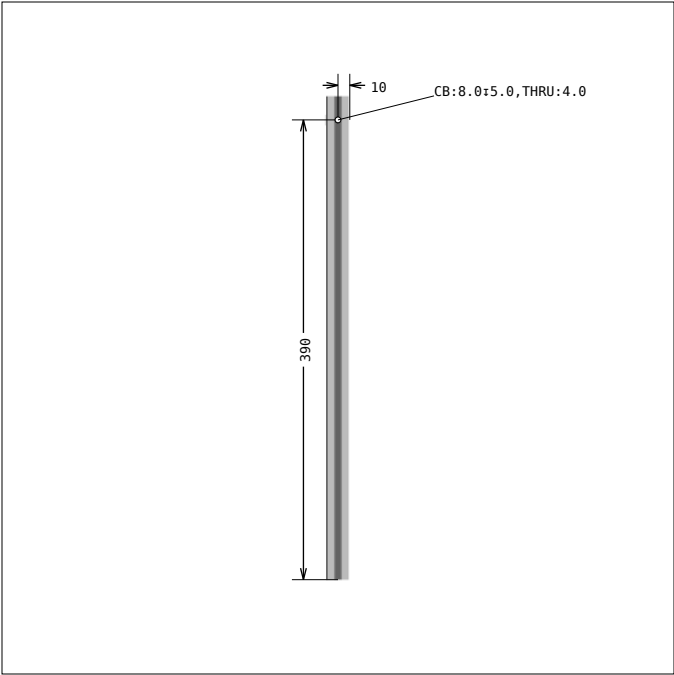


DRAWING 2, Pos 3
SIDE 3

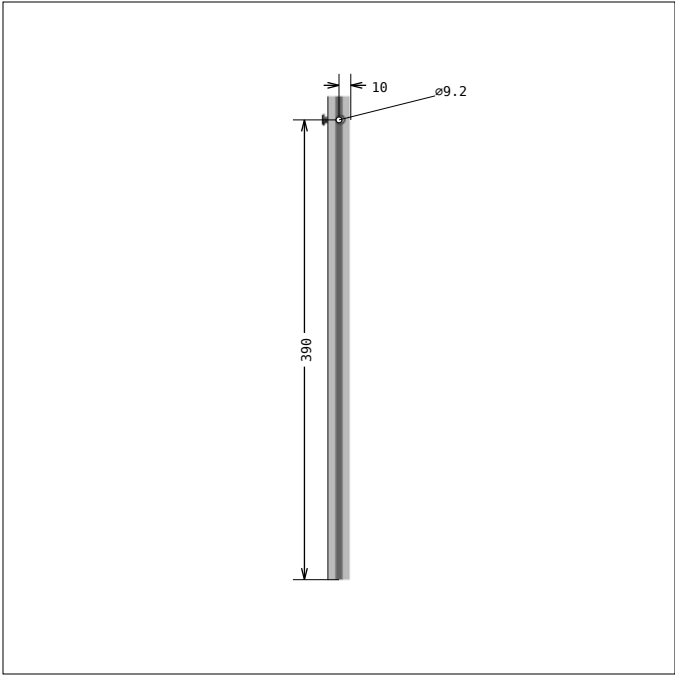


DRAWING 2, Pos 3
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




**DRAWING 3, Pos 4
SIDE 1, bar length: 575 mm**



**DRAWING 3, Pos 4
SIDE 2**

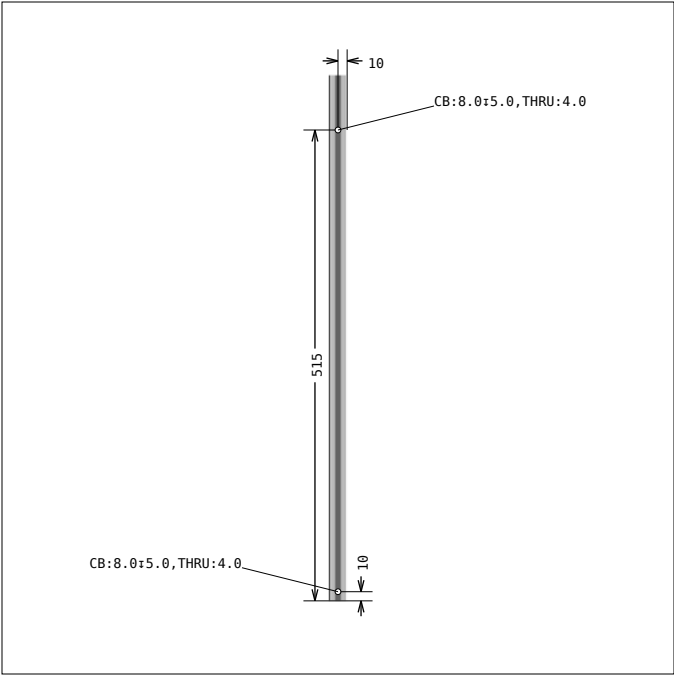


**DRAWING 3, Pos 4
SIDE 3**

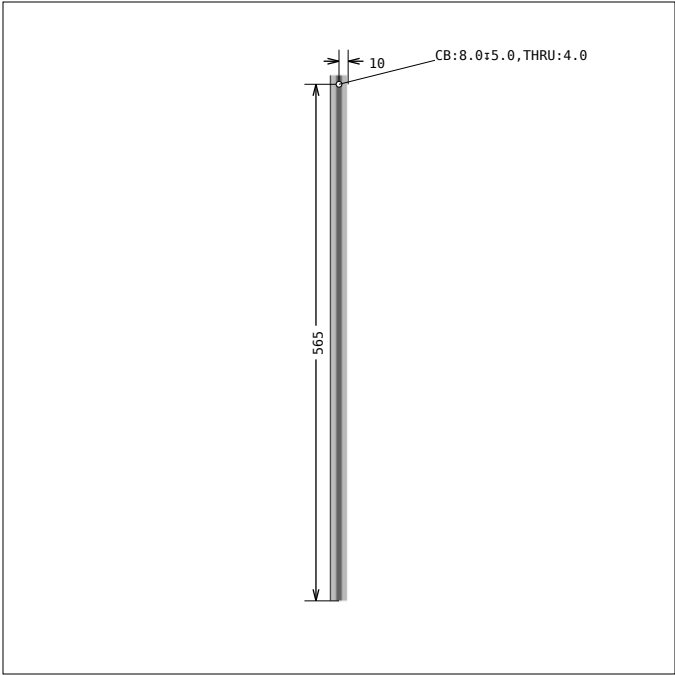


**DRAWING 3, Pos 4
SIDE 4**

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




**DRAWING 4, Pos 5
SIDE 1, bar length: 595 mm**



**DRAWING 4, Pos 5
SIDE 2**

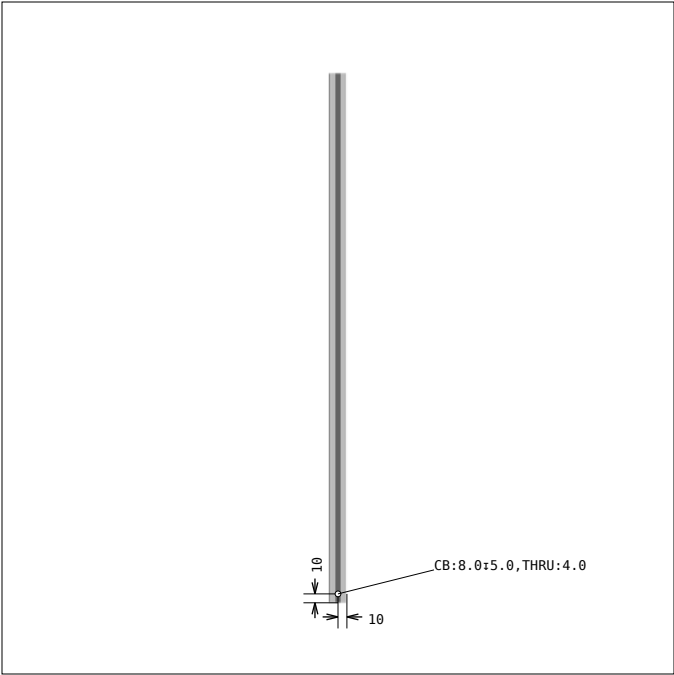


**DRAWING 4, Pos 5
SIDE 3**




**DRAWING 4, Pos 5
SIDE 4**

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




**DRAWING 5, Pos 6
SIDE 1, bar length: 825 mm**



**DRAWING 5, Pos 6
SIDE 2**




**DRAWING 5, Pos 6
SIDE 3**

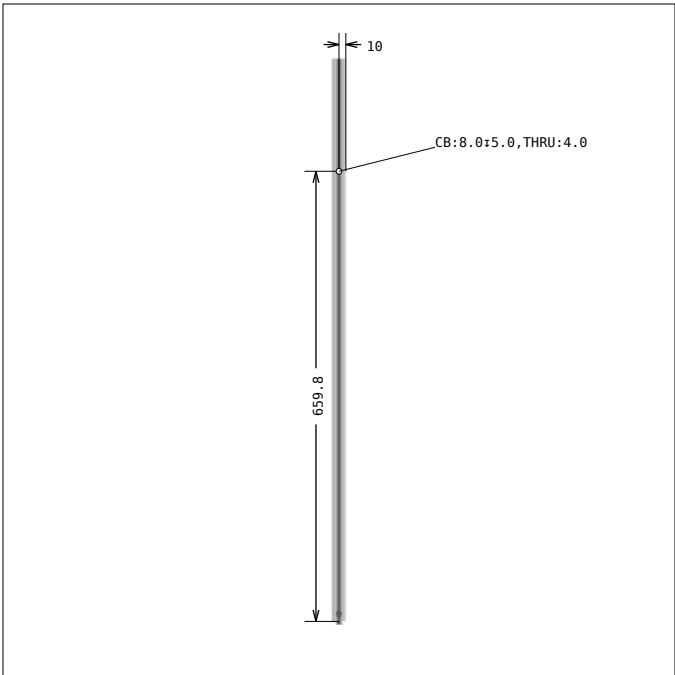


**DRAWING 5, Pos 6
SIDE 4**

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 6, Pos 7
SIDE 1, bar length: 1235 mm



DRAWING 6, Pos 7
SIDE 2




DRAWING 6, Pos 7
SIDE 3

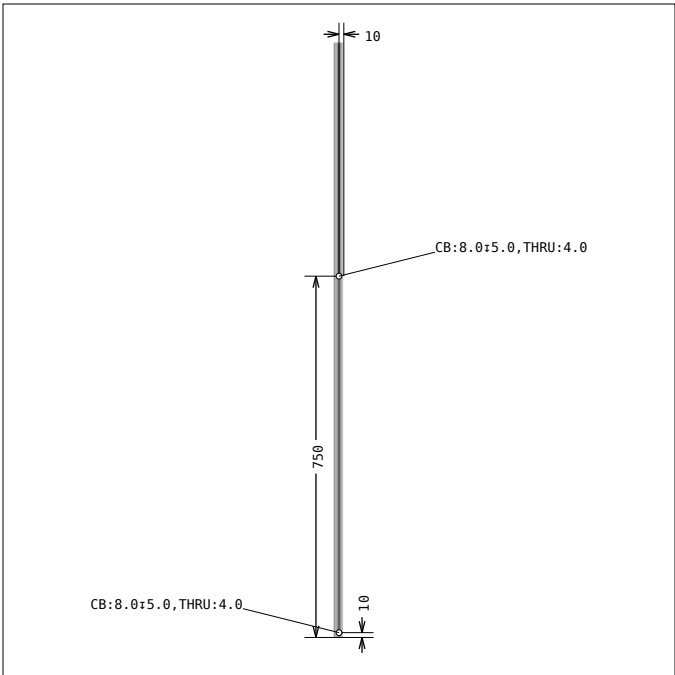


DRAWING 6, Pos 7
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

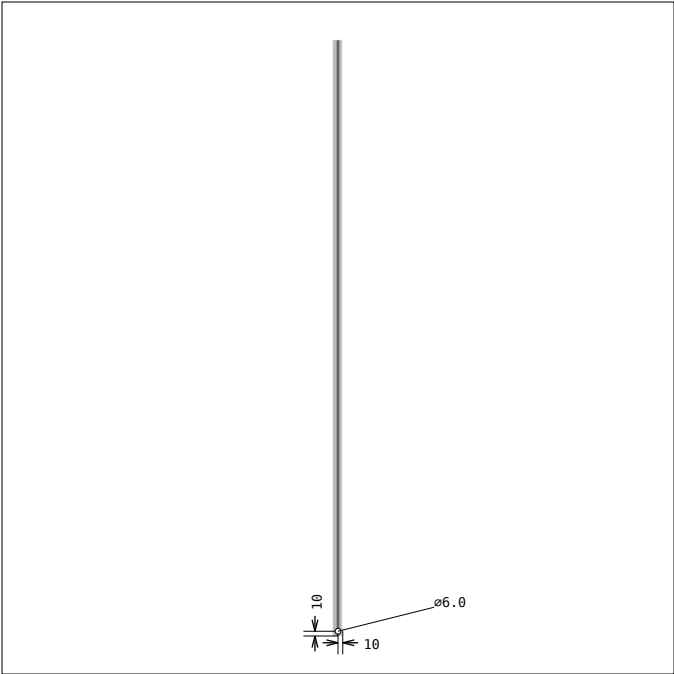


DRAWING 7, Pos 8
SIDE 1, bar length: 1255 mm



DRAWING 7, Pos 8
SIDE 2




DRAWING 7, Pos 8
SIDE 3

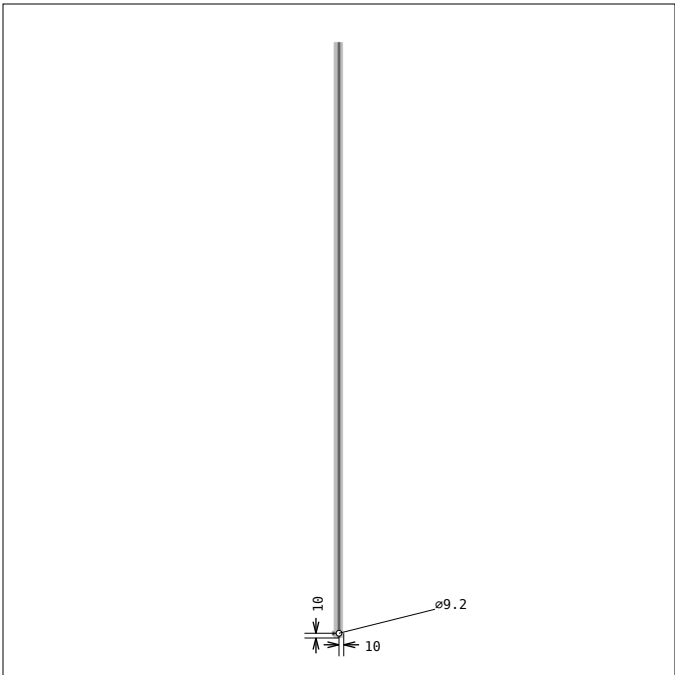


DRAWING 7, Pos 8
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

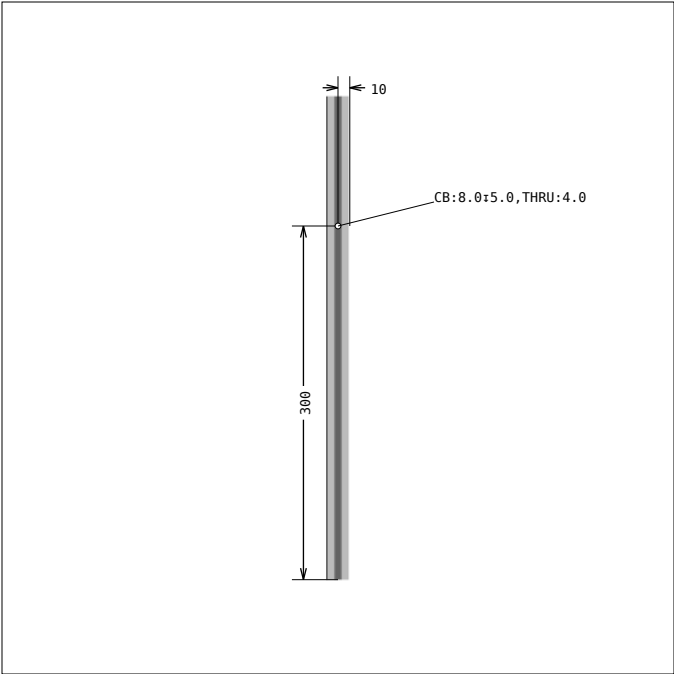


DRAWING 8, Pos 9
SIDE 1, bar length: 410 mm



DRAWING 8, Pos 9
SIDE 2

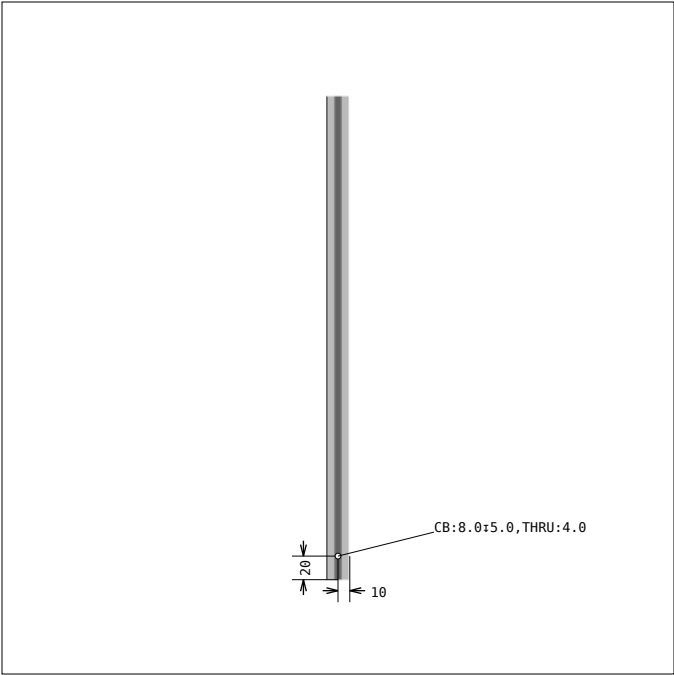


DRAWING 8, Pos 9
SIDE 3




DRAWING 8, Pos 9
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

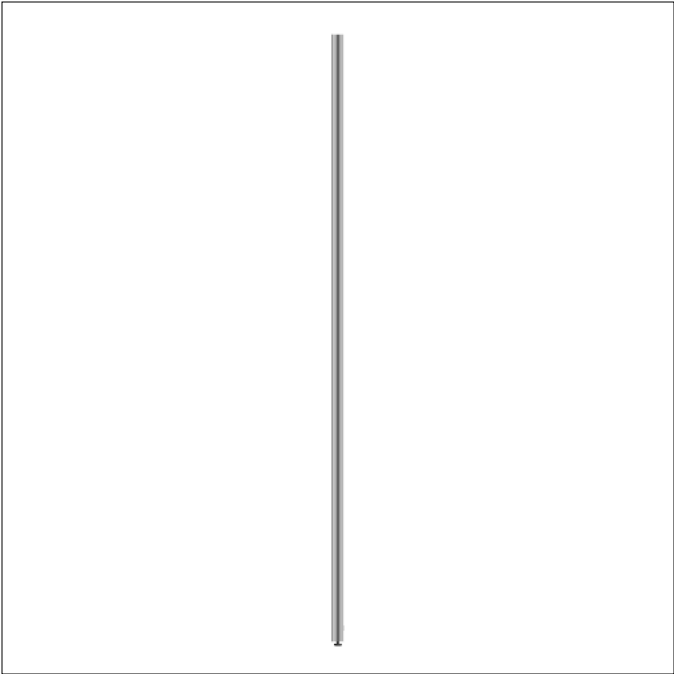


DRAWING 9, Pos 15
SIDE 1, bar length: 1500 mm

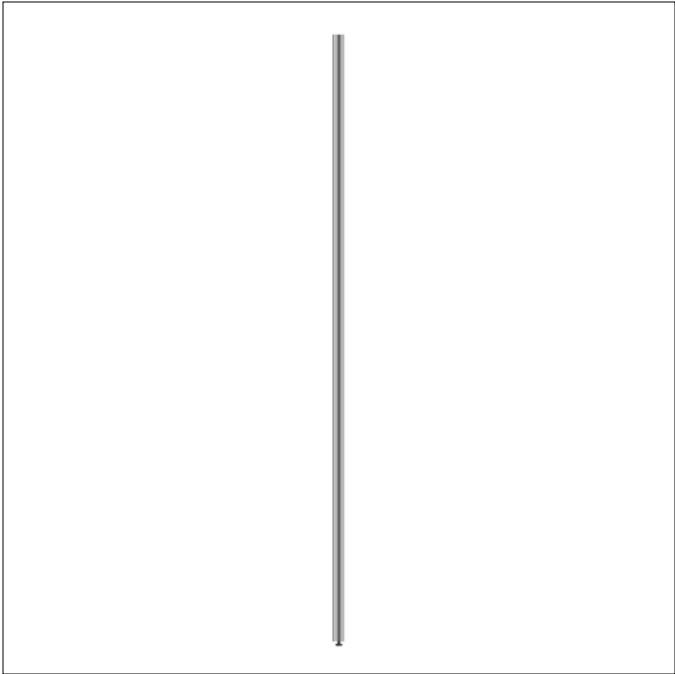

DRAWING 9, Pos 15
SIDE 2

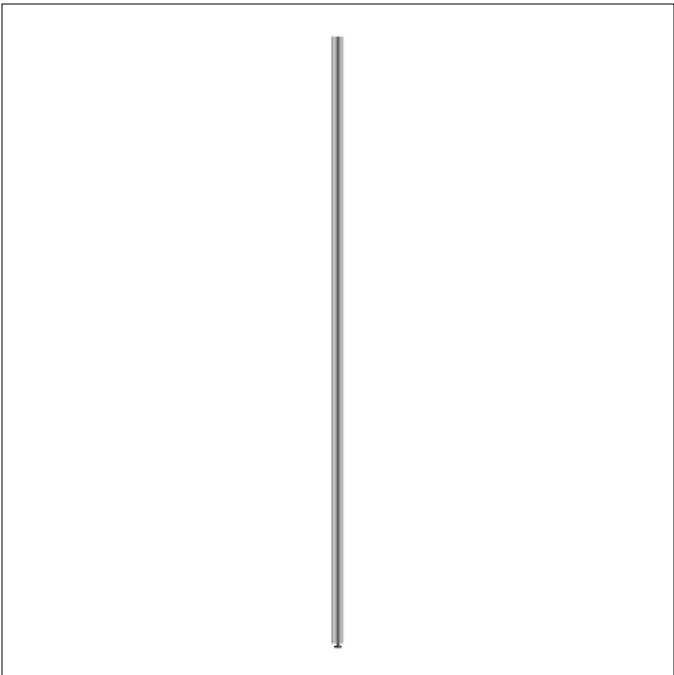


DRAWING 9, Pos 15
SIDE 3

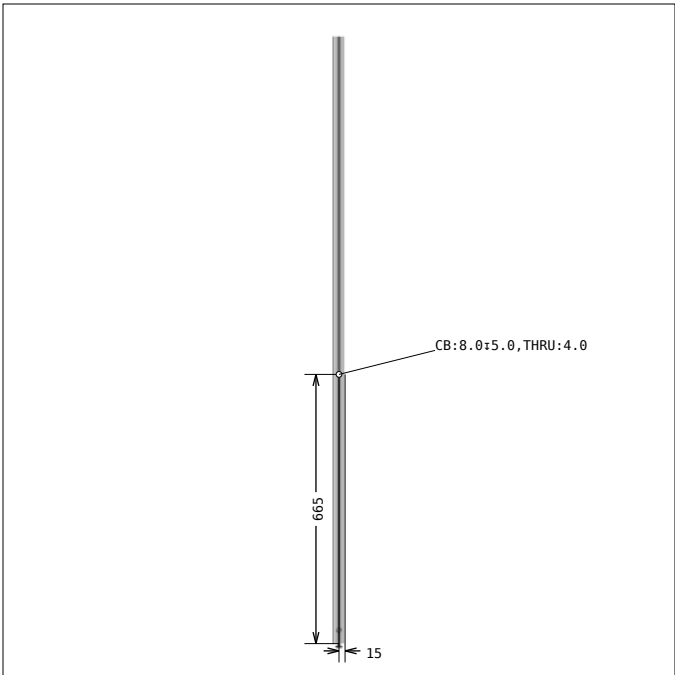


DRAWING 9, Pos 15
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

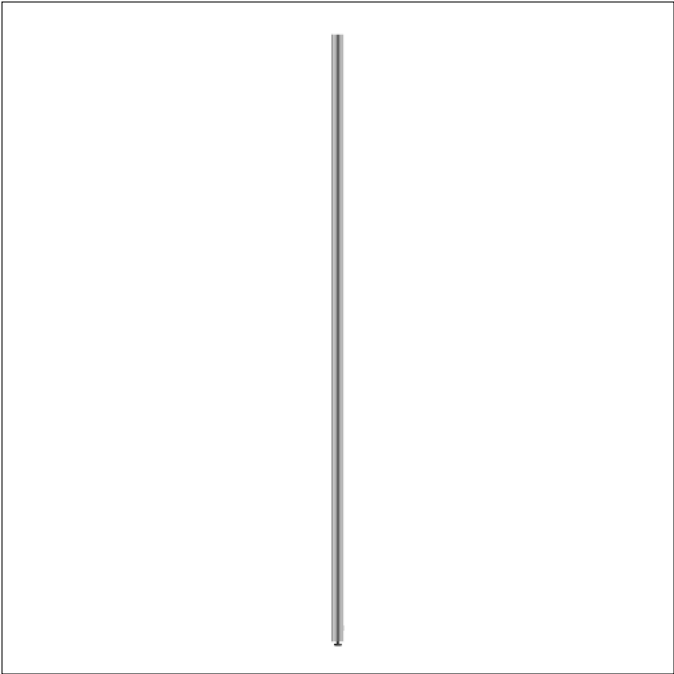


DRAWING 10, Pos 16
SIDE 1, bar length: 1500 mm

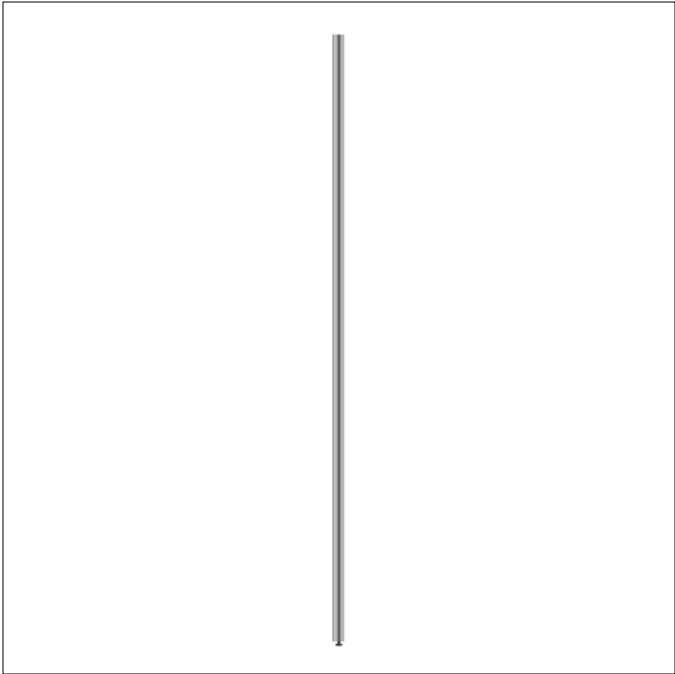

DRAWING 10, Pos 16
SIDE 2

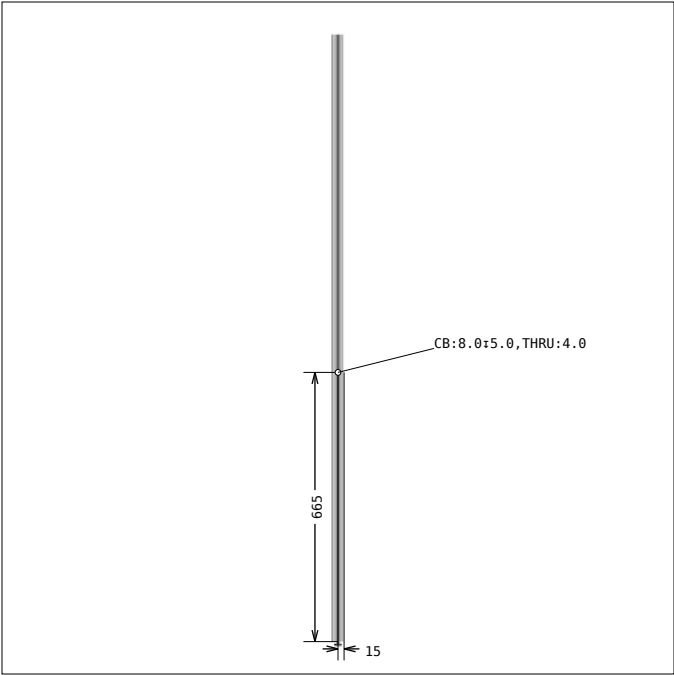


DRAWING 10, Pos 16
SIDE 3

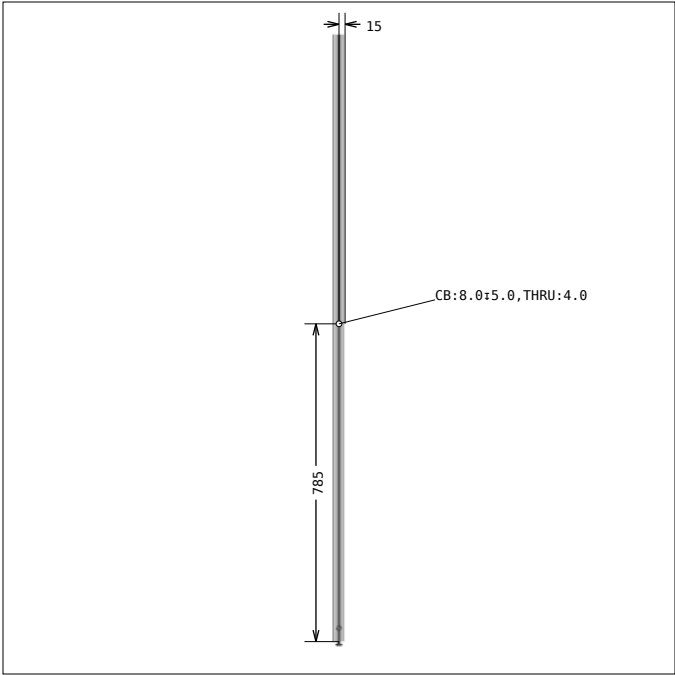


DRAWING 10, Pos 16
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

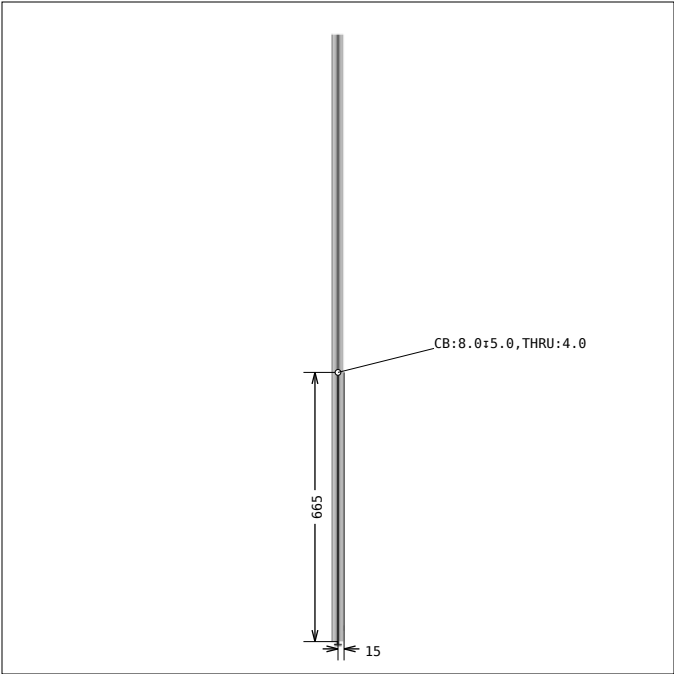


DRAWING 11, Pos 17
SIDE 1, bar length: 1500 mm

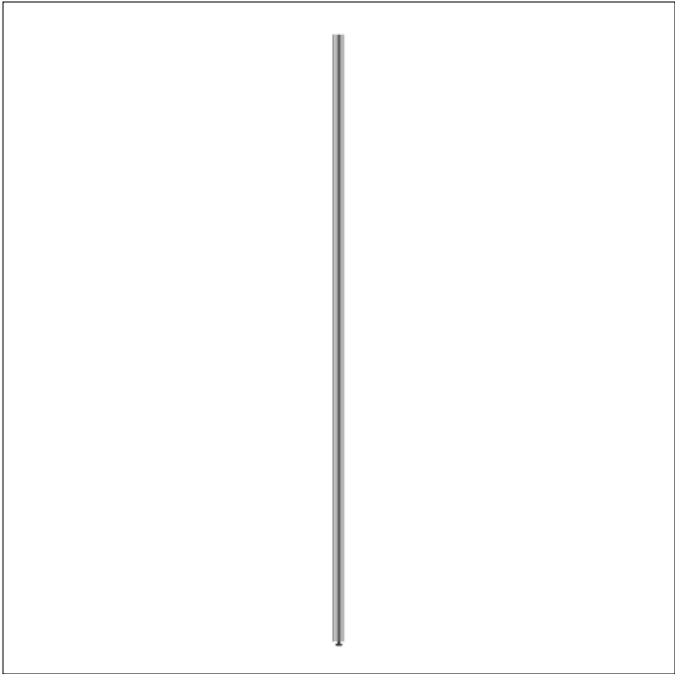

DRAWING 11, Pos 17
SIDE 2

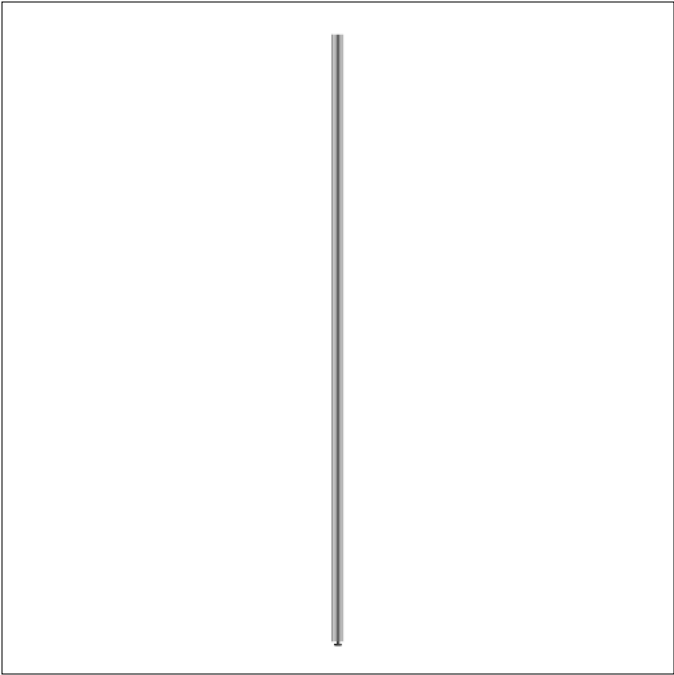


DRAWING 11, Pos 17
SIDE 3

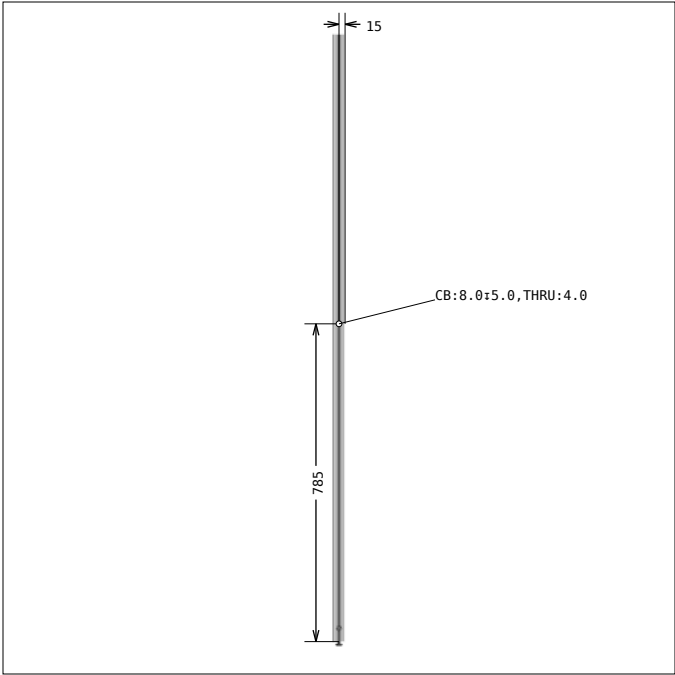


DRAWING 11, Pos 17
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details

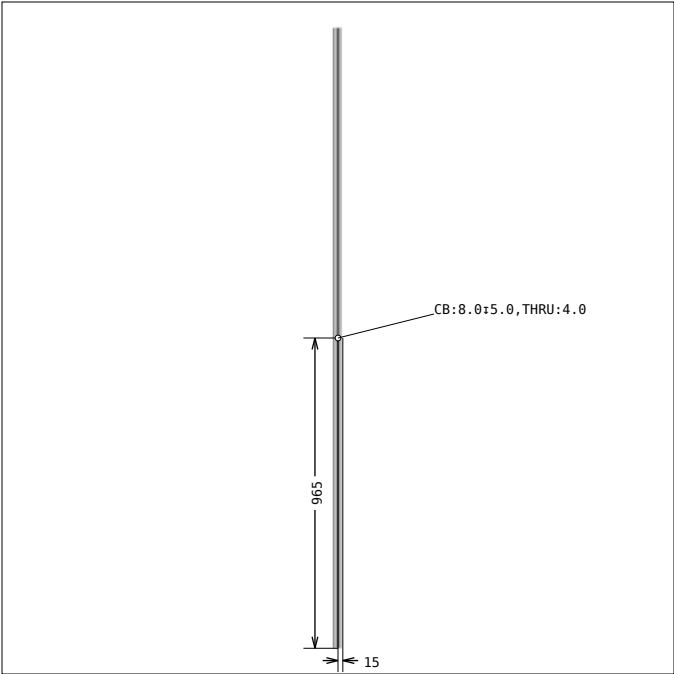


DRAWING 12, Pos 18
SIDE 1, bar length: 1930 mm

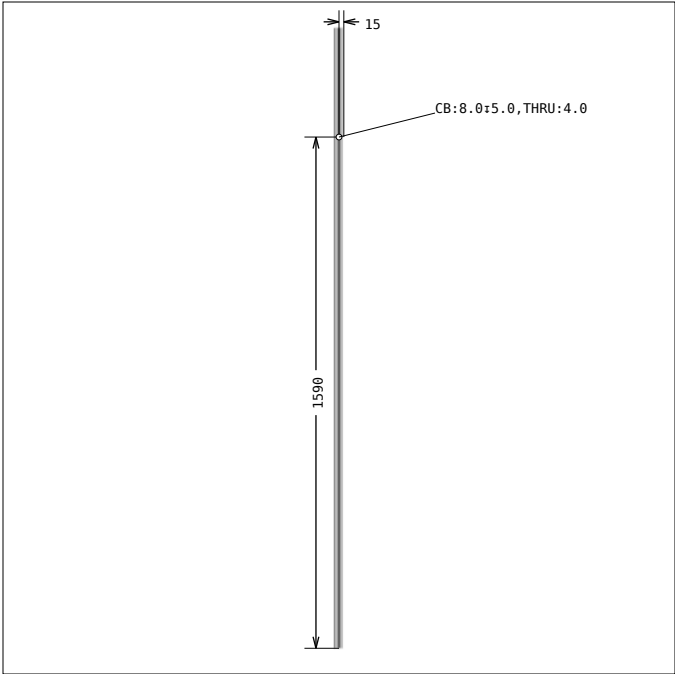

DRAWING 12, Pos 18
SIDE 2




DRAWING 12, Pos 18
SIDE 3




DRAWING 12, Pos 18
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 13, Pos 24
SIDE 1, bar length: 1540 mm



DRAWING 13, Pos 24
SIDE 2




DRAWING 13, Pos 24
SIDE 3

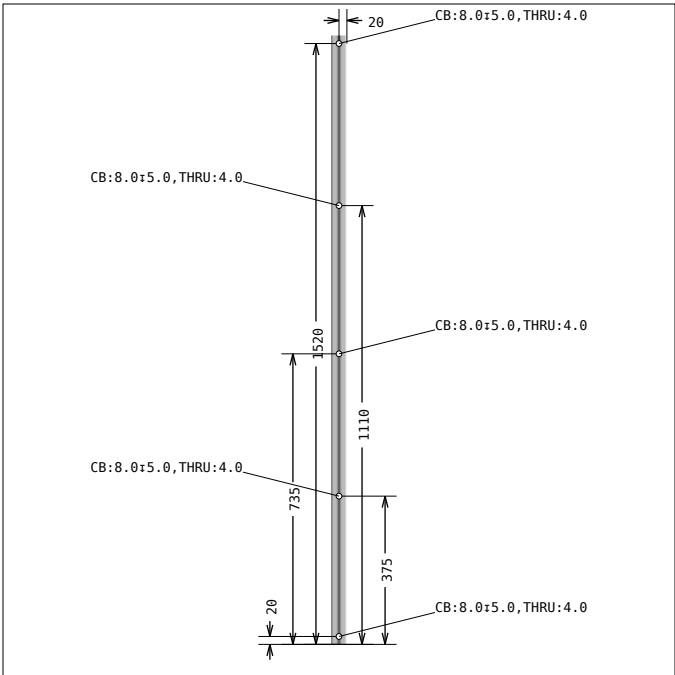


DRAWING 13, Pos 24
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 14, Pos 25
SIDE 1, bar length: 1540 mm

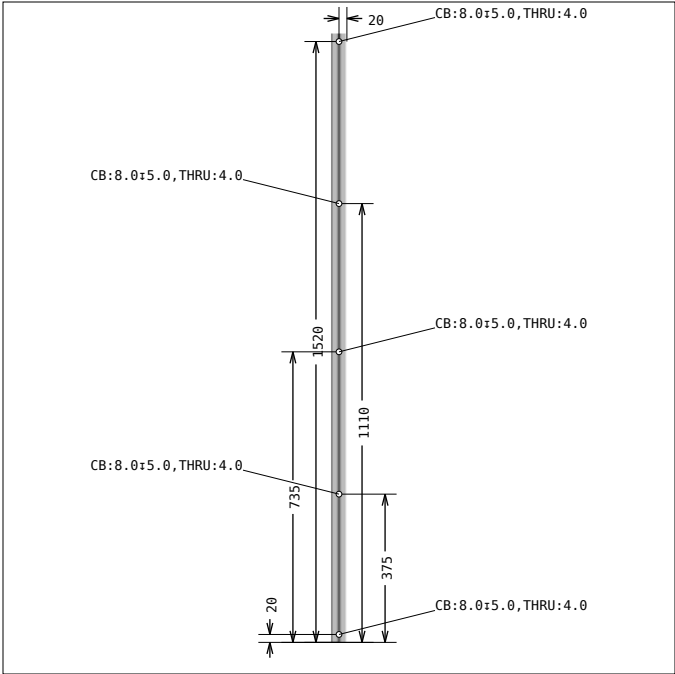

DRAWING 14, Pos 25
SIDE 2




DRAWING 14, Pos 25
SIDE 3




DRAWING 14, Pos 25
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 15, Pos 26
SIDE 1, bar length: 1920 mm



DRAWING 15, Pos 26
SIDE 2




DRAWING 15, Pos 26
SIDE 3

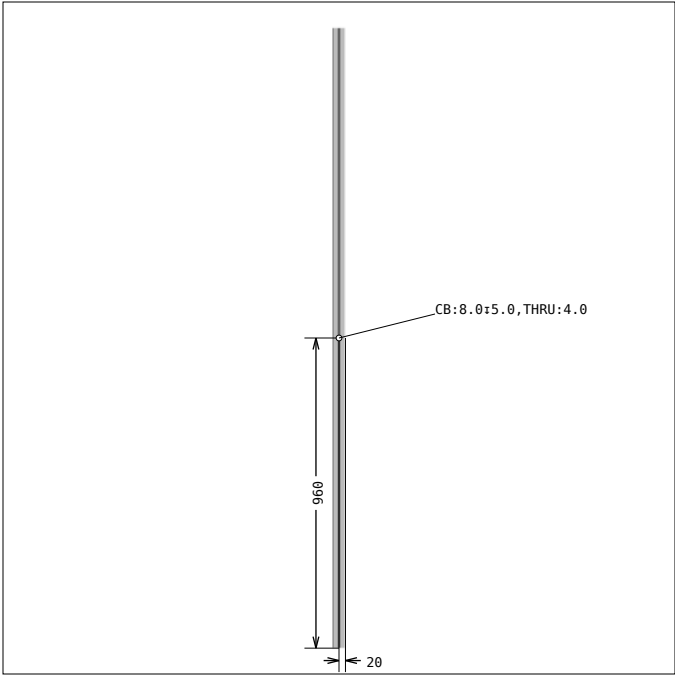


DRAWING 15, Pos 26
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 16, Pos 27
SIDE 1, bar length: 1920 mm

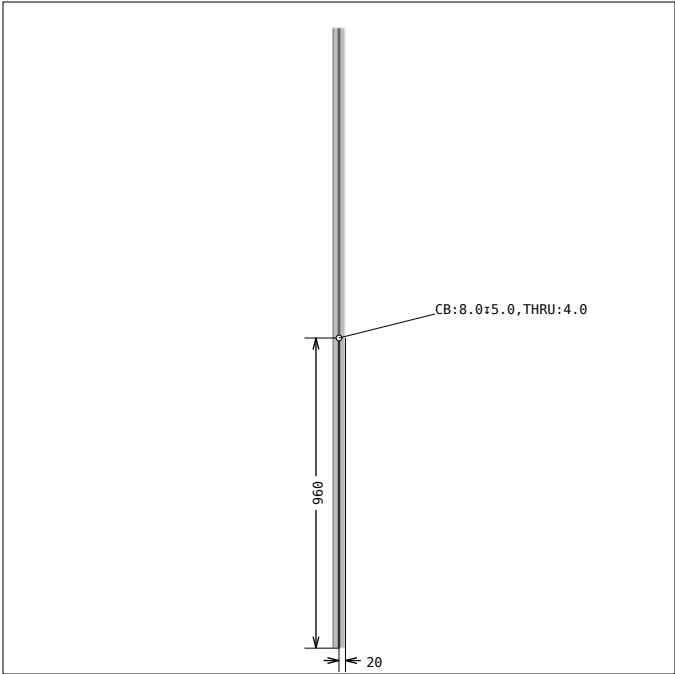

DRAWING 16, Pos 27
SIDE 2




DRAWING 16, Pos 27
SIDE 3




DRAWING 16, Pos 27
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 17, Pos 29
SIDE 1, bar length: 1500 mm



DRAWING 17, Pos 29
SIDE 2




DRAWING 17, Pos 29
SIDE 3

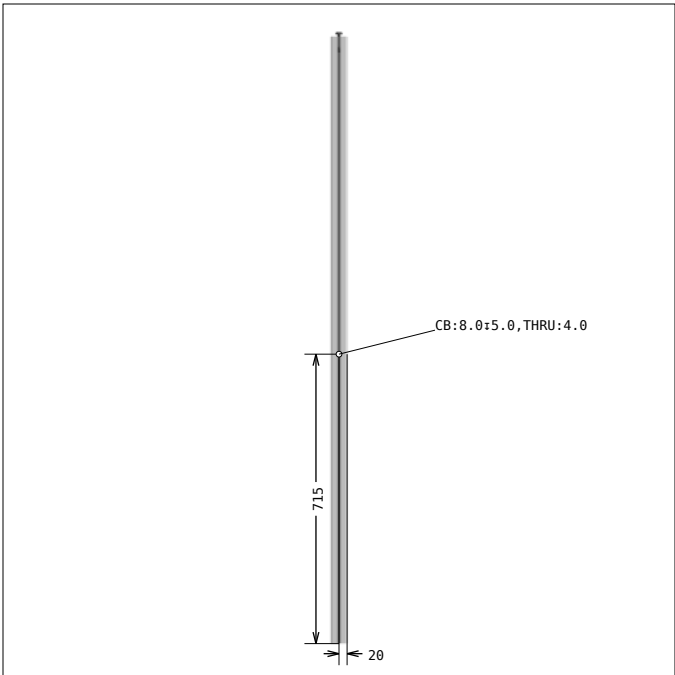


DRAWING 17, Pos 29
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Profile machining details




DRAWING 18, Pos 30
SIDE 1, bar length: 1500 mm



DRAWING 18, Pos 30
SIDE 2



DRAWING 18, Pos 30
SIDE 3

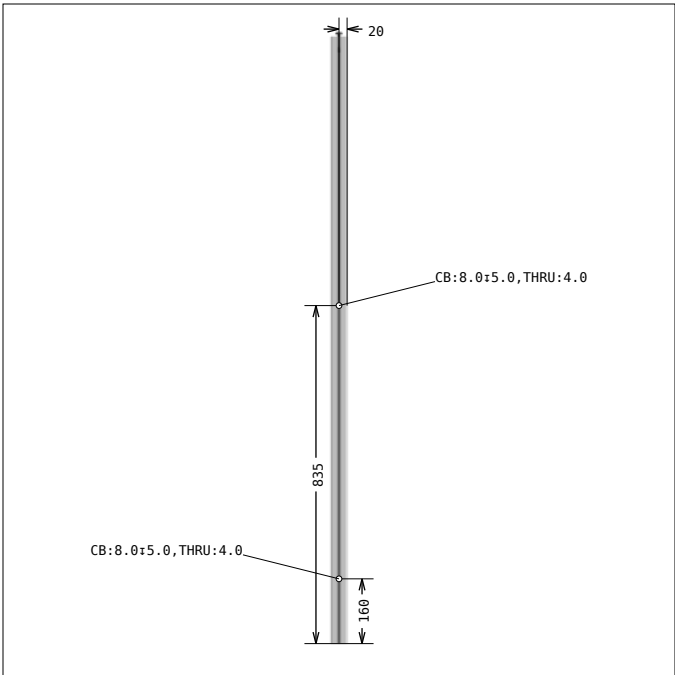


DRAWING 18, Pos 30
SIDE 4

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".


Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.040040.43LP	28 1920.0 27 1920.0 26 1920.0	229.5 mm
	23 745.0 29 1500.0 25 1540.0 24 1540.0	661.0 mm
	22 675.0 29 1500.0 30 1500.0 30 1500.0	811.0 mm
1.10.020020.43LP	4 575.0 5 595.0 10 680.0 10 680.0 6 825.0 7 1235.0 8 1255.0	130.5 mm
	1 330.0 3 410.0 2 410.0 9 410.0 9 410.0	4012.5 mm
1.11.030030.43LP	21 945.0 16 1500.0 15 1500.0 18 1930.0	111.0 mm
	13 750.0 14 755.0 21 945.0 21 945.0 21 945.0 17 1500.0	139.0 mm
	19 680.0 19 680.0 20 750.0 20 750.0 20 750.0	2372.5 mm
1.10.020040.44SP	12 940.0 11 940.0 12 940.0 11 940.0	2226.0 mm





Assembly hints

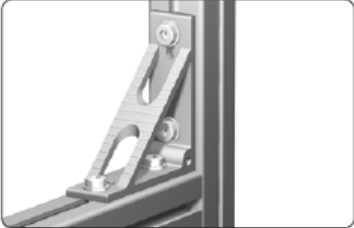ACCESSORY	1.46.21039	Angle 100x100, dia: 9.0 B30
 Mounting of cover panels  Support across the profile  Support of free-standing profiles Technical data material: aluminium strength: F22 surface: natural anodised Application For supporting of profiles and mounting of cover panels Comments Angles Alu are made from the angle profiles 1.19.141... The angles serve not only as reinforcements, but as mounting points panel elements or other parts.		



Assembly hints

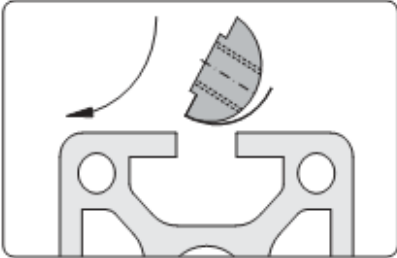ACCESSORY	1.32.4EM5	T-Nut for subsequent insertion, w. spring E, M5
	1.32.4EM8	T-Nut for subsequent insertion, w. spring E, M8
	1.32.4FM5	T-Nut for subsequent insertion, w. spring F, M5
	1.32.4FM8	T-Nut for subsequent insertion, w. spring F, M8
 Fixing with leaf spring  Insert front-sided and rotate Application Fastening element for screw-type connections Technical data Design steel: • material: steel • surface: galvanised Design stainless: • material: stainless steel 1.4305 • surface: pickled and passivated max. moment of torque: $M_{A, max}$		These t-nuts are easily inserted into assembled frames

Assembly hints

CONNECTOR	1.20.2E0	Connector, universal
	1.20.2F0	Connector, universal
	1.20.2H0	Connector, universal
	1.21.3E0	Connector, universal
	1.21.3F0	Connector, universal
	1.21.4E0	Connector, universal
 Insert the cross bushing  Push in the anchor  Pretension the anchor  Neck flush to the profile front side Comments For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side		Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.
ACCESSORY	1.46.204.1720.2	Angle GD-Zn, 17x20, powder-coated
 Application For supporting profiles and mounting various machine components  For mounting cross to the slot the noses can be broken off Technical data material: GD-Zn • angle: PA-GK 30 • cover cap: steel, galvanised • T-slot nut: steel, galvanised • screw: steel, galvanised surface: natural or aluminium coloured powder-coated		These corner brackets or gussets can be used to reinforce or completely replace the Universal or Standard profile connector, make sure to choos the kit appropriate for your slot type H, F or E. These parts could also be used to mount additional parts and hardware.

Assembly hints

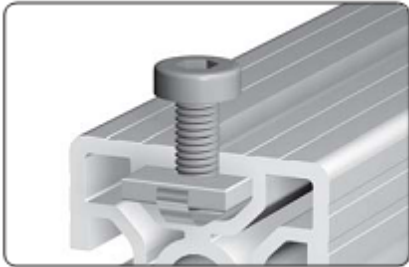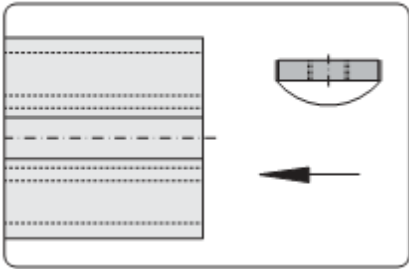PNL_FASTEN	1.31.HM5	Threaded plate H, M5	
 Fixed into position with leaf spring  Assembly Insert from end			These plates must be inserted from the open side of the profile, prior to final frame assembly