


DWG. NO.
LHDA0020400B




PROPRIETARY ITEM

ALT.	DATE	BY	DESCRIPTION
A	02-09-01	TLC	INITIAL RELEASE

This document contains proprietary information and is submitted upon the express condition that the information contained herein will not be used directly or indirectly in any way detrimental to the interests of the Lee Company, and/or in violation of regulation DAR 7-104.9 (a) (1 July 1974), et seq.



ACTUAL SIZE

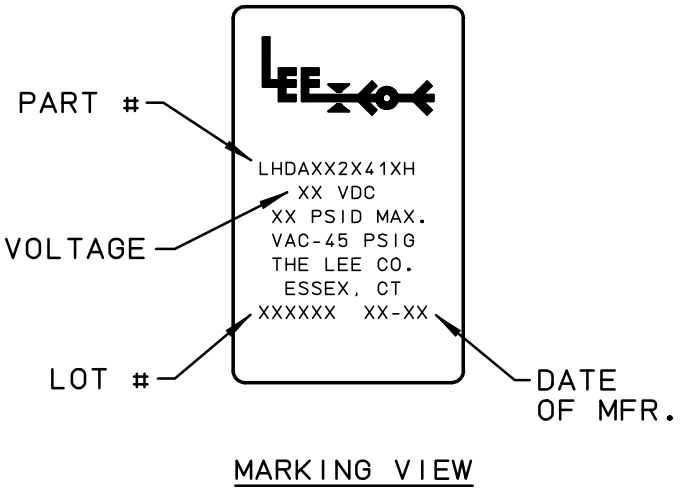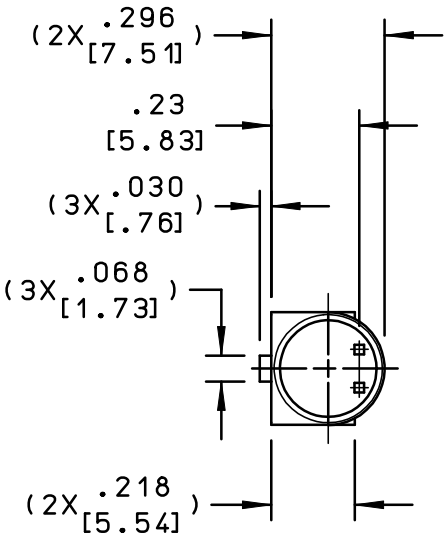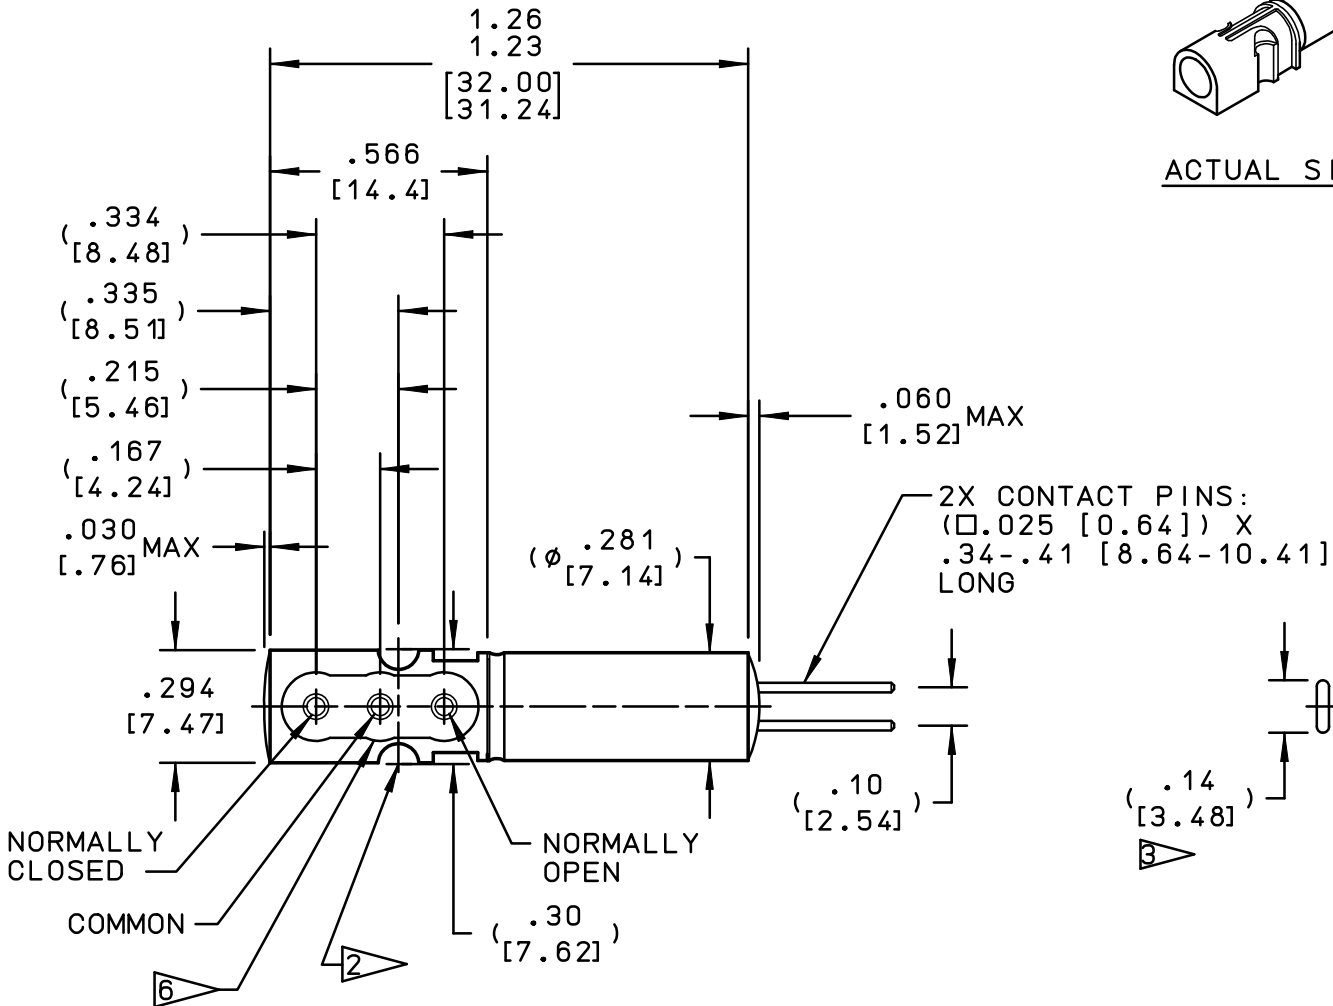

- FOR MATING BOSS, SEE LEE CO. DWG. LFIX1001150A.
OPERATING RANGE: VAC-45 PSIG [VAC-310 kPag]; 0-30 PSID [0-207 kPag].
OPERATING RANGE: VAC-45 PSIG [VAC-310 kPag]; 0-15 PSID [0-103 kPag].
GASKET (VITON) INCLUDED FOR SURFACE MOUNT PORT SEAL (LEE P/N LHWX0218010A).
USE 2X #2 SOCKET HEAD CAP SCREWS (.140 [3.56] HEAD DIAMETER MAX).
RECOMMENDED MOUNTING SCREW TORQUE:
8-12 IN-OZ [.06-.09 N-m].
1. WETTED MATERIALS: PPA, PBT, 316 SS, FeCr ALLOY, FCR & EPOXY.

NOTES:


NOTES AND DIMENSIONS SHOWN HEREON ARE FOR INSPECTION IDENTIFICATION ONLY. ALL MANUFACTURING RIGHTS ARE RESERVED.

REF. NO.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES [mm]
TOLERANCES:
.XX ±.015 [0.38]
.XXX ±.005 [0.13]
ANGLES ±2°
INT CORNER R .01 [0.25] MAX

SURFACE FINISH 63
DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION



DRAWN	TLC	02-09-01
CHK'D	TOM	02-09-01
APP'D	EBJ	03-12-01

MAT. SEE NOTE 1

H.T.

FINISH

PART NUMBER MATRIX

OPERATING PRESSURE / POWER

OPERATING VOLTAGE	15 PSID 550 mW		REV	LOHM RATE	30 PSID 750 mW		REV	LOHM RATE
5 VDC	LHDA0521411H		A	1100	LHDA0523412H		A	1200
12 VDC	LHDA1221411H		A	1100	LHDA1223411H		A	1100
24 VDC	LHDA2421411H		A	1100	LHDA2423411H		A	1100

TITLE HDI-FMT-VITON-SALINE-MASTER

THE LEE COMPANY
ESSEX, CT

SIZE	CODE IDENT. NO.	DWG. NO.	REV.
B	ONZR4	LHDA0020400B	A

SCALE: 2/1

SHEET 1 OF 1