


Raspberry Pi 3

J8
GPIO Expansion




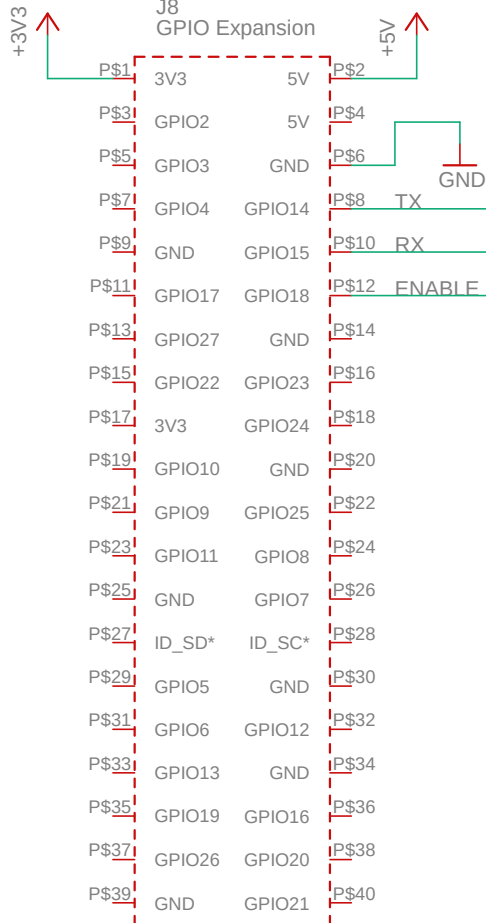


*ID_SD and ID_SC PINS:

These pins are reserved for ID EEPROM

At boot time this I2C interface will be interrogated to look for an EEPROM that identifies the attached board and allows automatic setup of the GPIOs (and optionally, Linux drivers).

DO NOT USE these pins for anything other than attaching an I2C ID EEPROM. Leave unconnected if ID EEPROM not required.

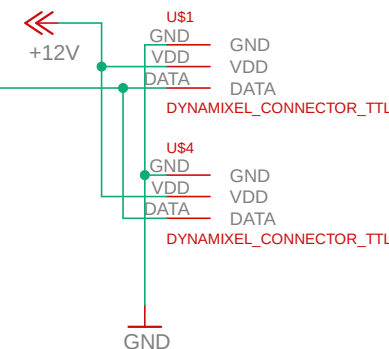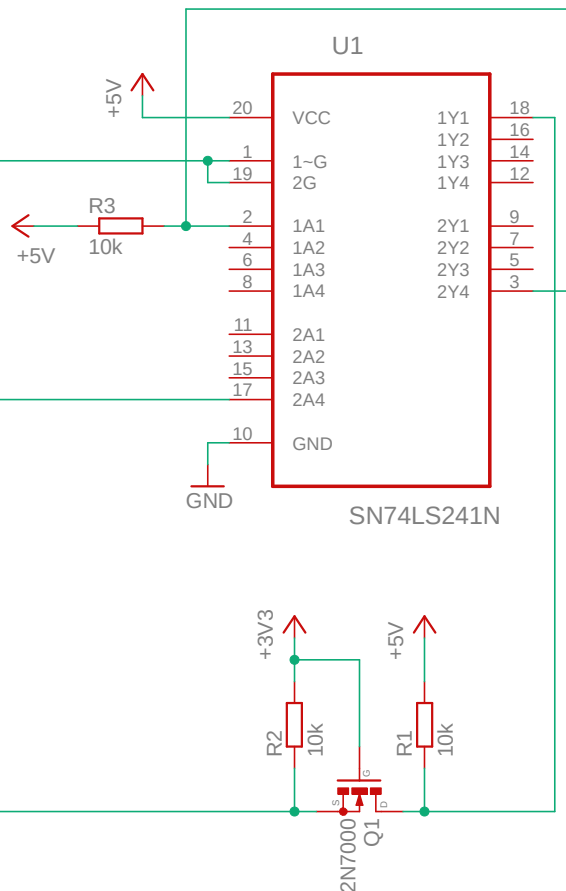

Servo print test

not saved!

Sheet: 1/1