


WATERPROOFING

ArmorFlex

PREMIUM ELASTOMERIC PROTECTIVE COATING

Advanced fiber reinforced elastomeric waterproofing membrane.

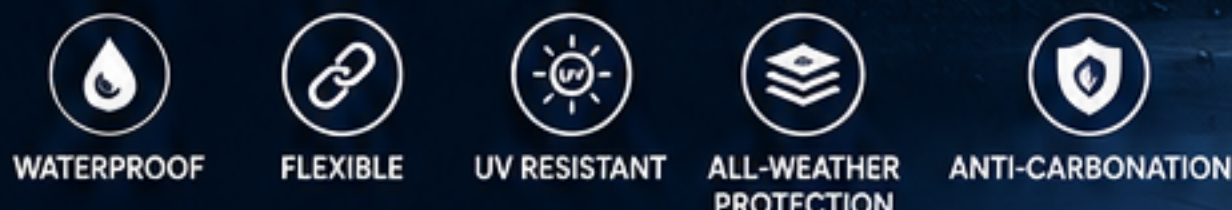

WATER BASED



LEAD FREE GUARANTEE



UV RESISTANT

*All COLORSOME® products contain no added Lead, Mercury, Arsenic or Chromium.

1. AREAS OF APPLICATION



Ideal for roofs, terraces, parapet walls, sunshades and other exposed exterior surfaces.

2. FEATURES AND BENEFITS

- ✓ Seamless, fiber reinforced elastomeric membrane
- ✓ Ultimate waterproofing up to 9 bars positive pressure
- ✓ Excellent crack bridging and abrasion resistance
- ✓ Anti-carbonation for superior structural protection
- ✓ Reduces surface temperature up to 10°C
- ✓ Applicable on high moisture surfaces (up to 70%)
- ✓ Strong adhesion to masonry substrates
- ✓ Excellent efflorescence resistance
- ✓ Warranty: up to 12 years

3. PRODUCT DETAILS

CHEMICAL PARAMETERS:

Ready to use viscous liquid, reinforced synthetic fibers.

PHYSICAL PARAMETERS:

- Colour and appearance: White (viscous paste)
- Packaging: 20 L
- Shelf life: 2 years
- Coverage: 1.5 – 2.0 kg per sq. m in two coats for 1mm DFT

PHYSICAL PARAMETERS:

PARAMETER	TEST STANDARD USED	TYPICAL VALUES
Adhesion Strength	ASTM D 4541	Minimum 1.5 MPa
Tensile Strength (14 days)	ASTM D 2370/98	1.5 ± 0.15 MPa
% Elongation (14 days)	ASTM D 2370/98	380 ± 10% (Horizontal)
Crack Bridging Ability	AS/NZ 4548	3.5 ± 0.35 mm (Horizontal)
Water Vapour Permeability	EN ISO 7783	4.1 g/m ² /day
% Solids	ASTM C 1250	54 - 60% @ 120°C/1 hr
Weight per Liter	IS 101	1.19 - 1.32 @ 30°C

4. APPLICATION METHOD



SURFACE PREPARATION

1. Surface must be clean, dry and free from dust, oil, grease or loose particles.
2. New concrete must be cured for at least 28 days and have a moisture content of less than 5 – 10%.
3. Remove any flaking paint, chalk, laitance or other weak materials.
4. Repair cracks and level uneven areas with epoxy mortar.



PRIMING & REPAIR

1. Apply Wall Primer as per recommended coverage of 80 – 100 g/m² on vertical walls and terraces.
2. Treat and repair all cracks.
3. Use a suitable Crack Sealant for cracks.
4. Fill larger cracks with modified cement mortar.



APPLICATION (HORIZONTAL)

1. Self-prime with a water-diluted first coat.
2. Apply two undiluted waterproofing coats.
3. Apply at recommended interval between coats.

5. SAFETY FEATURES & PRECAUTIONS



Refer to the MSDS for detailed information.



Wear eye protection, wash skin on contact, vapour or spray, your protection.



Store upright in a cool, dry place away from direct sunlight.



Keep out of reach of children and away from foodstuffs.



If swallowed, seek medical advice immediately.



Do not breathe vapour or spray. Use nose pad during sanding.



Do not pour paint down drains, contain spills with sand or earth.



No added Lead, Mercury or Arsenic or Chromium.

STORAGE PRECAUTIONS

- Store at a cool and dry place at ambient temperatures.
- Keep container tightly closed when not in use.
- Protect from direct sunlight and extreme heat.
- Shelf life: 12 months from date of manufacture.

RECOMMENDED FOR

- ✓ Building Roofs
- ✓ Terraces
- ✓ Parapet Walls
- ✓ Sunshades
- ✓ Exterior Vertical Walls
- ✓ IPS
- ✓ Brick- bat coba

HOW TO USE

1. **Preparation & Soundness**
Clean the surface and remove dust and loose particles.
2. **Apply Primer**
Apply 1 coat of Wall Primer evenly.
3. **Apply Coating**
Apply 2 coats of product evenly.
4. **Allow to Dry**
Let it dry for 4 – 6 hours before applying top coat.

