

CRUX SUPRA

Fine Finish Wall Putty

PREMIUM SMOOTH FINISH FOR FLAWLESS WALLS


CRUX SUPRA Fine Finish Wall Putty provides an ultra-smooth base for premium paints, ensuring perfect wall finishing with superior adhesion and long-lasting performance.

- SMOOTH FINISH**
Delivers mirror-like smooth surfaces.
- EXCELLENT ADHESION**
Strong bonding with cement & plaster surfaces.
- CRACK RESISTANT**
Minimizes shrinkage cracks for durable results.
- EASY APPLICATION**
Easy to mix and apply for faster coverage.



LEAD FREE
No added Lead, Mercury, Arsenic or Chromium.

AVAILABLE PACK SIZES

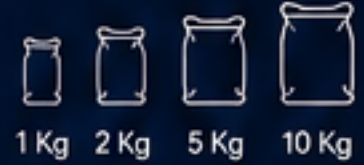

1. WHY CHOOSE CRUX SUPRA?

- Ultra Fine Finish**
Creates an even, smooth surface for a superior paint finish.
- Stronger Surface**
Enhances surface strength and durability for long-lasting walls.
- Better Paint Performance**
Improves paint coverage and brings out true color.
- Anti-Algal Protection**
Resists fungal growth and keeps walls clean and healthy.

2. IDEAL FOR

- Interior Walls**
Living rooms, bedrooms, kitchens, corridors.
- Exterior Walls**
Building exteriors, boundary walls, facades.
- Commercial Spaces**
Offices, hotels, schools, hospitals, retail outlets.
- Residential Projects**
Apartments, villas, independent houses.

3. PRODUCT DETAILS

CHEMICAL PARAMETERS

- Type : Cement Based Putty
- Base : White Cement & Polymer
- Appearance : Fine White Powder
- pH : 10 – 11
- Shelf Life : 12 months
- Packaging : Available in 1 Kg, 2 Kg, 5 Kg, 10 Kg & 25 Kg

TYPICAL PERFORMANCE PROPERTIES

Property	Typical Value
Color	White
Bulk Density	0.90 – 1.10 g/cc
Water Demand	28 – 32%
Coverage	1.2 – 1.5 m ² /kg (for 2 coats)
Drying Time	2 – 3 hours
Recoat Time	4 – 6 hours
Compressive Strength	≥ 3.0 N/mm ²
Bond Strength	≥ 1.0 N/mm ²

* Results may vary depending on surface condition and application.

4. APPLICATION GUIDE

- SURFACE PREPARATION**
 - Ensure the surface is clean, dry and free from dust, oil, grease, or loose particles.
 - Remove any flaking paint, weak plaster or laitance.
 - Repair cracks and uneven areas.
 - Allow the surface to dry completely before application.
- PREPARATION OF PUTTY**
 - Mix 1 part of Crux Supra Putty with 2 parts of clean water (approx.).
 - Stir gradually to form a smooth, lump-free mixture.
 - Allow the mixture to rest for 5–10 minutes and remix before use.
- APPLICATION**
 - Apply the first coat using a putty blade or trowel.
 - Allow it to dry for 4–6 hours.
 - Sand lightly using emery paper (180–220 grit) to remove unevenness.
 - Apply second coat for a superfine finish.
 - Allow to dry completely before painting.

5. SAFETY FEATURES & PRECAUTIONS

- Refer to MSDS for complete safety information.
- Keep out of reach of children.
- Wear gloves and mask during application.
- In case of contact with eyes, rinse immediately with plenty of water.
- If swallowed, seek medical advice immediately.
- Ensure adequate ventilation during application and drying.
- Dispose of empty packaging in accordance with local regulations.

STORAGE PRECAUTIONS

- Store in a cool, dry place.
- Keep containers tightly closed when not in use.
- Protect from moisture and extreme weather.
- Shelf life: 12 months from date of manufacture.

RECOMMENDED FOR

- Interior & Exterior Walls
- Gypsum & Plaster Surfaces
- Cement & Concrete Surfaces
- AAC Blocks & Other Masonry Surfaces

HOW TO USE

- Clean the surface and remove dust, loose particles and contaminants.
- Apply prepared putty in thin coats.
- Sand and smooth the surface.
- Allow to dry completely before applying primer and paint.

