




INTERIOR WALL FINISHES

DanaShield

ULTRA-CLOSE SURFACE GUARD

A tough, durable, water-based paint for interior walls offering a rich satin shimmer and a unique Dana pattern finish.

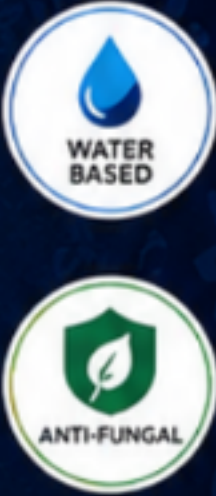

AREAS OF APPLICATION



PRIMED MASONRY



PLASTERED WALLS



CONCRETE



INTERIOR SURFACES

FEATURES AND BENEFITS

- Rich Sheen finish with distinct Dana pattern
- Enhanced durability
- Far longer lasting than regular emulsions
- Best in class washability
- Reduces toughest stains like turmeric/ink
- Water-based, low odour, less irritation
- Anti-fungal shield prevents fungal growth
- Energizes as hart growth
- Enhanced stain resistance (with Surface Protector)
- Protects walls from yellowing
- Choice of over 1750+ colours

PRODUCT DETAILS

- Shelf Life: 3 years from date of manufacture in original tightly closed containers
- Water-based

Parameter	Test Standard Used	Typical Values
Finish	Sheen levels	Rich satin shimmer & Dana pattern
Drying time (Surface dry)	IS101/1987 Part 1, Sec 6	30 min
Recoating Period	IS101/1987 Part 1, Sec 6	6–8 hrs (for Dana pattern) / 4 hrs (for smooth finish)
VOC Content	IS101/1987 Part 1, Sec 6	Lower than solvent based Lustre
Stability of thinned paint	IS101/1987 Part 1, Sec 6	To be used within 24 hours

APPLICATION METHOD

SURFACE PREPARATION

Allow new masonry to cure for 28 days.

Remove loose paint, dust, grease, fungus, algae, or moss. Use Wall Primer/Exterior Sealer for chalky surfaces.

Use DampBlock for excessive dampness.

Fill dents/holes with Acrylic Wall Putty or white cement/fine sand.

PRIMING

Apply one coat of approved Wall Primer (Water Based) and allow it to dry for 4–6 hours.

APPLICATION

FOR DANA PATTERN:
Mix Water (Primer (ST) and Enamel White (1:1), apply with brush (6–8 hrs dry). Sand lightly. Apply Royale Lustre (Option 1: Direct over putty. Option 2: Over undercoat) with Brush/Roller.

FOR SMOOTH FINISH:
Apply one coat Wall Primer (6–8 hrs dry). Sand lightly. Apply Royale Lustre (Option 1: Direct over putty. Option 2: Over primer) with Brush/Roller. Thin with water for specific application viscosity (22–30 sec or 33–40 sec depending on roller type).

SAFETY FEATURES & PRECAUTIONS

- Store in cool, dry place, lid tightly closed, upright.
- Keep out of reach of children, away from eatables.
- Harmful if swallowed; seek medical attention if ingested.
- Wear eye protection; rinse immediately with water if contact with eyes.
- Wash skin with soap/water after contact.
- Do not breathe vapour/spray; wear nose pad during sanding/surface preparation.
- Do not apply if temp < 10°C or > 40°C or if wall is damp.
- Do not over-thin or over-extend brush.
- Tint using machine colourants only.
- Do not stir/strain well before use; shake tinted paints thoroughly.
- Do not pour leftover paint down drain; contain spills with sand/earth.
- Dispose of contents/container in accordance with local regulations.

STORAGE PRECAUTIONS

Store in a cool, dry place away from direct sunlight and excessive heat. Keep container tightly closed.

RECOMMENDED FOR

Interior surfaces

