


WATERPROOFING FIBRA GUARD

Fiber Reinforced Elastomeric
Liquid Waterproofing Membrane



1. AREAS OF APPLICATION

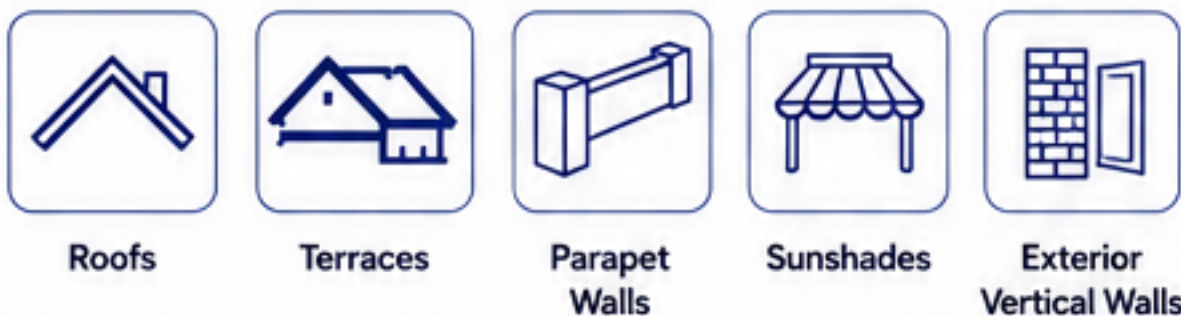

Ideal for roofs, terraces, parapet walls, sunshades, exterior vertical walls and other exposed surfaces.

2. FEATURES & BENEFITS

- ✓ Protects against 7 bars hydrostatic pressure
- ✓ Seamless, thick, and durable membrane
- ✓ Reinforced with fibers for abrasion resistance
- ✓ Unmatched crack bridging ability
- ✓ High Solar Reflectance – up to 10°C temperature reduction
- ✓ Prevents rebar corrosion with excellent CO2 diffusion resistance
- ✓ Strong adhesion to masonry substrates

3. PRODUCT DETAILS

CHEMICAL PARAMETERS:

- Select elastomeric and resilient acrylic polymers
- Reinforcing synthetic fibers

PHYSICAL PARAMETERS:

PARAMETER	TEST STANDARD USED	TYPICAL VALUE
Pull off Adhesion strength	ASTM D 4541	Minimum 1.5 MPa
Tensile strength (14 days)	ASTM D 2370/98	1.5±0.15 MPa (Horizontal) / 1.8±0.18 MPa (Vertical)
% Elongation (14 days)	ASTM D 2370/98	380±10% (Horizontal) / 220±10% (Vertical)
Crack Bridging Ability (14 days)	AS/NZ 4548	3.5±0.35 mm (Horizontal) / 1.25±0.125 mm (Vertical)
Water vapour permeability	EN ISO 7783	4.1 g/m ² /day
% Solids	ASTM C 1250	54–60%
Overcoating time interval	-	4–6 hrs @ 30°C
Weight per liter/Specific Gravity	IS 101	1.19–1.32 @ 30°C
Temperature reduction	In-house method	Up to 10°C
Form	-	Ready-to-use viscous liquid
Mix Density	-	1.26
Application Temperature	-	5°C to 35°C
Shelf life	-	5 years

4. APPLICATION METHOD



SURFACE PREPARATION

- Clean the aircoat water usand cleaning clean and waterproof steps.
- Slope requirement should dain practice for a horizontal application.
- Crack filling or scoter filine with crack soared mortal.
- Crack filling or sun prescure.
- Water and unlancing or store in the ssore or huliar acsistance.



APPLICATION PROCESS

Self-priming and coat dilution steps apply self a ranit for veritontal application:

- Apply 1 coat of generic primer
- Apply 1 coat of generic primer
- Apply 1 coat of generic topcoat for vertical surfaces

Recoating time: 20 hours per reconiend dumun.

Specialized severe dampness instruction – exactly using the factually available horizontal and vertical application details, rewritten as generic steps, e.g. e primer: 1 coat and vertical application details.



TIPS

- Ensure consistent thickness for best performance.
- Stir well before application.
- Do not apply on wet surface or if rain is expected.
- Use immediately after opening.

5. SAFETY FEATURES & PRECAUTIONS



Store container tightly closed in cool, dry place



May be harmful if swallowed



Wear eye protection and handle skin contact



Do not breathe vapour; wear nose pad for sanding



No added Lead, Mercury, or Chromium



Proper disposal; do not pour into water courses

PACK SIZES



COLOURS



RECOMMENDED FOR

- ✓ Roof Waterproofing
- ✓ External Wall Protection
- ✓ Damp prone areas
- ✓ Before Top Cost Application

