

GRAPHEX

ADVANCED GRAPHITE-ENHANCED COATING

ENGINEERED FOR EXTREME PERFORMANCE.
BUILT FOR LASTING PROTECTION.

Experience superior exterior protection with Graphex, the high-performance paint system powered by advanced graphene technology.

Engineered with pure acrylics and nanotechnology, Graphex creates a unique cross-linked barrier for unmatched durability. This premium system effectively shields your exterior walls against dampness, unsightly cracks, and algae growth.




- GRAPHENE-POWERED LAMINATION**
Strong molecular layer for superior protection
- ADVANCED NANOTECHNOLOGY FORMULA**
Enhances durability and long-lasting results
- SUPERIOR SURFACE CROSS-LINKING**
Creates a robust barrier against wear and tear
- ANTI-DAMP AND ANTI-ALGAE PROTECTION**
Keeps walls clean, dry and healthy

AVAILABLE PACK SIZES



1. AREAS OF APPLICATION

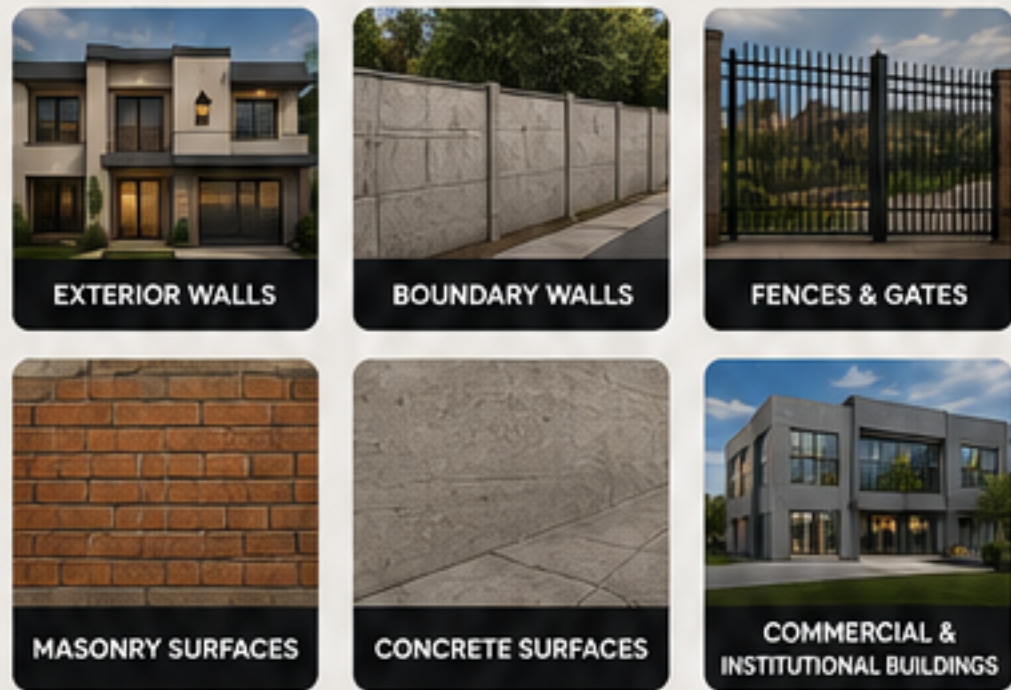

- DESIGNED FOR ALL EXTERIOR SURFACES**
Ideal for both new constructions and repainting projects.
- BUILT TO WITHSTAND EXTREMES**
Resists harsh weather, UV rays, moisture, and environmental pollutants.

2. FEATURES AND BENEFITS

- GRAPHENE-POWERED LAMINATION**
Advanced graphene technology creates a strong lamination layer for superior protection and performance.
- ADVANCED NANOTECHNOLOGY FORMULA**
Pure acrylics with nanotechnology deliver enhanced durability and long-lasting results.
- SUPERIOR SURFACE CROSS-LINKING**
Forms a robust cross-linked barrier that resists wear, tear, and harsh environmental conditions.
- ANTI-DAMP AND ANTI-ALGAE PROTECTION**
Effectively prevents dampness penetration and inhibits algae growth, keeping walls clean and healthy.
- EXTREME DURABILITY**
Engineered for extreme performance to withstand severe weather conditions and extend the life of your exterior walls.
- SUPERIOR FINISHABILITY**
Delivers a smooth, premium finish with excellent coverage and lasting beauty.

3. PRODUCT DETAILS

- Type** : Exterior Paint System
- Finish** : Premium
- Colour** : As per Shade Card
- Packaging** : 1 L, 4 L, 10 L, 20 L
- Shelf Life** : 3 years from date of manufacture
- Application** : Exterior wall surfaces

4. TECHNICAL SPECIFICATIONS

PARAMETER	TEST STANDARD / METHOD	TYPICAL VALUE
Appearance	Visual	Smooth, Premium Finish
Drying Time (Touch Dry)	ASTM D 1640	30 – 60 mins
Recoat Time	ASTM D 1640	4 – 60 hours
Elongation	Internal Method	> 150% (Excellent)
Water Resistance	Internal Method	Excellent
Damp Resistance	Internal Method	Excellent
Algal Resistance	Internal Method	Excellent
UV Resistance	Internal Method	Excellent
Coverage*	Internal Method	10 – 12 sq m/L/coat
Application Method	-	Brush, Roller, Spray
VOC Content	ISO 11890-1	Low (IGBC Compliant)

*Coverage may vary depending on surface texture, porosity, and application method.

5. HOW TO APPLY

- 1 PREPARE SURFACE**
Ensure the exterior wall is clean, dry, and free from dust, grease, oil, loose paint flakes or any other contaminants.
For best results, sand the surface smooth and wipe clean.
- 2 APPLY PRIMER**
Apply a compatible primer coat to create a uniform foundation for the premium Graphex finish.
Allow it to dry completely.
- 3 APPLY TOPCOAT**
Apply two coats of Graphex paint, allowing sufficient drying time between layers for a durable, high-performance finish.

PROFESSIONAL TIP For enhanced durability and finish, apply in thin, even coats and allow sufficient drying time between coats.

6. SAFETY FEATURES & PRECAUTIONS

- Read the Safety Data Sheet (SDS)** carefully before use.
- Store the container** tightly closed in a cool, dry place.
- Keep out of reach** of children and away from eatables.
- Do not pour** leftover paint down the drain or in water bodies.
- Wear eye protection** during application. In case of contact, rinse with plenty of water.
- No added lead, spills,** contain spillage using sand or earth.

7. STORAGE PRECAUTIONS

- Store in a cool and dry place at ambient temperatures.
- Protect from extreme heat, freezing, and direct sunlight.
- Keep the container tightly use.

8. RECOMMENDED FOR

- Residential Buildings
- Commercial Buildings
- Institutional Projects
- Renovation Projects

9. WHY CHOOSE GRAPHEX?

- Graphene-powered lamination technology
- Superior durability and long-lasting protection
- Resists dampness, cracks, and algae growth
- Engineered for extreme performance
- Up to 10 years of protection*

*When applied as per recommended system.

10. SCAN TO KNOW MORE

