

PREMIUM EXTERIOR EMULSION

Graphtech Ext

GRAPHENE-ENHANCED EXTERIOR PAINT

SUPERIOR ADHESION. EXTREME WEATHER DEFENSE.



GRAPHENE
ENHANCED



EXTREME
DURABILITY



WEATHER
DEFENSE



UV
RESISTANT

*All COLORSOME® products contain no added Lead, Mercury, Arsenic or Chromium.

1. AREAS OF APPLICATION



EXTERIOR
WALLS



CONCRETE
SURFACES



MASONRY



SAND-FACED
PLASTER


2. FEATURES AND BENEFITS

- ✓ Superior adhesion to varied substrates
- ✓ Extreme weather and UV defense
- ✓ Excellent crack resistance
- ✓ Dirt pick-up resistance
- ✓ Long-lasting color retention
- ✓ Easy application

3. PRODUCT DETAILS

CHEMICAL PARAMETERS:

- Water-based
- Graphene-enhanced Acrylic Emulsion

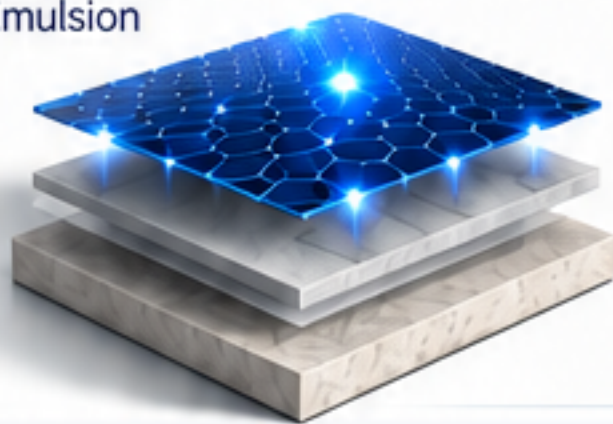

PHYSICAL PARAMETERS:

PARAMETER	TEST STANDARD USED	TYPICAL VALUES
Finish/Sheen	ASTM D 1475	Matt
Coverage	ASTM D 2370	10 – 12 m ² /L/Coat*
Weight Per Liter	–	1.30 – 1.45 kg/L
Volume Solids	–	38 – 42%
VOC Content	–	Low VOC

*Coverage may vary depending on surface texture, porosity and application method.

4. APPLICATION METHOD



SURFACE PREPARATION

Clean the surface thoroughly with sandpaper/scrapper. Ensure the surface is dry, sound, and free from dust, grease, and loose particles.



PRIMING & APPLICATION

- One coat of Wall Primer (Using a Generic Name) for exterior.
- Followed by two coats of Graphtech Ext by brush or roller, allowing 2 – 3 hours between coats.



DRYING & RECOAT

Surface dry: 30 – 60 mins
Hard dry: 4 – 6 hours
Recoating time: 2 – 3 hours
(Under normal conditions)

Note: Drying time may vary depending on weather conditions.

5. SAFETY FEATURES & PRECAUTIONS



Store in a cool,
dry place



Keep container
tightly closed
and upright



Keep out of
reach of
children



Use with
adequate
ventilation



Avoid
inhalation



Wear protective
gloves/eye
protection

6. STORAGE PRECAUTIONS



Store at ambient
temperatures and
protect from direct
sunlight.



7. HOW TO USE



- 1 Clean the surface and remove loose particles.
- 2 Apply primer.
- 3 Apply two coats of Graphtech Ext.
- 4 Allow 2 – 3 hours between coats.



SUPERIOR
ADHESION



WEATHER & UV
PROTECTION



EXCELLENT
COVERAGE



LONG LASTING
PERFORMANCE

STRONG BASE. SUPERIOR FINISH.