


PREMIUM COATINGS

Lustra Twin

ULTRA-MATTE FINISH WITH
SCRUB-RESISTANT TECHNOLOGY

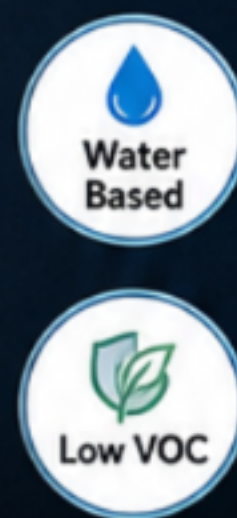

1. AREAS OF APPLICATION



Interior Walls



Ceilings



Living Areas



Bedrooms

FEATURES AND BENEFITS

- ✓ Excellent Stain Resistance & Washability
- ✓ Smooth, Ultra-Matte Look
- ✓ Low Odor & Low VOC
- ✓ Superior Hiding & Coverage
- ✓ Long-Lasting Durability
- ✓ Lead-Free Formulation
- ✓ Scrub-Resistant Technology

2. PRODUCT DETAILS

- Finish: Ultra-Matte
- Coverage: 120-140 sq. ft. / liter / coat
- Drying Time: Touch Dry: 30 mins | Recoat Time: 4-6 hrs
- Dilution Ratio: Max. 10% with water
- Shelf Life: 18 months from date of manufacture
- Dilution Ratio: Max. 10% with water
- Sheen Level: < 3% at 85° angle
- Shelf Life: 18 months from date of manufacture

Parameter	Test Standard Used	Typical Values
pH Value	IS 101	8.5 - 9.5
Solid Content	ASTM D 2369	52 ± 2%
Viscosity (at 30°C)	IS 1492 (Part 1)	110 - 120 KU
Specific Gravity	IS 101	1.35 - 1.45
Scrub Resistance	ASTM D 2486	> 5000 cycles

3. APPLICATION METHOD



SURFACE PREPARATION

Ensure surfaces are clean, dry, and free from dust, dirt, grease, and loose material. Remove existing paint, algae, or fungus by sanding or high-pressure wash. Fill cracks with appropriate wall putty.



PRIMING

Apply a coat of Water-Based Wall Primer and allow it to dry for 4-6 hours. Sand the surface lightly and dust off.



APPLICATION

Stir the paint thoroughly before use. Apply two coats of "Lustra Twin" using a roller, brush, or spray, allowing 4-6 hours drying time between coats. Do not over-thin.

4. SAFETY FEATURES & PRECAUTIONS



Ensure good ventilation during application. Avoid inhalation of vapors and spray mist.



Wear suitable protective clothing, gloves, and eye/face protection.



Keep out of reach of children and pets.



Do not apply below 10°C or above 40°C.



Do not apply when surface temperature is below 10°C or above 40°C.



In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.



Do not pour leftover paint down the drain or into watercourses. Dispose of container in accordance with local regulations.



The product does not contain added Lead, Mercury, or Chromium compounds.



5. STORAGE PRECAUTIONS

Store in a cool, dry place away from direct sunlight and heat. Keep container tightly closed.




HOW TO USE

1. Prepare Surface.
2. Apply Primer.
3. Apply First Coat.
4. Apply Second Coat.



EXCELLENT
STAIN RESISTANCE



SCRUB
RESISTANT



SUPERIOR
HIDING & COVERAGE



LOW ODOR
& LOW VOC



LONG-LASTING
DURABILITY