




INTERIOR PAINT

PUREGUARD EMULSION

A high-performance interior emulsion with advanced stain shield and matte finish.

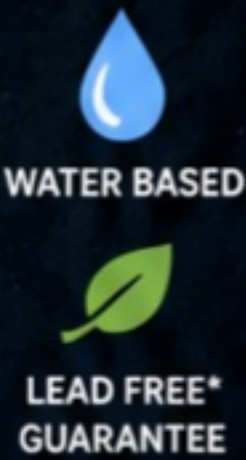

*All COLORSOME products are lead, mercury, arsenic or chromium safe.

AREAS OF APPLICATION

LIVING ROOM

BEDROOM

DINING AREA

CEILINGS

NEW WALLS

FEATURES AND BENEFITS

Excellent stain resistance

Superior washability

Smooth, matte finish

Anti-fungal and antibacterial

High coverage and opacity

Low VOC, eco-friendly formulation

Quick drying for faster re-coat

Durable, long-lasting performance

PRODUCT DETAILS

CHEMICAL PARAMETERS:

Acrylic Emulsion-based paint

PHYSICAL PARAMETERS:

PARAMETER	TEST STANDARD USED	TYPICAL VALUES
Sheen Level	ASTM D523	2-5 at 85°
Coverage	Internal Test	100-120 sq. ft./liter per coat
Surface Dry Time	Internal Test	30-60 minutes
Re-coat Time	Internal Test	4-6 hours
VOC Content	EPA Method 24	< 30 g/liter
Colour	Visual	Available in various shades

Coverage may vary depending on surface texture and application method.

APPLICATION METHOD

SURFACE PREPARATION

- Clean concrete should be cured for at least 28 days and have a moisture content of less than 5%.
- Sand and smoothen the surface; sanding should be done mechanically. Fill fine cracks with Acrylic Wall Putty.
- Fill damaged areas with cement mortar; hairline cracks should be filled using Acrylic Wall Putty.

PRIMING

- Apply one coat of Water-based Primer, followed by Acrylic Wall Putty* if required.
- Re-coat time: 1 – 2 hours.

APPLICATION

- Dilute paint with 40–50% water.
- Apply 2 coats by brush, roller, or spray as recommended.
- Re-coat time: 4 – 6 hours.

SAFETY FEATURES & PRECAUTIONS

Ensure adequate ventilation during application.

Avoid contact with eyes and skin.

Keep out of reach of children.

In case of eye contact, rinse immediately with water and seek medical advice.

Wear appropriate personal protective equipment (PPE).

Storage temperature should be between 5°C and 40°C.

Do not pour leftover paint down drains or watercourses.

In the event of spills, contain spillage using sand or earth.

Do not add lead, mercury or chromium compounds.

PACK SIZES

1L

4L

10L

20L

Available in multiple sizes for every need.

SHELF LIFE

24 months from manufacturing in original sealed containers.

RECOMMENDED FOR

Interior Walls

Ceilings

Gypsum Boards

Drywall & Plaster Surfaces

ADVANCED STAIN SHIELD

SMOOTH & MATTE FINISH

LOW VOC FORMULA

HIGH COVERAGE