



EXTERIOR WALL FINISHES

ROOFGUARD PRO

High Performance Coating for
Roof Tiles, Bricks and Baked Clay Tiles.



WATER BASED



NO ADDED LEAD,
MERCURY OR
CHROMIUM



LONG LASTING
PROTECTION

1. AREAS OF APPLICATION



ROOF TILES



KERALA
BRICKS



CLAY TILES



NON-POROUS
TILES

Ideal for a wide range of exterior surfaces for long-lasting protection and beauty.

2. FEATURES & BENEFITS

- ✓ High performance for harsh tropical conditions.
- ✓ Classy sheen finish.
- ✓ Excellent crack bridging ability.
- ✓ 5 year performance warranty.
- ✓ Lotus effect water repellency.
- ✓ Strong adhesion film.
- ✓ Prevents algal/fungal growth (Black Spot Resistance).
- ✓ Washability: High.

3. PRODUCT DETAILS

CHEMICAL PARAMETERS:

Water-based acrylic coating.

PHYSICAL PARAMETERS:

- Colour Range: 48 shades available.
- Finish: Rich Sheen.
- Shelf life: 3 years from date of manufacture.
- Packaging: 1 ltr, 4 ltr, 10 ltr, 20 ltr packs.
- Stability of thinned paint: Use within 24 hours.

PARAMETER	TEST STANDARD USED	TYPICAL VALUES
Drying Time	-	Surface dry: 30 min
Sheen Level	-	30 – 40 at 60° GH
Coverage (1 Coat)	-	9 – 11 sq.m/ltr (masonry)
Coverage (2 Coats)	-	4.5 – 5.5 sq.m/ltr (masonry)

4. APPLICATION METHOD



SURFACE PREPARATION

- Ensure 28 days cure for new plaster.
- Remove loose paint, fungus, algae, dust, and grease with wire brushing and water.
- Fill cracks up to 3mm with specialized filler.
- Fill holes/dents with wall putty or cement-sand mix (1:3).



PRIMING

- For porous/chalky surfaces, use an exterior sealer before application.
- Ensure surfaces are free of dampness/seepage.



APPLICATION

Apply by brush or spray. For best results, coat individual roof tiles on both sides before laying.

STEP	THINNER	DILUTION %	APPLICATION VISCOSITY	RECOAT PERIOD
First Coat	Water	30%	Paste form	4 - 6 HRS
Second Coat	Water	30%	Paste form	4 - 6 HRS

5. SAFETY FEATURES & PRECAUTIONS



Do not apply
below 10°C



Strain paint
before use



Refer to
MSDS



Store with lid
tightly closed.



Wear eye
protection during
application.



Do not breathe
vapor/spray.



Dispose
responsibly



Do not apply
in rainy
conditions

6. STORAGE PRECAUTIONS




Store in a cool,
dry place away
from direct
sunlight.



7. HOW TO USE

- 1 Clean surface, remove dust and loose particles.
- 2 Apply 1st coat, let dry 4-6 hours.
- 3 Apply 2nd coat, let dry for a full 24 hours before use.

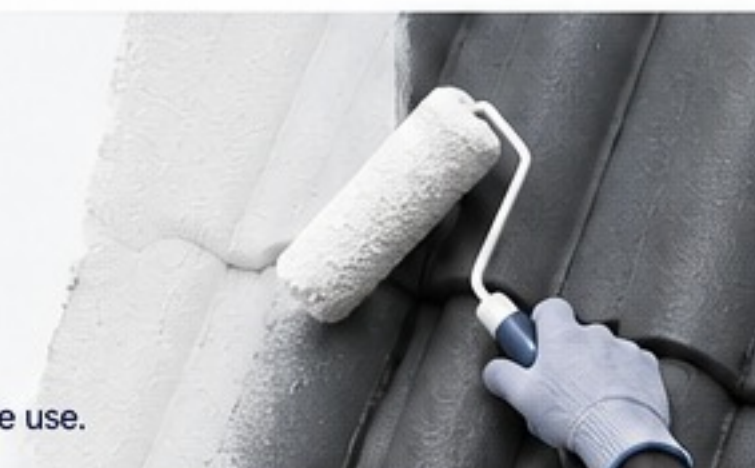

STRONG
ADHESION



ALGAE & FUNGUS
RESISTANT



UV
RESISTANT



WEATHER
PROTECTION



LONG LASTING
PERFORMANCE