

SEALBOND

ADVANCED WATERPROOFING MEMBRANE

Seals Cracks. Protects Permanently.

Sealbond is a premium polymer-modified cement compound designed for superior, high-adhesion crack filling and waterproofing.

This advanced formula effectively seals cracks up to 5mm to prevent water ingress in your masonry. Its easy-to-mix powder ensures a seamless, aesthetic finish that bonds firmly to plastered surfaces.



SUPERIOR
CRACK FILLING
UP TO 5MM



HIGH-ADHESION
CEMENT-POLYMER
BLEND




EFFECTIVE WATER
INGRESS
PREVENTION



SIMPLE
WATER-BASED
PREPARATION

1. AREAS OF APPLICATION

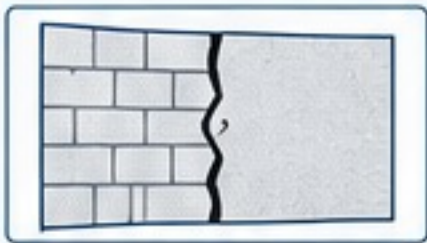

Filling cracks in
plastered surfaces
(interior & exterior)

2. FEATURES AND BENEFITS



SUPERIOR CRACK FILLING UP TO 5MM

Effectively seals and fills cracks up to 5mm width.



HIGH-ADHESION CEMENT-POLYMER BLEND

Advanced polymer-modified formula ensures strong and durable adhesion.



EFFECTIVE WATER INGRESS PREVENTION

Forms a reliable barrier that prevents water seepage and protects the structure.



SIMPLE WATER-BASED PREPARATION

Easy-to-mix powder requires only water for a smooth, workable paste.

3. PRODUCT DETAILS

DESCRIPTION:

Sealbond is a premium, polymer-modified cement compound specifically formulated for crack filling and waterproofing.

It provides exceptional adhesion to plastered surfaces and creates a water-resistant barrier that helps protect masonry from the damaging effects of water ingress.

Its easy-to-use formula ensures a smooth, aesthetic finish with long-lasting performance.

TECHNICAL SPECIFICATIONS:

PARAMETER	DETAILS
Finish	Aesthetic (smooth finish)
Application	Filling cracks in plastered surfaces
Composition	Premium cement, selected polymers & additives
Crack Filling Capacity	Up to 5mm width
Adhesion Strength	High adhesion to plastered surfaces
Water Resistance	Excellent water ingress prevention
Mixing	Water-based preparation
Pack Sizes	1 kg 2 kg 5 kg 10 kg
Shelf Life	12 months from date of manufacturing (when stored in a cool, dry place in unopened pack)
Coverage	Varies with crack size and depth (depending on surface condition)

4. APPLICATION METHOD

1



PREPARE SURFACE

Ensure the surface is clean, sound, and free from loose debris or dust.

2



MIX PRODUCT

Add clean water to the Sealbond powder and stir until a smooth, workable paste is achieved.

3



APPLY AND FINISH

Fill the cracks using a spatula or trowel and smooth the surface for an aesthetic finish.

5. SAFETY FEATURES & PRECAUTIONS



Refer to the MSDS for Sealbond for detailed safety information about safe handling, storage and disposal.



Wear appropriate gloves and protective clothing during application.



Keep out of reach of children and away from food & feed.



May be harmful if swallowed. In case of ingestion, seek immediate medical attention.



Wear eye protection. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.



Do not pour leftover material down the drain or in water courses.



In the event of spills, contain spillage using sand or earth.



No added Lead, Mercury or Chromium compounds.

6. STORAGE PRECAUTIONS



- Store in a cool, dry place at ambient temperatures.
- Keep the container tightly closed when not in use.

7. RECOMMENDED FOR



- Residential buildings
- Commercial complexes
- Renovation projects
- New construction

8. HOW TO USE

- Clean the surface and remove dust and loose particles.
- Mix Sealbond with water as per requirement.
- Apply to cracks up to 5mm.
- Smooth the surface for best finish.



SUPERIOR
CRACK FILLING
UP TO 5MM



HIGH-ADHESION
CEMENT-POLYMER BLEND



EFFECTIVE WATER
INGRESS PREVENTION



SIMPLE
WATER-BASED PREPARATION



LONG-LASTING
PERFORMANCE

Stronger
Surfaces
Brighter
Spaces