


WALL EMULSION

Velvet Shield

Ultra-Matte Wall Emulsion



AREAS OF APPLICATION

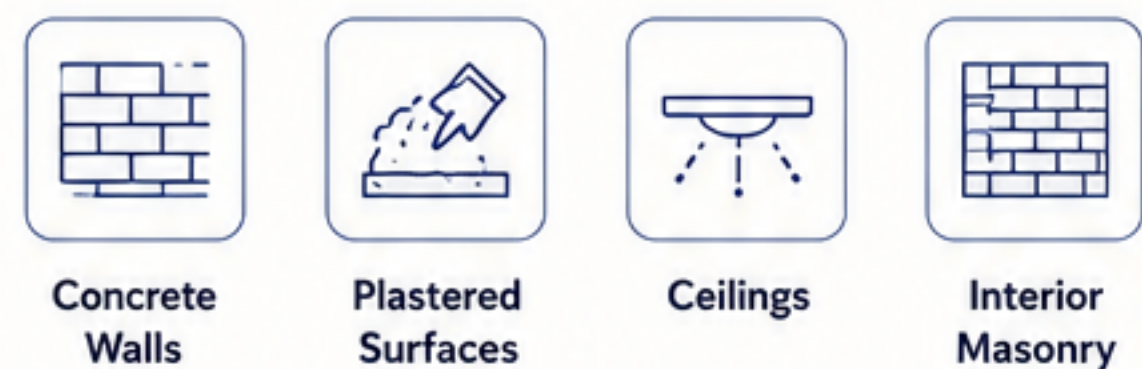

FEATURES AND BENEFITS



PRODUCT DETAILS

Chemical Parameters:


- VOC Level: Low
- Composition: Acrylic Copolymer Emulsion

Physical Parameters:


- Sheen Level (at 85°)
- Solid Content by Weight
- Specific Gravity
- Theoretical Coverage
- Recommended DFT per coat
- Drying Time (Touch Dry)
- Recoat Time (at 25°C)

Parameter	Test Standard Used	Typical Values
Sheen Level (at 85°)	ISO 2813	< 5%
Solid Content by Weight	ISO 3251	55 ± 2%
Specific Gravity	ISO 2811	1.55 ± 0.05 kg/L
Theoretical Coverage	ISO 23811	12 - 14 sq. m/L per coat
Recommended DFT per coat	ISO 2808	30 - 40 microns
Drying Time (Touch Dry)	ASTM D1640	30 minutes
Recoat Time (at 25°C)	ASTM D1640	4 - 6 hours

APPLICATION METHOD

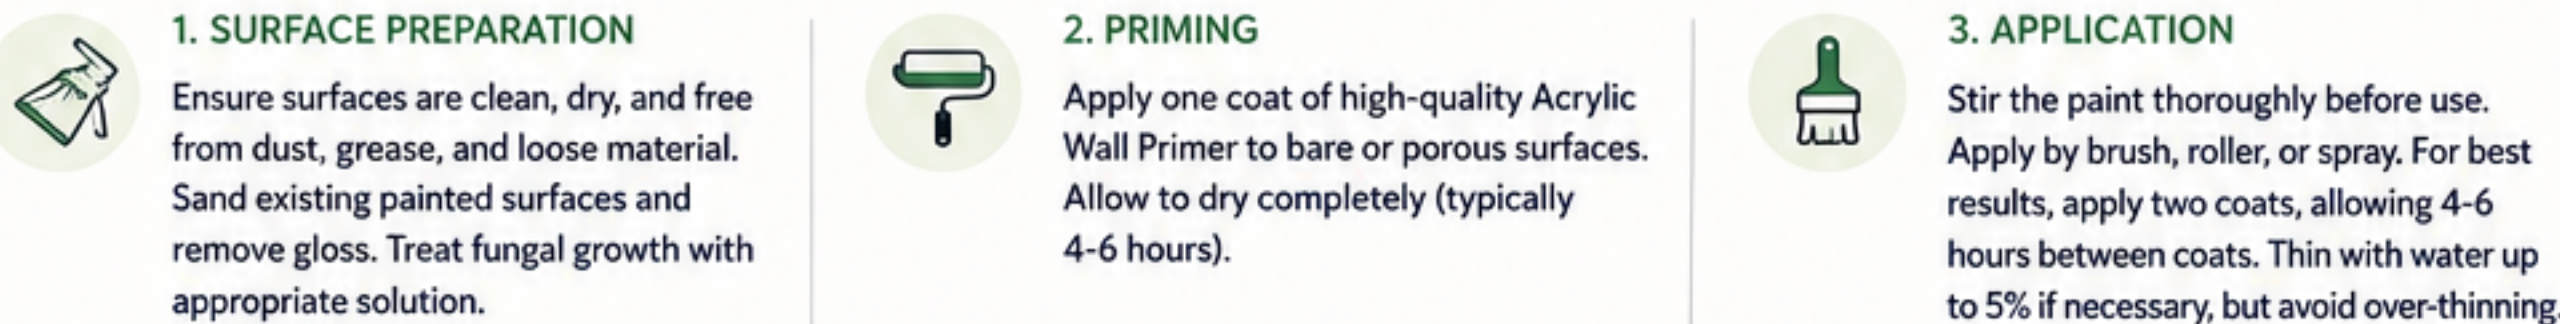

SAFETY FEATURES & PRECAUTIONS

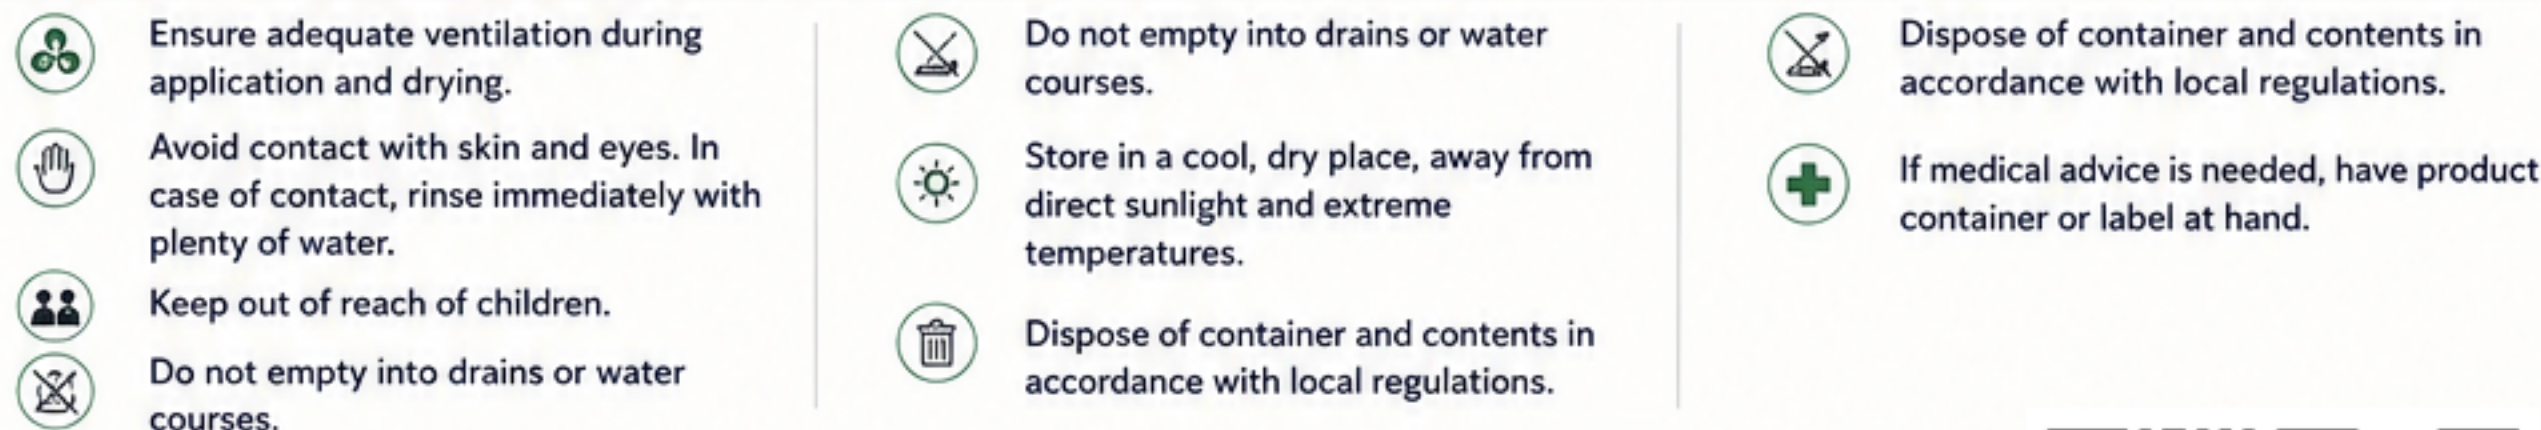

STORAGE PRECAUTIONS

Store in original, tightly closed container in a cool, ventilated area. Protect from frost and heat.

RECOMMENDED FOR

- Premium Interior Walls
- High-Traffic Residential Areas
- Hospitality and Commercial Spaces

HOW TO USE

- Prepare surface.
- Apply primer.
- Apply first coat of Velvet Shield.
- Allow 4-6 hours.
- Apply second coat.
- Full cure after 7 days.

