



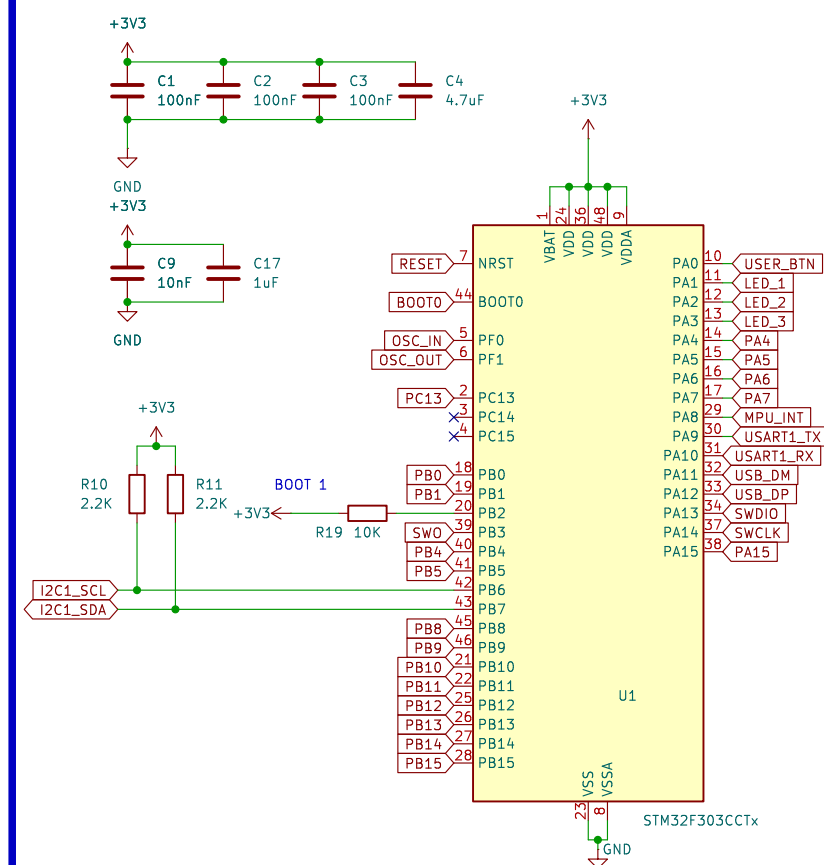


## File: LCD.kicad\_sch

File: LCD.kicad\_sch

**P1**  
**Conn\_02x05\_Odd\_Even**

| Pin | Signal |
|-----|--------|
| 1   | +3V3   |
| 2   | PC13   |
| 3   | LED_1  |
| 4   | LED_2  |
| 5   | PA1    |
| 6   | PA4    |
| 7   | PA3    |
| 8   | PA6    |
| 9   | PA5    |
| 10  | GND    |

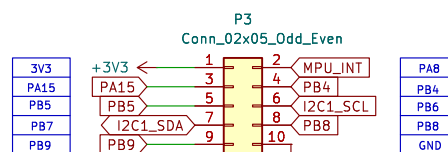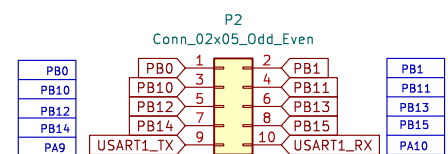

## BOOT MODES

BOOT 0  
 DEFAULT - LOW - MAIN FLASH MEMORY  
 PRESSED - HIGH - SYSTEM MEMORY

The diagram illustrates a 3-LED module circuit. It features three parallel branches connected to a +3V3 power supply and a common ground (GND). Each branch contains a resistor (R1, R2, R15, R16) and an LED (D1, D2, D3, D4). The LEDs are labeled LED\_1, LED\_2, and LED\_3. The power supply is labeled +3V3 and the ground is labeled GND. The text "POWER ON/OFF LED" is also present.




H1  
MountingHole

H2  
MountingHole

H3  
MountingHole

H4  
MountingHole


**Title:**

Size: A3

Date:


Rev:  
Id: 1/3

# HEADERPINS

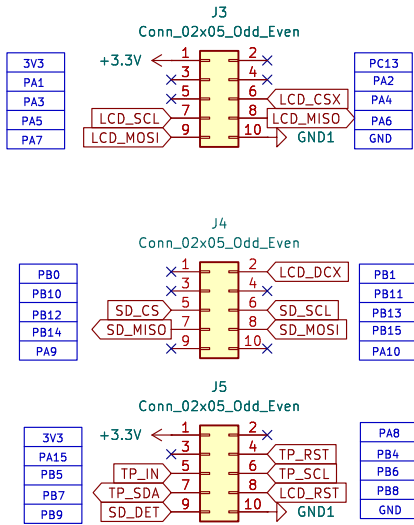

# TOUCH PANEL (CST816S)

# LCD (GC9A01)

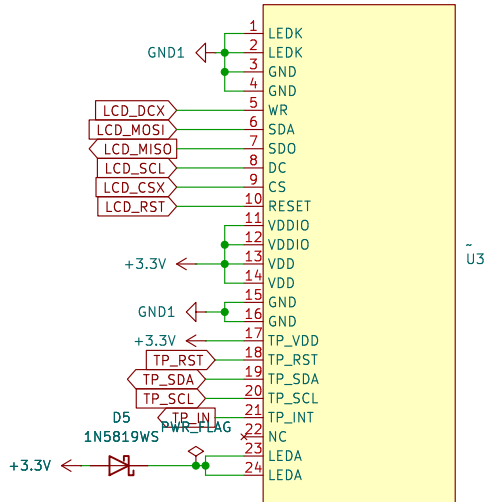

# u-SD CARD

