


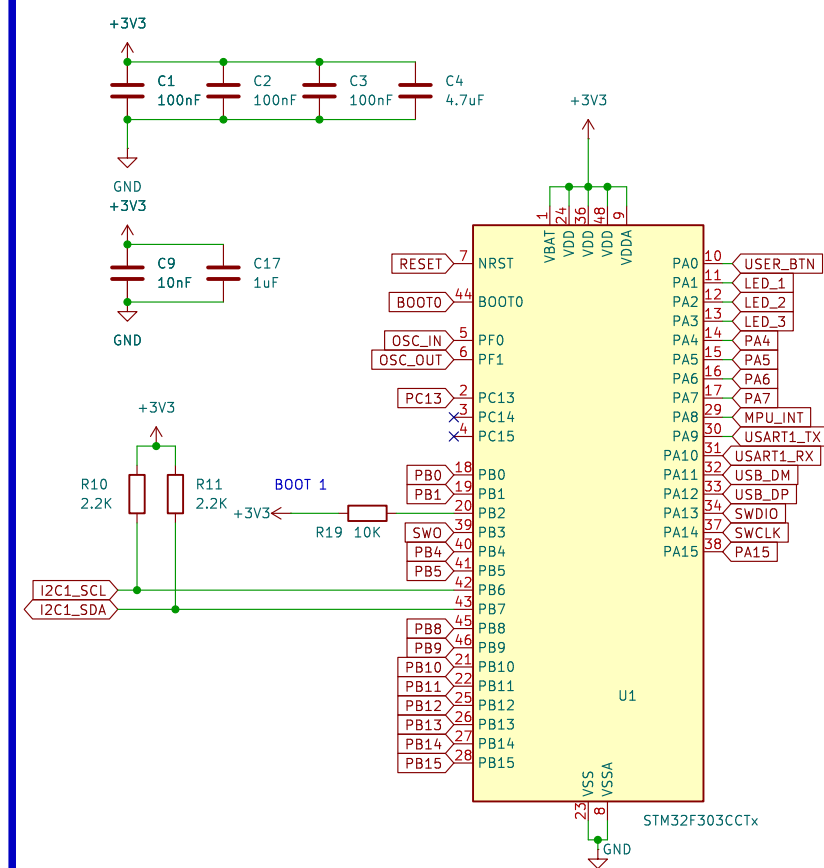

File: LCD.kicad_sch

File: LCD.kicad_sch

P1
Conn_02x05_Odd_Even

+3V3 ← 1 2 → PC13



LED_1 3 4 LED_2

LED_3 5 6 LED_4

PA5 7 8 PA6

PA7 9 10

GND

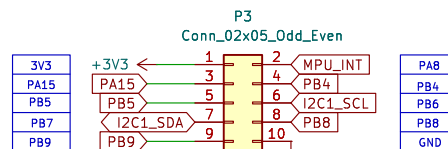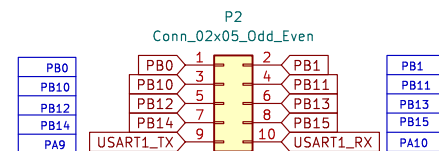

BOOT MODES

BOOT 0
 DEFAULT – LOW – MAIN FLASH MEMORY
 PRESSED – HIGH – SYSTEM MEMORY

[illegible]


The diagram illustrates a 3-LED power button circuit. It consists of three parallel branches, each containing a resistor (R1, R2, R15) and an LED (D1, D2, D3) in series. The LEDs are labeled RED, BLUE, and GREEN. The circuit is powered by +3V3 and connected to GND. The LEDs are controlled by PA1, PA2, and PA3 pins, which are labeled LED_1, LED_2, and LED_3 respectively. A label 'POWER ON/OFF LED' is present.

H1 MountingHole

H2 MountingHole

H3 MountingHole

H4 MountingHole


**Title:**

Size: A3

Date:


Rev:
Id: 1/3

HEADERPINS

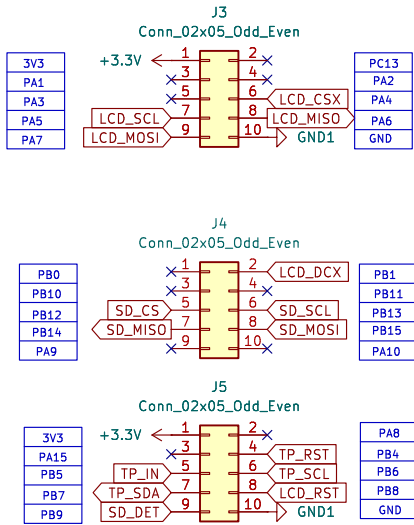

TOUCH PANEL (CST816S)

LCD (GC9A01)

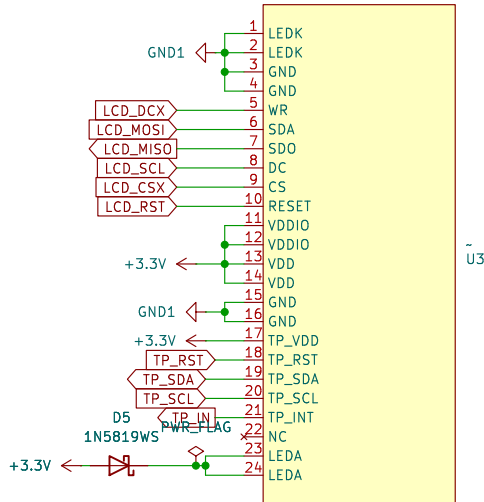

u-SD CARD

