



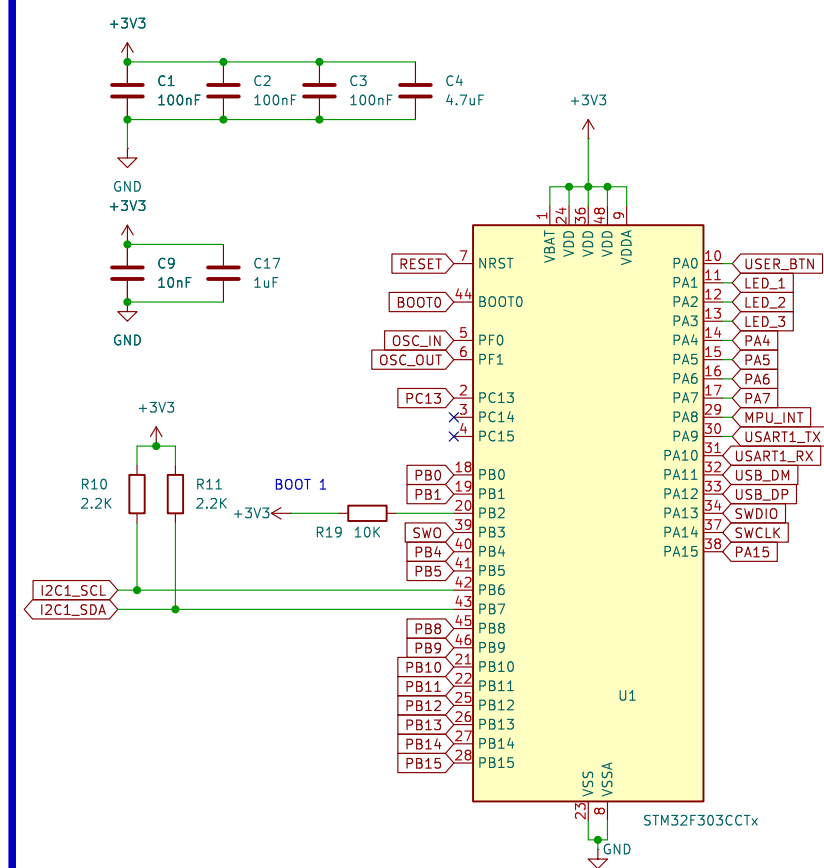


File: LCD.kicad_sch

File: LCD.kicad_sch

P1
Conn_02x05_Odd_Even

Pin	Signal
1	+3V3
2	PC13
3	LED_1
4	LED_2
5	PA3
6	PA4
7	PA5
8	PA6
9	PA7
10	GND

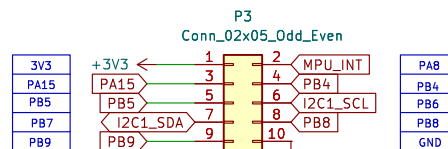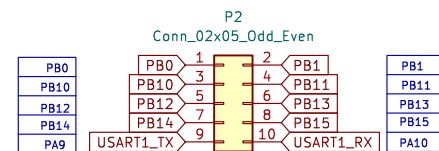

BOOT MODES

BOOT 0
 DEFAULT – LOW – MAIN FLASH MEMORY
 PRESSED – HIGH – SYSTEM MEMORY

BOOT MODES


The diagram illustrates a 3-LED power button circuit. It consists of three parallel branches, each containing a resistor (R1, R2, R15) and an LED (D1, D2, D3) in series. The LEDs are labeled RED, BLUE, and GREEN. The circuit is powered by +3V3 and connected to GND. The LEDs are controlled by signals PA1, PA2, and PA3, which are labeled LED_1, LED_2, and LED_3 respectively.

H1
MountingHole

H2
MountingHole

H3
MountingHole

H4
MountingHole




Title:

Size: A3

Date:


Rev: 1/3

HEADERPINS

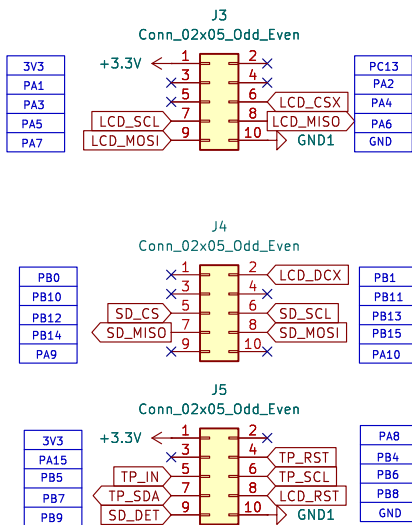


TOUCH PANEL (CST816S)

LCD (GC9A01)

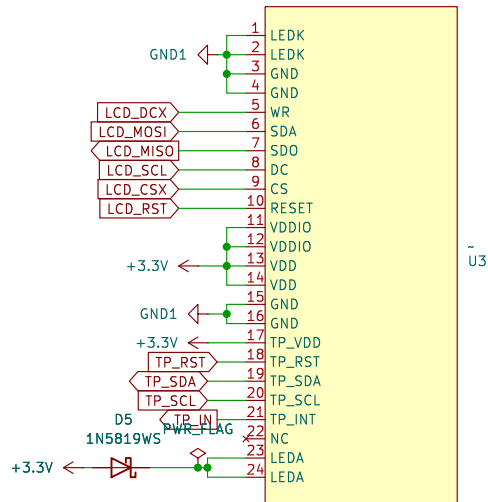

u-SD CARD

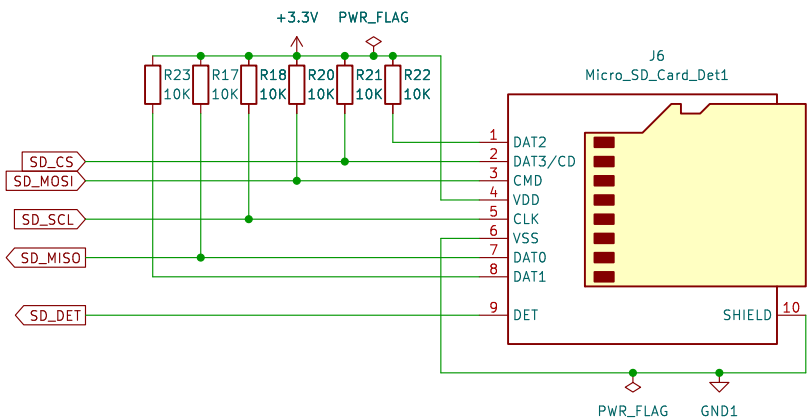

Sheet: /LCD/
File: LCD.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 2/3

