



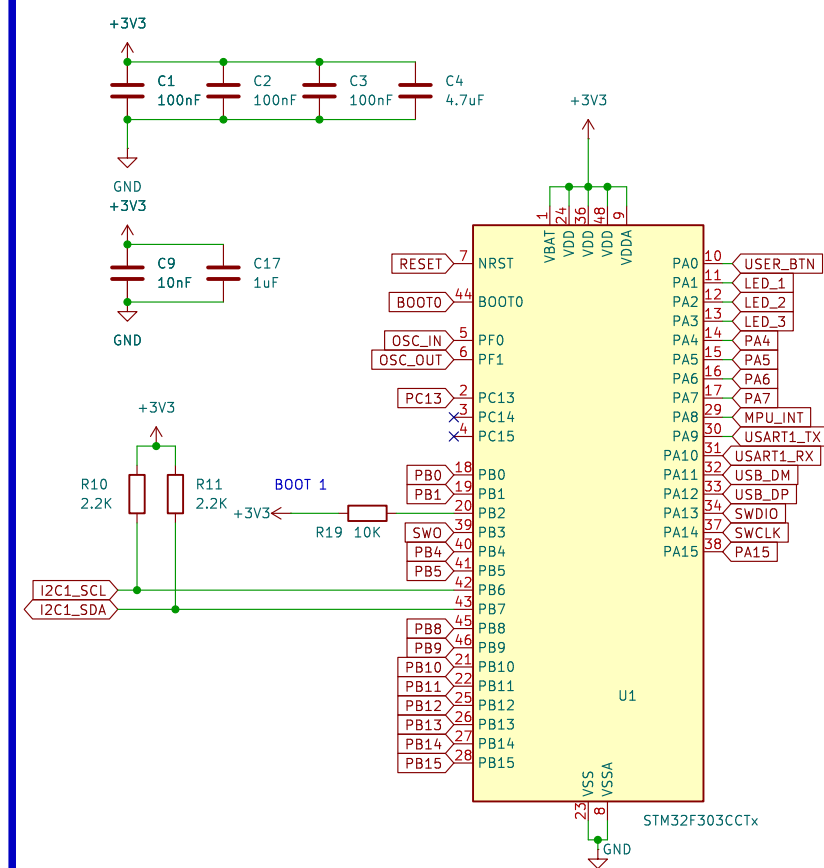


File: LCD.kicad_sch

File: LCD.kicad_sch

P1
Conn_02x05_Odd_Even

Pin	Signal
1	+3V3
2	PC13
3	LED_3
4	LED_2
5	LED_3
6	PA4
7	PA5
8	PA6
9	GND
10	GND

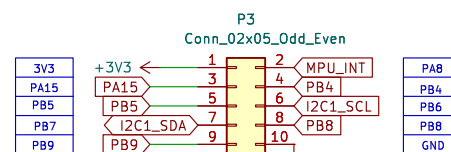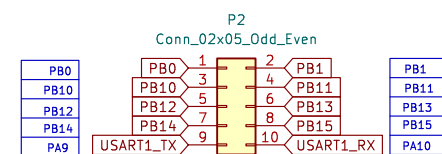

BOOT MODES

BOOT 0
 DEFAULT - LOW - MAIN FLASH MEMORY
 PRESSED - HIGH - SYSTEM MEMORY


The diagram illustrates a circuit for driving three LEDs (Red, Blue, Green) using three GPIO pins (PA1, PA2, PA3) and three current-limiting resistors (R1, R2, R15). The LEDs are connected to a common ground (GND). The circuit is powered by +3V3. The LEDs are labeled D1 (RED LED), D2 (BLUE LED), and D3 (GREEN LED). The resistors are labeled R1 (330), R2 (330), and R15 (330). The GPIO pins are labeled PA1 (LED_1), PA2 (LED_2), and PA3 (LED_3). The text "POWER ON/OFF LED" is also present.

H1 MountingHole

H2 MountingHole

H3 MountingHole

H4 MountingHole

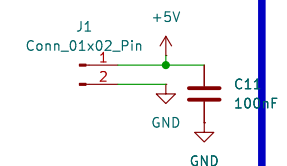
**Title:**

Size: A3

Date:


Rev:
Id: 1/3

HEADERPINS

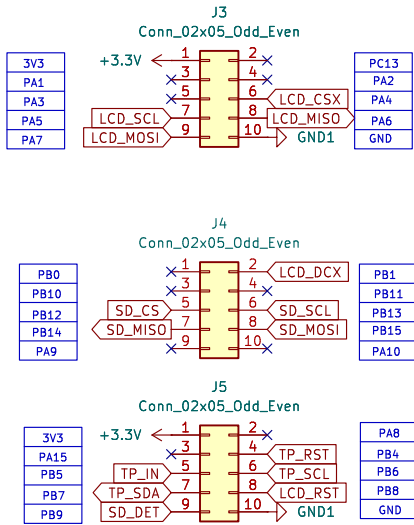

TOUCH PANEL (CST816S)

LCD (GC9A01)

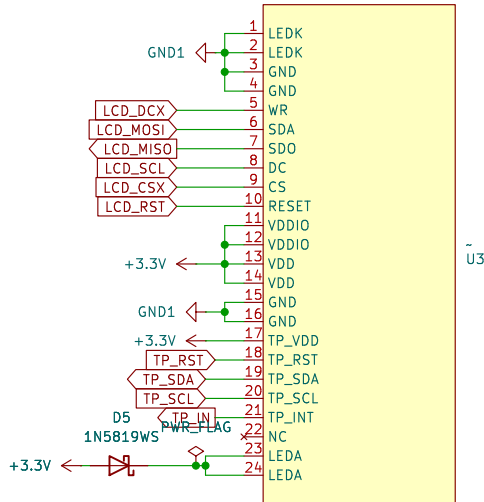

u-SD CARD

