


STM32F303CCT6 MCU

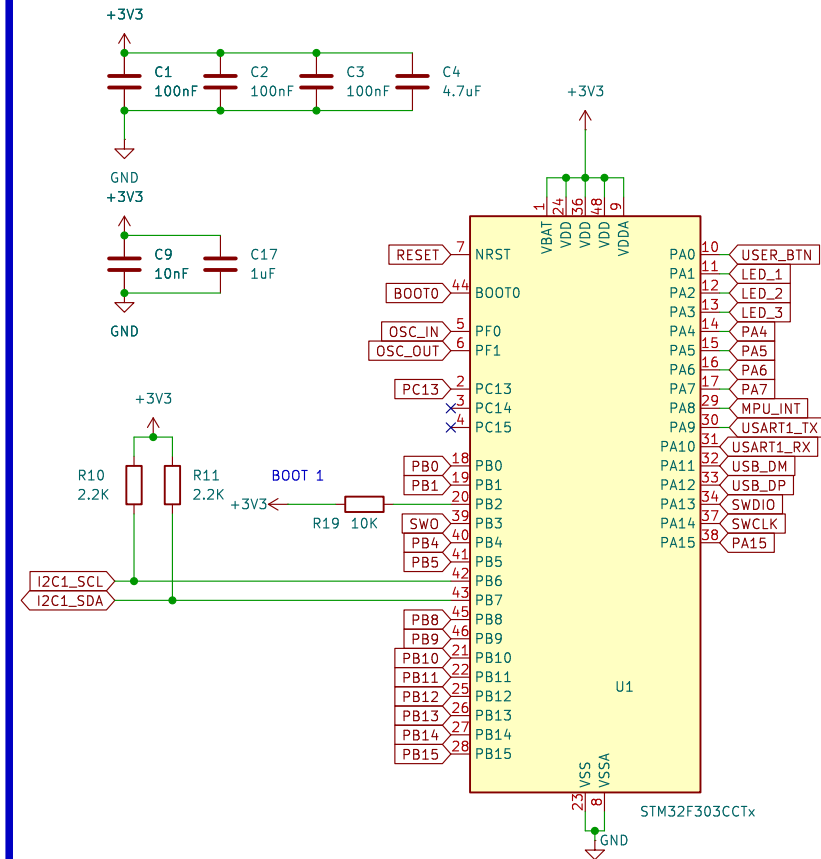



LCD

File: LCD.kicad_sch

stlinkv3


File: stlinkv3.kicad_sch

HEADER PINS

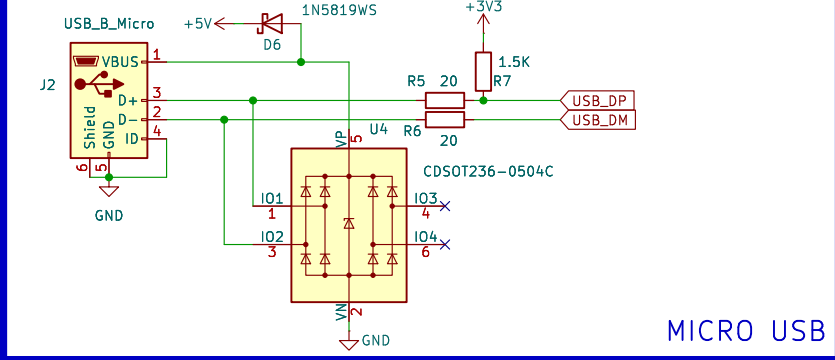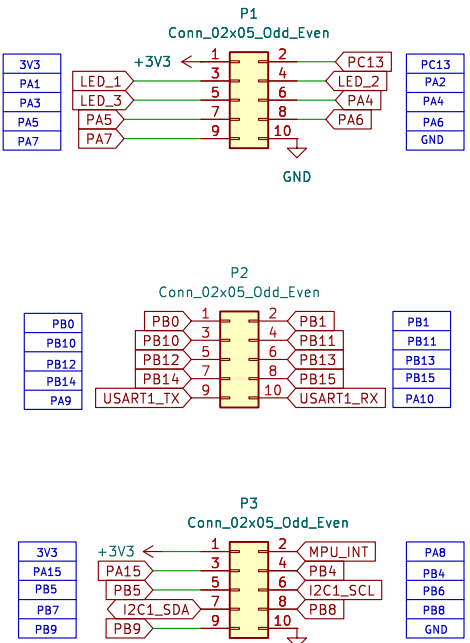


MICRO USB

MPU6050

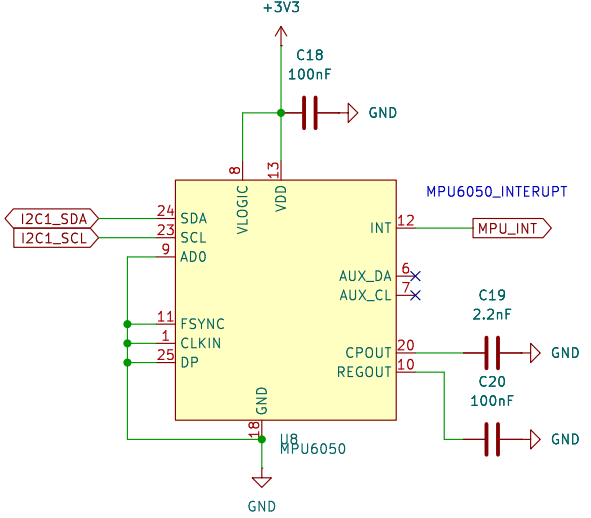


BUTTONS

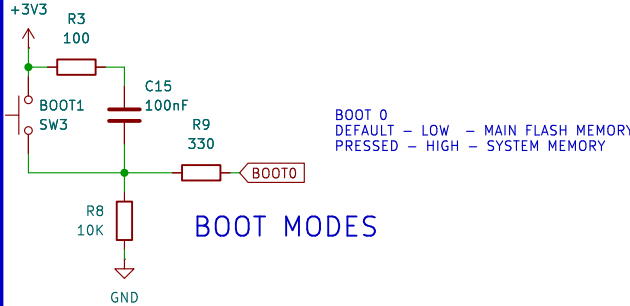


BOOT MODES


VOLTAGE REGULATOR

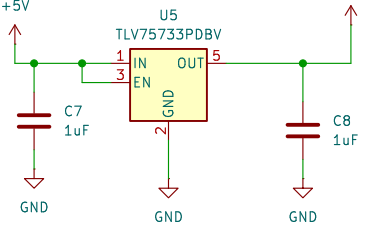



LED's

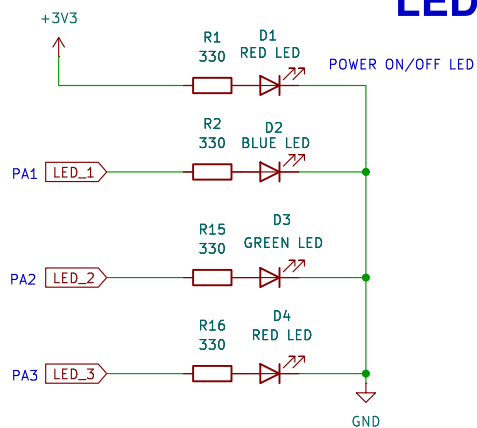

OSCILLATORS

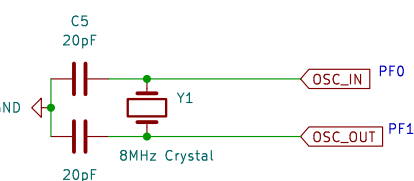

Mounting Holes

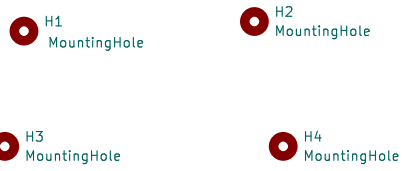

HEADERPINS

J3
Conn_02x05_Odd_Even

3V3	1	2	PC13
PA1	3	4	PA2
PA3	5	6	PA4
PA5	7	8	PA6
PA7	9	10	GND

+3.3V
LCD_SCL
LCD_MISO
LCD_CSX
GND1

J4
Conn_02x05_Odd_Even

PB0	1	2	PB1
PB10	3	4	PB11
PB12	5	6	PB13
PB14	7	8	PB15
PA9	9	10	PA10

SD_CS
SD_MISO
SD_SCL
SD_MOSI
GND1

J5
Conn_02x05_Odd_Even

3V3	1	2	PA8
PA15	3	4	PB4
PB5	5	6	PB6
PB7	7	8	PB8
PB9	9	10	GND

+3.3V
TP_IN
TP_SDA
TP_DET
GND1

TOUCH PANEL (CST816S)

LCD (GC9A01)

The diagram shows the pin connections for the LCD (GC9A01) and Touch Panel (CST816S) module. The module is represented by a yellow rectangle with pins numbered 1 to 24. The connections are as follows:

- Pin 1:** LEDK
- Pin 2:** LEDK
- Pin 3:** GND
- Pin 4:** GND
- Pin 5:** WR (LCD_DCX)
- Pin 6:** SDA (LCD_MOSI)
- Pin 7:** SDO (LCD_MISO)
- Pin 8:** DC (LCD_SCL)
- Pin 9:** CS (LCD_CSX)
- Pin 10:** RESET (LCD_RST)
- Pin 11:** VDDIO
- Pin 12:** VDDIO
- Pin 13:** VDD (+3.3V)
- Pin 14:** VDD
- Pin 15:** GND
- Pin 16:** GND
- Pin 17:** TP_VDD (+3.3V)
- Pin 18:** TP_RST (TP_RST)
- Pin 19:** TP_SDA (TP_SDA)
- Pin 20:** TP_SCL (TP_SCL)
- Pin 21:** TP_INT (TP_IN)
- Pin 22:** NC
- Pin 23:** LEDA
- Pin 24:** LEDA

Additional components and connections shown:

- GND1:** Connected to pins 3, 4, 15, and 16.
- +3.3V:** Connected to pins 13, 17, and 24.
- D5 1N5819WS:** A diode connected between the +3.3V line and pin 24.
- TP_IN:** A pull-up resistor connected between pin 21 and the +3.3V line.

u-SD CARD

The diagram illustrates the electrical connection between a microcontroller (MCU) and a u-SD CARD (J6) using a 10-pin connector. The MCU pins are labeled: SD_CS, SD_MOSI, SD_SCL, SD_MISO, and SD_DET. The u-SD CARD pins are labeled: 1 (DAT2), 2 (DAT3/CD), 3 (CMD), 4 (VDD), 5 (CLK), 6 (VSS), 7 (DAT0), 8 (DAT1), and 9 (DET). The circuit includes a +3.3V supply, a PWR_FLAG pin, and several resistors (R23, R17, R18, R20, R21, R22) connected to the MCU pins. The u-SD CARD is labeled 'Micro_SD_Card_Det1' and 'SHIELD'.

Rev:
Id: 2/3

