



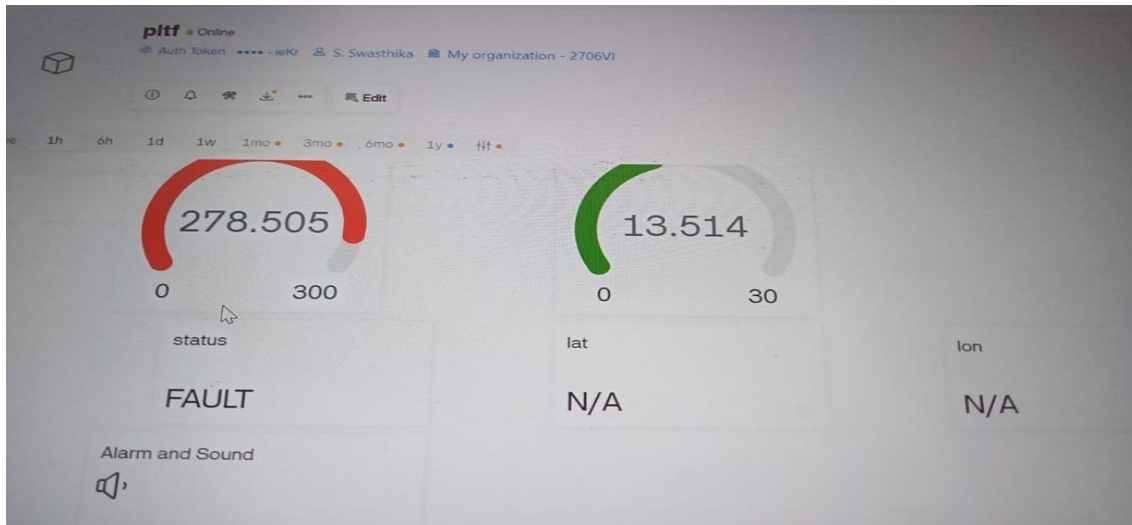


Bylnk Platform

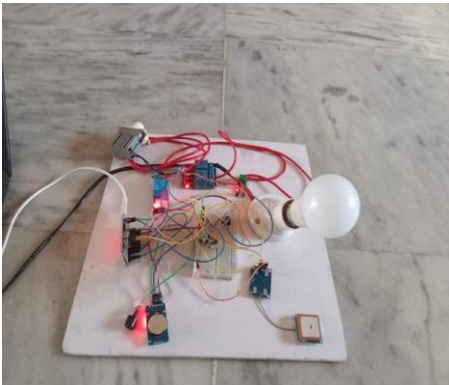

Fault Condition

```
1 #define BLYNK_TEMPLATE_ID "TMPL3SHLWUgpr"
2 #define BLYNK_TEMPLATE_NAME "pltf"
3 #define BLYNK_AUTH_TOKEN "1nqpyy9j8finsrky4861032ffiatr"
4
5 #include <Wire.h>
6 #include <RTClib.h>
7 #include <TinyGPS++.h>
8 #include <SPI.h>
9 #include <BlynkSimpleEsp32.h>
10
11 char ssid[] = "nodel 18";
12 char pass[] = "swasthika20";
13
14 #define RELAY 28
15 #define BUZZER 18
16 #define LAMP 19
17 #define VOLTAGE 0TH 18
18
19 BlynkSimpleEsp32(blynk);
20
21 void setup() {
22   pinMode(RELAY, OUTPUT);
23   pinMode(BUZZER, OUTPUT);
24   pinMode(LAMP, OUTPUT);
25   pinMode(VOLTAGE, OUTPUT);
26 }
27
28 void loop() {
29   // Your code here
30 }
```

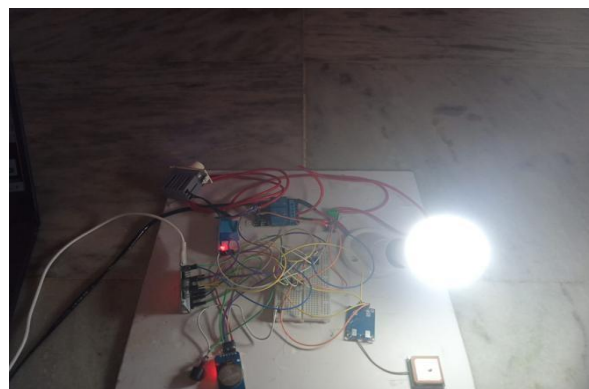

Normal Condition

