SunLink PV

BIFACIAL MONO TOPCON HALF CELL MODULE

SEMI+MBB

SL5M144
560-575 WATT

HIGHER POWER DENSITY
·Output up to 415watt on 2.584M²
·Module efficiency high to 22.25%
·Gain more solar power per square meter

SEMI+MBB
·Semi design deduce working temperature of operation and minimize hot-spot risk
·MBB design deduce cover of busbars and improve current collection ability on windy days
·Improve the output/watt

LIGHTER BUT MORE RELIABLE
·Modules are much lighter
·Thicker frames ensure modules much stronger

APPLIED UNDER STRICT CONDITIONS
·Modules could be applied under ammonia, salt mist, high temperature, high humidity condition

IP68
·IP68 junction boxes improve water-proof performance

EXCELLENT FIRE-PROOF PERFORMANCE
·Modules have passed anti-fire test

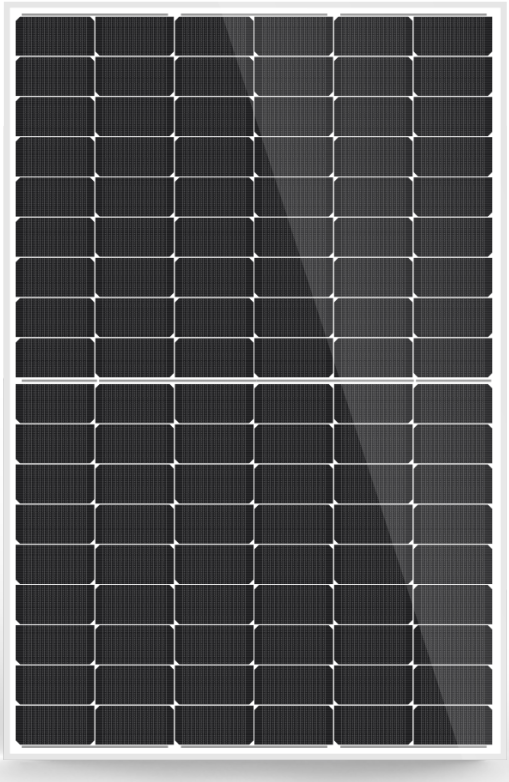

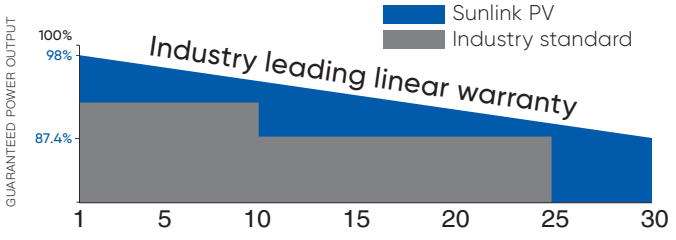

15 years product warranty | **30** years linear performance warranty

www.sunlink-pv.com info@sunlink-pv.com

SunLink PV

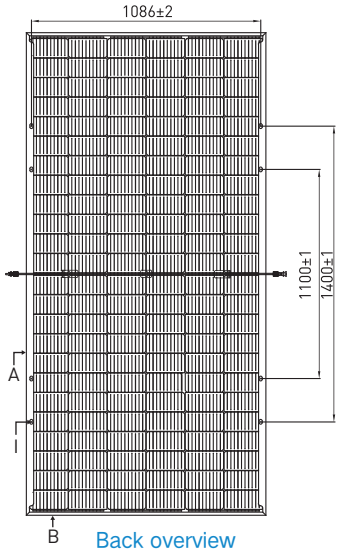

Back overview

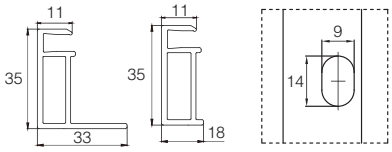

Current-Voltage & Power-Voltage Curves (SL5M144)

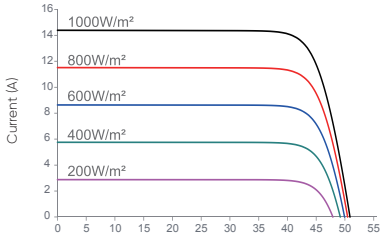

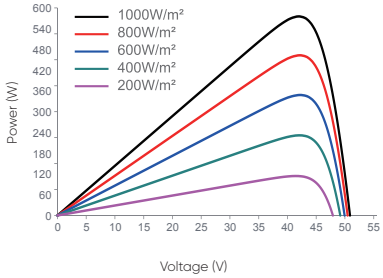

ELECTRICAL DATA (STC)

Rated Power In Watts-Pmax (Wp)	560	565	570	575
Maximum Power Voltage-Vmpp (V)	42.68	42.84	42.99	43.14
Maximum Power Current-Impp (A)	13.12	13.19	13.26	13.33
Open Circuit Voltage-Voc (V)	50.47	50.72	50.97	51.23
Short Circuit Current-Isc (A)	13.92	14.00	14.08	14.16
Module Efficiency (%)	21.67%	21.86%	22.06%	22.25%

STC: Irradiation 1000 W/m², Cell Temperature 25℃, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA (NMOT)

Maximum Power-Pmax (Wp)	419	424	429	435
Maximum Power Voltage-Vmpp (V)	39.73	39.93	40.15	40.32
Maximum Power Current-Impp (A)	10.54	10.62	10.70	10.78
Open Circuit Voltage-Voc (V)	48.03	48.27	48.51	48.75
Short Circuit Current-Isc (A)	11.15	11.21	11.27	11.33

NOCT: Irradiation: 800 W/m², ambient temperature: 20℃, air mass: 1.5, wind speed 1 m/s

Electrical Characteristics With Different Rear Side Power Again (Reference To 430w Front)

Pmax gain (%)	10%	20%	30%	40%	50%
Maximum Power (Pmax/W)	633	690	748	805	863
Maximum Power Voltage (Vmpp/V)	43.14	43.14	43.14	43.14	43.14
Maximum Power Current (Impp/A)	14.66	16.00	17.33	18.66	20.00

MECHANICAL CHARACTERISTICS

Solar Cells	Monocrystalline N-type, MBB
Cell Configuration	144 cells (6 x 12 x 2)
Module Dimensions	2279 x 1134 x 35 mm
Weight	32.0 kg
Glass	2.0mm Tempered ARC Glass
Back Sheet	2.0mm Glass
Frame	Anodized Aluminium Alloy, Silver
J-Box	IP68, 3 bypass diodes
Cables	4.0mm², (+) 380mm, (-) 380mm or customized length
Connector	MC4 Compatible

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44±2℃
Temperature Coefficient of VOC	-0.275% / ℃
Temperature Coefficient of ISC	0.045% / ℃
Temperature Coefficient of PMAX	-0.35% / ℃
Operational Temperature	-40℃~+85℃
Maximum System Voltage	1500VDC
Max Series Fuse Rating	25A

PACKAGING CONFIGURATION

	40 FT (HQ)
Number of Modules Per Container	620
Number of Modules Per Pallet	31
Number of Pallets Per Container	20