


## นาย วัชรพล ดวงกองเงิน 673380290-9 Sec 2

### pkt Link

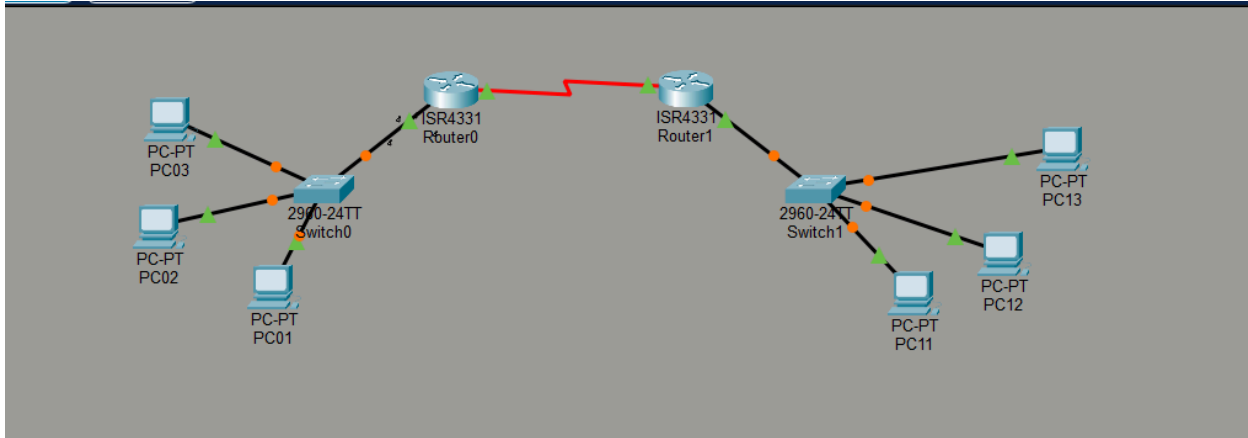

## Ping within Switch0 (PC01 ,PC02 and PC03)

- PC01 TO PC02 and PC03

```
PC01
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.3

Pinging 192.168.10.3 with 32 bytes of data:

Reply from 192.168.10.3: bytes=32 time=1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\>ping 192.168.10.4

Pinging 192.168.10.4 with 32 bytes of data:

Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

- PC02 TO PC01 and PC03

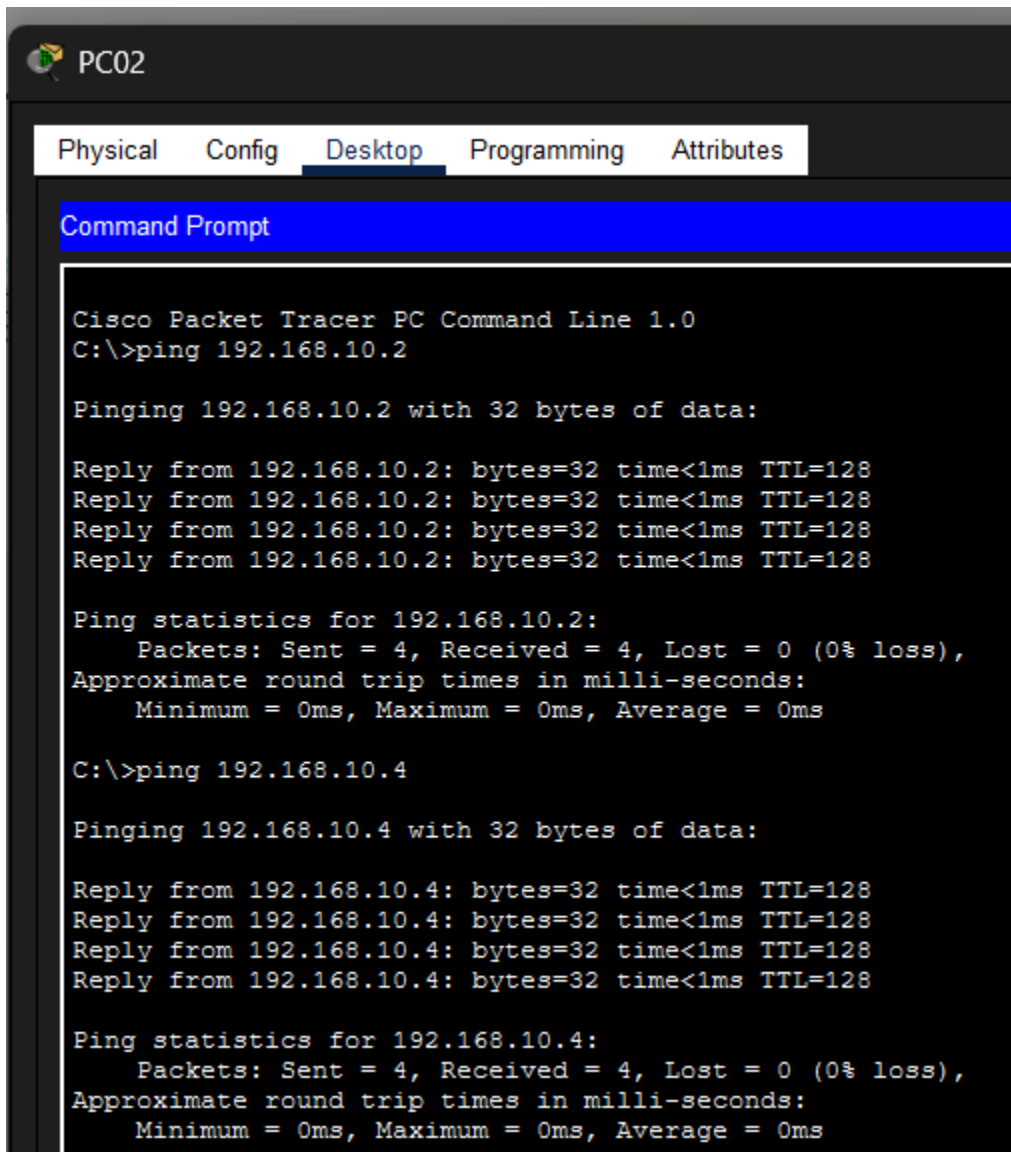

The screenshot shows the 'PC02' window in Cisco Packet Tracer. The 'Desktop' tab is selected, displaying a 'Command Prompt' window. The prompt shows the execution of two ping commands. The first command is 'ping 192.168.10.2', which results in four successful replies with 32 bytes of data, a time of less than 1ms, and a TTL of 128. The statistics show 4 packets sent, 4 received, and 0% loss. The second command is 'ping 192.168.10.4', which also results in four successful replies with identical metrics.

```
PC02
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>ping 192.168.10.4

Pinging 192.168.10.4 with 32 bytes of data:

Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

- PC03 TO PC01 and PC02

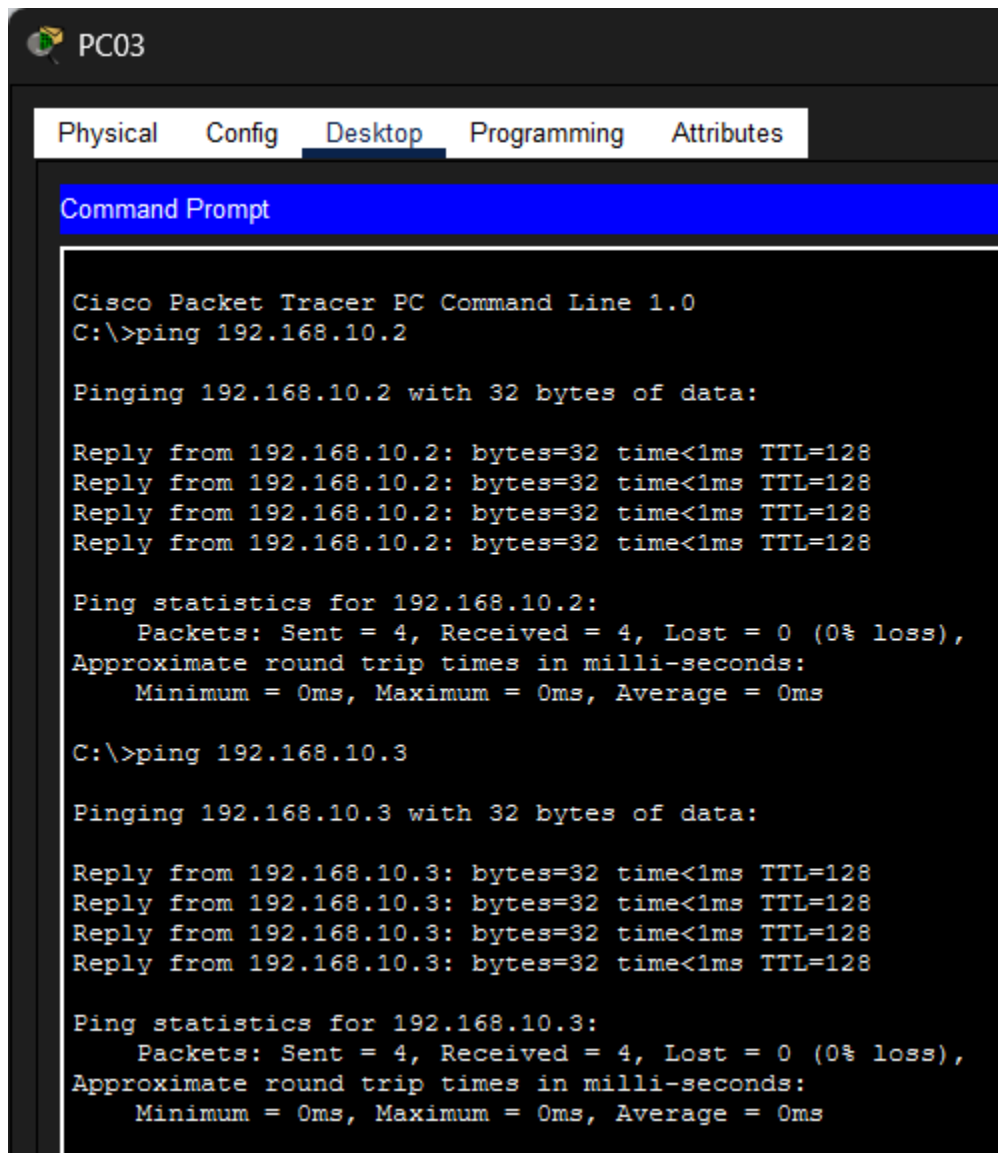

The screenshot shows the PC03 interface in Cisco Packet Tracer. The 'Desktop' tab is selected, displaying a 'Command Prompt' window. The window title is 'PC03'. The command prompt shows the execution of two ping commands: 'ping 192.168.10.2' and 'ping 192.168.10.3'. Both commands are successful, showing 4 replies with 0% loss and 0ms round trip times.

```
PC03
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.10.3


Pinging 192.168.10.3 with 32 bytes of data:

Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

## Ping within Switch1 (PC11 ,PC12 and PC13)

- PC11 TO PC12 and PC13

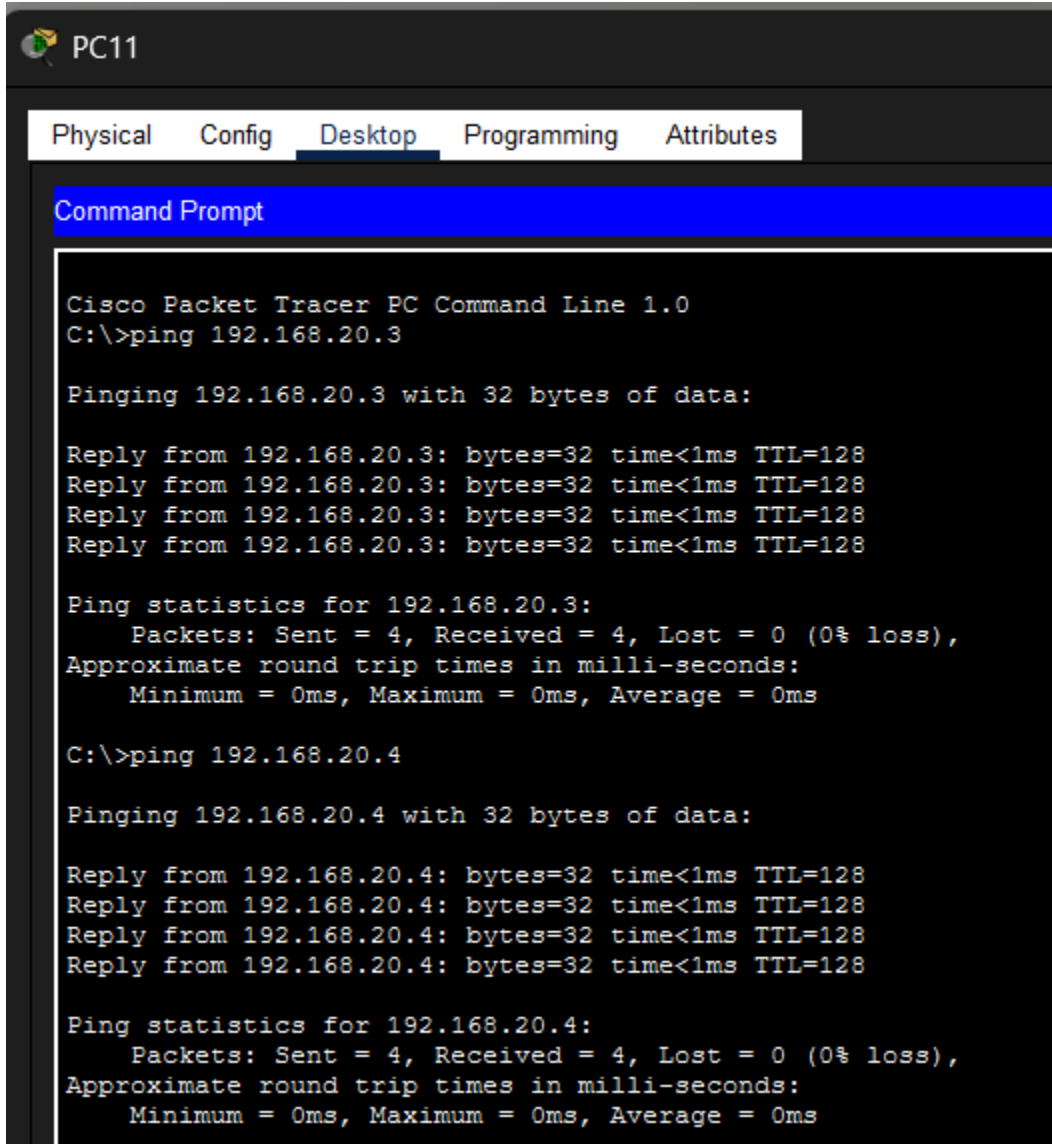

The screenshot shows the PC11 interface in Cisco Packet Tracer. The 'Desktop' tab is selected, displaying a 'Command Prompt' window. The command prompt shows the execution of two ping commands: 'ping 192.168.20.3' and 'ping 192.168.20.4'. Both commands result in successful pings with 0% loss and 0ms round trip times.

```
PC11
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>ping 192.168.20.4

Pinging 192.168.20.4 with 32 bytes of data:

Reply from 192.168.20.4: bytes=32 time<1ms TTL=128
Reply from 192.168.20.4: bytes=32 time<1ms TTL=128
Reply from 192.168.20.4: bytes=32 time<1ms TTL=128
Reply from 192.168.20.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

- PC12 TO PC11 and PC13

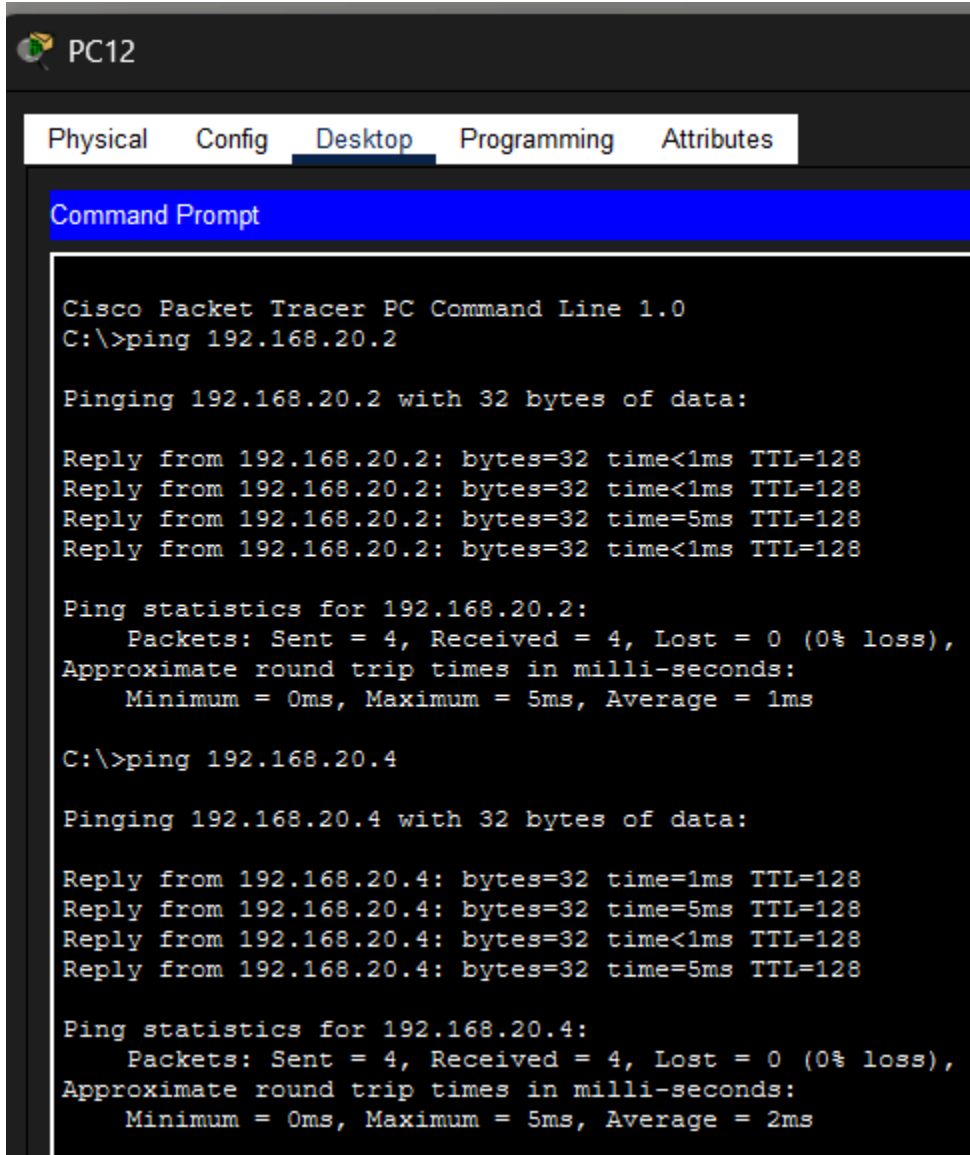

The screenshot shows the 'Desktop' tab of PC12 in Cisco Packet Tracer. The Command Prompt window displays the results of two ping commands. The first command is 'ping 192.168.20.2', which shows four successful replies with 32 bytes of data. The statistics indicate 4 packets sent, 4 received, 0 lost, and an average round trip time of 1ms. The second command is 'ping 192.168.20.4', which also shows four successful replies with 32 bytes of data. The statistics indicate 4 packets sent, 4 received, 0 lost, and an average round trip time of 2ms.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time<1ms TTL=128
Reply from 192.168.20.2: bytes=32 time<1ms TTL=128
Reply from 192.168.20.2: bytes=32 time=5ms TTL=128
Reply from 192.168.20.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 5ms, Average = 1ms


C:\>ping 192.168.20.4

Pinging 192.168.20.4 with 32 bytes of data:

Reply from 192.168.20.4: bytes=32 time=1ms TTL=128
Reply from 192.168.20.4: bytes=32 time=5ms TTL=128
Reply from 192.168.20.4: bytes=32 time<1ms TTL=128
Reply from 192.168.20.4: bytes=32 time=5ms TTL=128

Ping statistics for 192.168.20.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 5ms, Average = 2ms
```

- PC13 TO PC11 and PC12

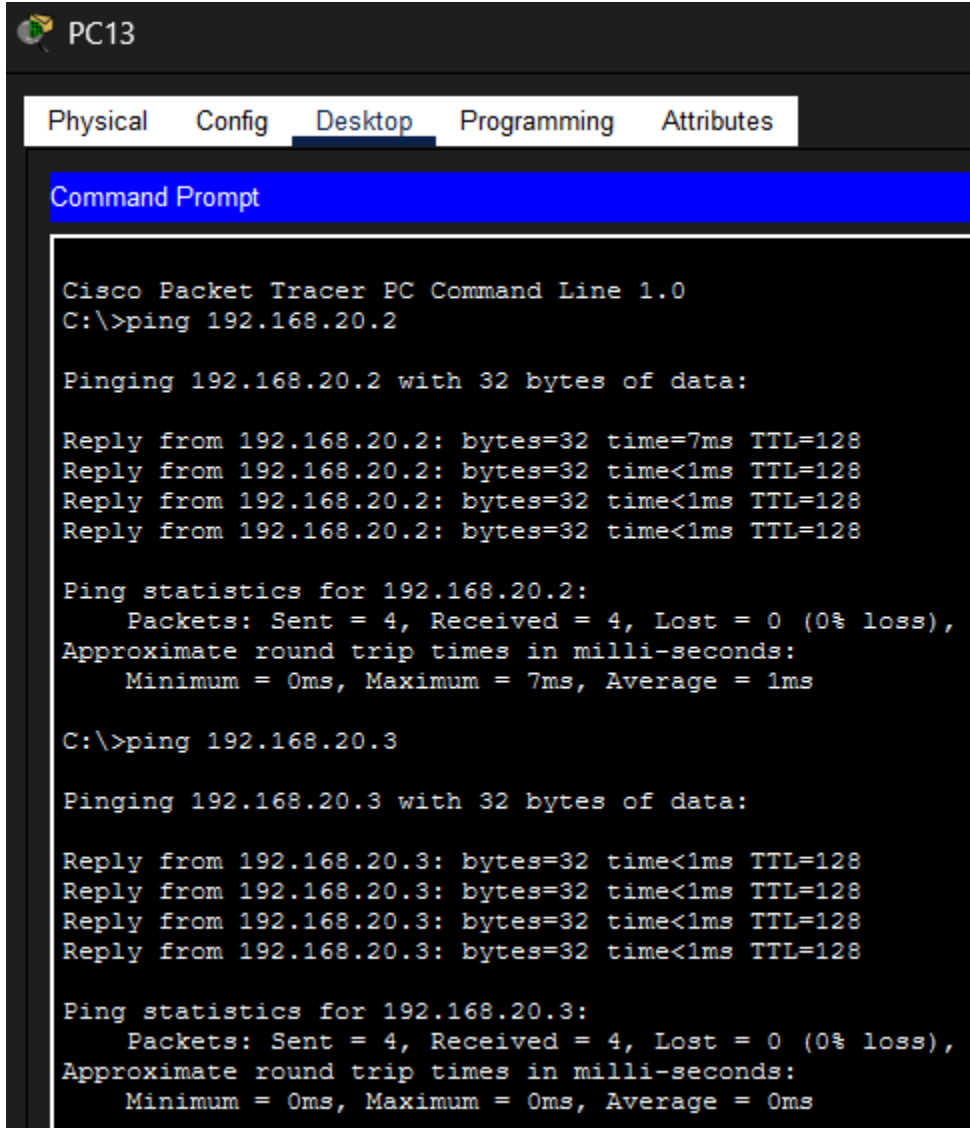

The screenshot shows the 'PC13' window in Cisco Packet Tracer. The 'Desktop' tab is selected, displaying a 'Command Prompt' window. The text in the Command Prompt is as follows:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=7ms TTL=128
Reply from 192.168.20.2: bytes=32 time<1ms TTL=128
Reply from 192.168.20.2: bytes=32 time<1ms TTL=128
Reply from 192.168.20.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128
Reply from 192.168.20.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

## Across The Subnet

### PC03 -> PC11

```
PC03
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\> ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=1ms TTL=126
Reply from 192.168.20.2: bytes=32 time=5ms TTL=126
Reply from 192.168.20.2: bytes=32 time=5ms TTL=126
Reply from 192.168.20.2: bytes=32 time=7ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 7ms, Average = 4ms

C:\> ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=8ms TTL=126
Reply from 192.168.20.2: bytes=32 time=1ms TTL=126
Reply from 192.168.20.2: bytes=32 time=6ms TTL=126
Reply from 192.168.20.2: bytes=32 time=2ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 8ms, Average = 4ms
```

### PC01->PC11

```
PC01
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Reply from 192.168.20.2: bytes=32 time=4ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 1, Lost = 3 (75% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 4ms, Maximum = 4ms, Average = 4ms

C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=9ms TTL=126
Reply from 192.168.20.2: bytes=32 time=1ms TTL=126
Reply from 192.168.20.2: bytes=32 time=6ms TTL=126
Reply from 192.168.20.2: bytes=32 time=5ms TTL=126

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 9ms, Average = 5ms
```

### PC02 -> PC11

```
PC02
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Request timed out.
Reply from 192.168.20.3: bytes=32 time=5ms TTL=126
Reply from 192.168.20.3: bytes=32 time=4ms TTL=126
Reply from 192.168.20.3: bytes=32 time=4ms TTL=126

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 4ms, Maximum = 5ms, Average = 4ms

C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Reply from 192.168.20.3: bytes=32 time=9ms TTL=126
Reply from 192.168.20.3: bytes=32 time=5ms TTL=126
Reply from 192.168.20.3: bytes=32 time=5ms TTL=126
Reply from 192.168.20.3: bytes=32 time=9ms TTL=126

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 5ms, Maximum = 9ms, Average = 7ms
```

