


PTS 004
Pavement Differential in Median Shoulder

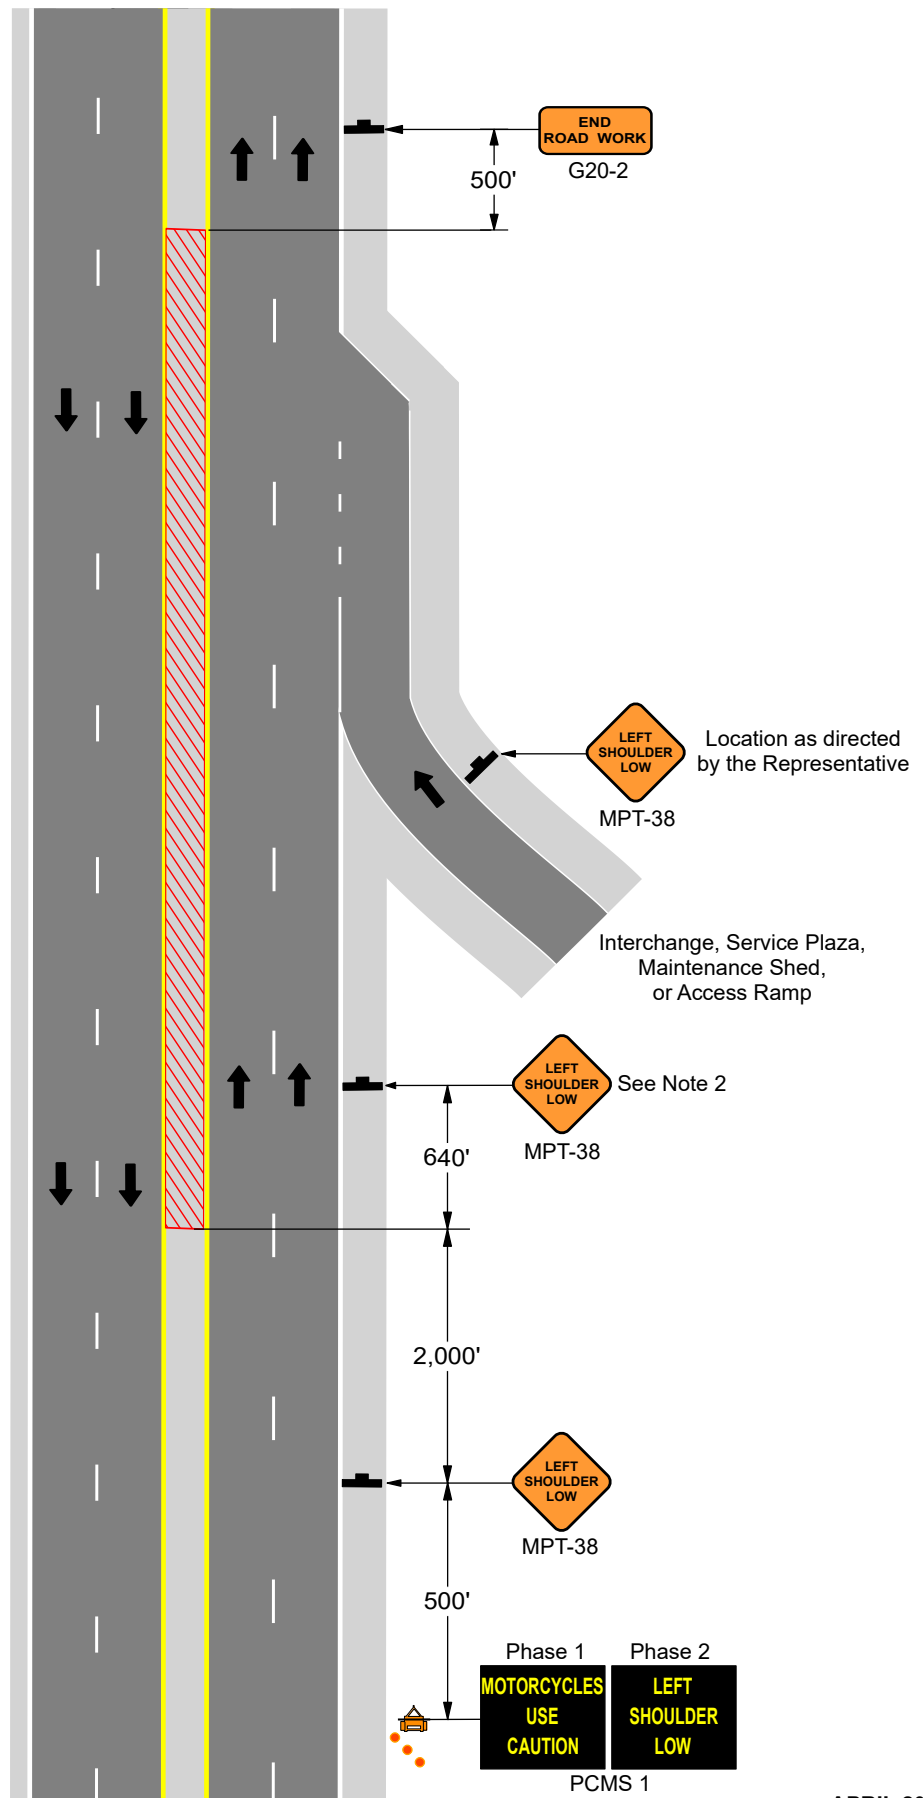

NOTES:

1. Completely cover conflicting signs and turn off PCMS when the milled/binder pavement is within a closed lane.

2. Place MPT-38 at 1/2 mile intervals through pavement differential.

3. See Appendix A for sign descriptions and sizes.