


**PTS 003**  
**Pavement Differential on Right Shoulder**

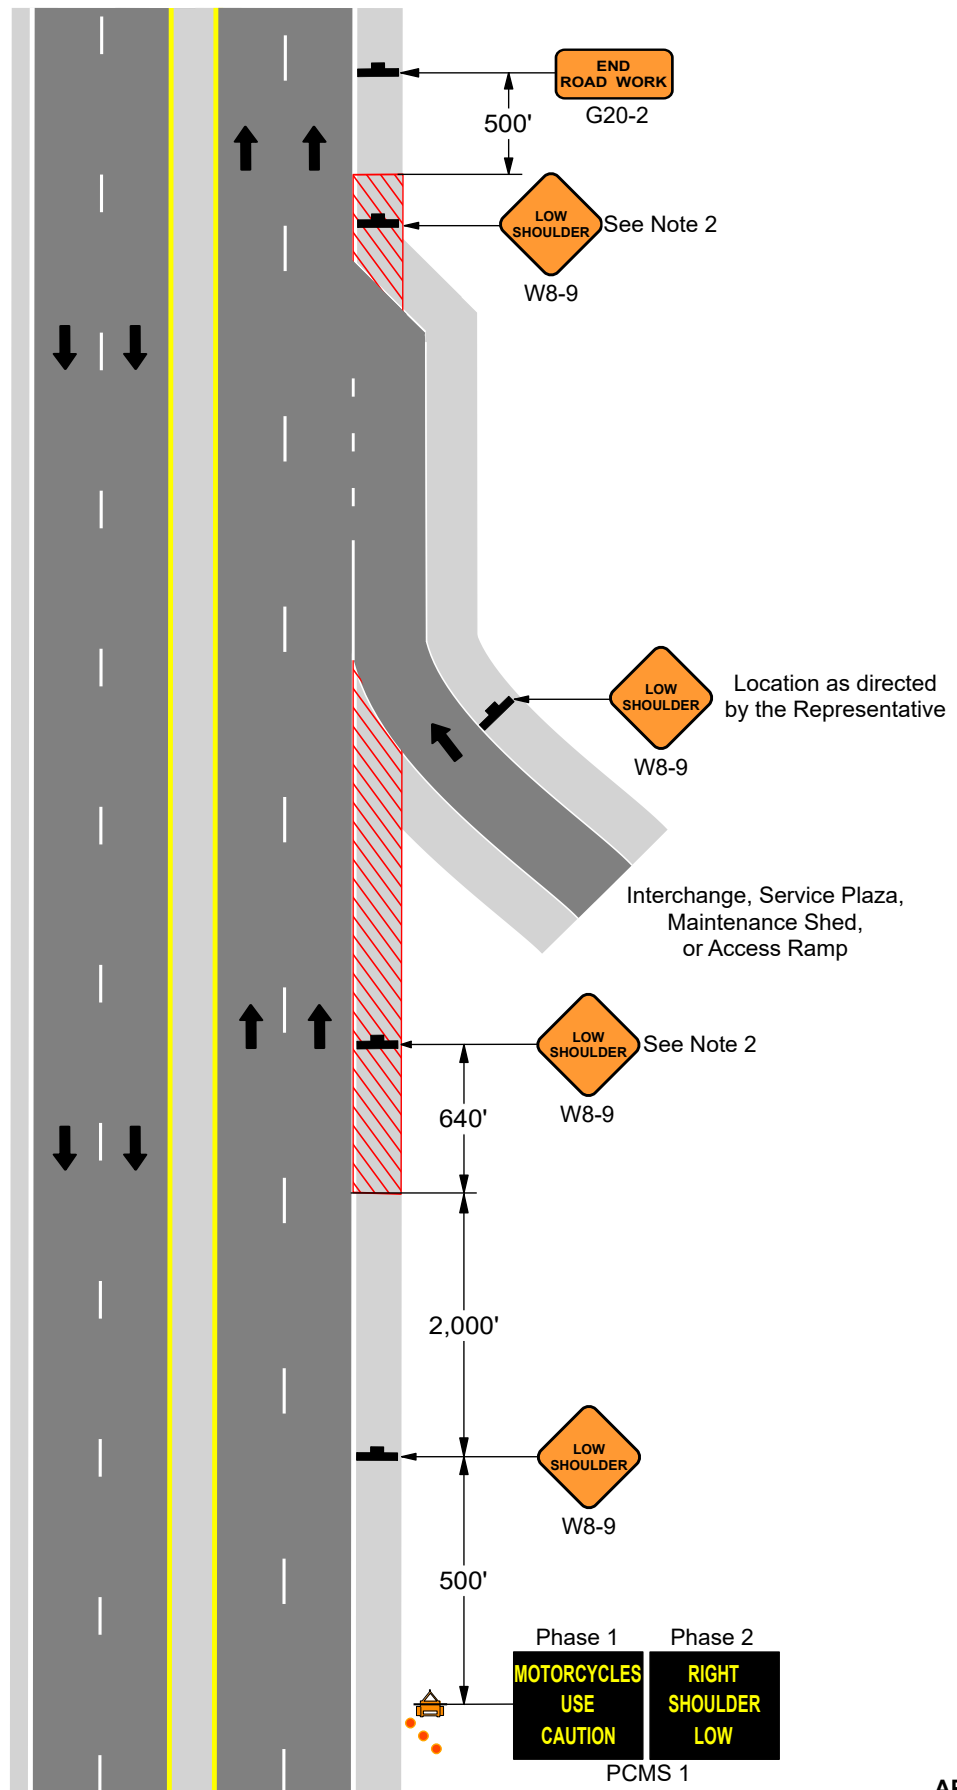

**NOTES:**

1. Completely cover conflicting signs and turn off PCMS when the milled/binder pavement is within a closed lane.
2. Place W8-9 at 1/2 mile intervals through pavement differential.
3. See Appendix A for sign descriptions and sizes.