



Chapter 4: Motion in 2 dimensions

Motion in a plane – 2D

Average Velocity

Average Acceleration

Projectile motion

Uniform Circular motion

Position

Velocity

Acceleration

General Motion Ideas




► In two- or three-dimensional kinematics, everything is the same as in one-dimensional motion except that we must now use full vector notation.

- Positive and negative signs are **no longer sufficient** to determine the direction.

Position and Displacement Vectors

- ▶ The **position** of an object is described by its position vector, $\vec{r}$.
 $\vec{r} = x\hat{i} + y\hat{j}$
- ▶ The **displacement** of the object is defined as the *change in its position*.
 $\Delta\vec{r} \equiv \vec{r}_f - \vec{r}_i$
 $\Delta\vec{r} = \Delta r_x\hat{i} + \Delta r_y\hat{j}$
 $= (r_{x,f} - r_{x,i})\hat{i} + (r_{y,f} - r_{y,i})\hat{j}$
- ▶ Independent of path

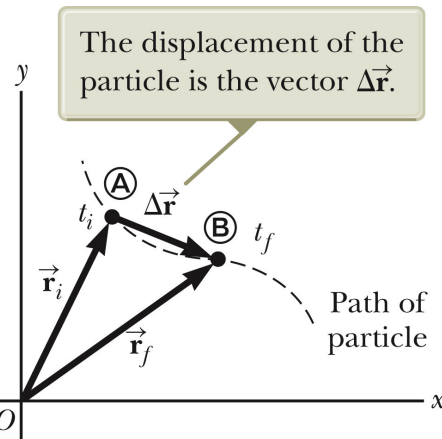

Section 4.1

Average and Instantaneous Velocity


- ▶ Following the same approach as in Ch 2 we define **average velocity**:

$$\vec{v}_{avg} = \frac{\Delta\vec{r}}{\Delta t} = \frac{\Delta r_x\hat{i} + \Delta r_y\hat{j}}{t_f - t_i}$$

$$= \frac{\Delta r_x}{\Delta t}\hat{i} + \frac{\Delta r_y}{\Delta t}\hat{j}$$

- ▶ Instantaneous velocity given by:

$$\vec{v} \equiv \lim_{\Delta t \rightarrow 0} \frac{\Delta\vec{r}}{\Delta t} = \frac{d\vec{r}}{dt}$$

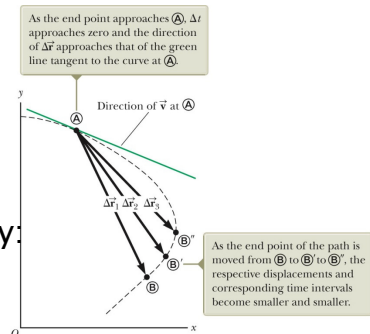

Section 4.1

4


Average and Instantaneous Velocity

- ▶ Instantaneous velocity given by:

$$\begin{aligned}\vec{v} &= \frac{d\vec{r}}{dt} = \frac{d(x\hat{i} + y\hat{j})}{dt} \\ &= \frac{dx}{dt}\hat{i} + \frac{dy}{dt}\hat{j} \\ &= v_x\hat{i} + v_y\hat{j}\end{aligned}$$

- ▶ Direction of $\vec{v}$ is always tangent to the particles path.
- ▶ Scalar components:

$$v_x = \frac{dx}{dt} \quad v_y = \frac{dy}{dt}$$

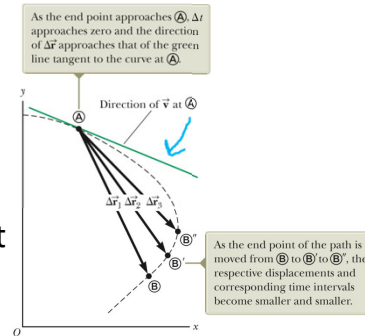


Section 4.1

5

Example

The figure shows a circular path taken by a particle. If the instantaneous velocity of the particle is $\vec{v} = (2 \text{ m/s})\hat{i} - (2 \text{ m/s})\hat{j}$ through which quadrant is the particle moving at that instant if it is travelling (a) clockwise and (b) counter-clockwise around the circle? For both cases, draw on the figure.



6

Average and Instantaneous Acceleration

- When a particle's velocity changes in a time interval Δt the **average acceleration** is:


$$\vec{a}_{avg} = \frac{\Delta \vec{v}}{\Delta t} = \frac{\vec{v}_f - \vec{v}_i}{t_f - t_i}$$

- As previously discussed the **instantaneous acceleration** is then:

$$\begin{aligned}\vec{a} &\equiv \lim_{\Delta t \rightarrow 0} \frac{\Delta \vec{v}}{\Delta t} = \frac{d\vec{v}}{dt} = \frac{d}{dt}(v_x \hat{i} + v_y \hat{j}) \\ &= \frac{dv_x}{dt} \hat{i} + \frac{dv_y}{dt} \hat{j} \\ &= a_x \hat{i} + a_y \hat{j}\end{aligned}$$

- Scalar components:

$$a_x = \frac{dv_x}{dt} \quad a_y = \frac{dv_y}{dt}$$

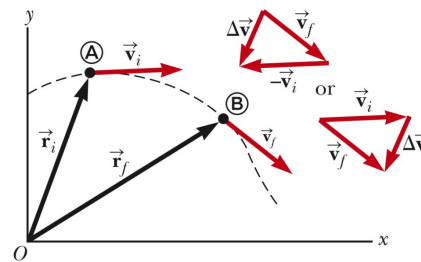

Section 4.1

7

Examples

- Here are four descriptions of the position (in meters) of a puck as it moves in an xy plane:

- $x = -3t^2 + 4t - 2$ and $y = 6t^2 - 4t$

- $x = -3t^3 - 4t$ and $y = -5t^2 + 6$

- $\vec{r} = 2t^2 \hat{i} - (4t + 3) \hat{j}$

- $\vec{r} = (4t^3 - 2t) \hat{i} + 3 \hat{j}$

Are the x and y acceleration components constant? Is the acceleration constant?

8

Examples

- Here are four descriptions of the position (in meters) of a puck as it moves in an xy plane:

1. $x = -3t^2 + 4t - 2$ and $y = 6t^2 - 4t$

$$a_x = \frac{d^2x}{dt^2} = -6$$

$$a_y = \frac{d^2y}{dt^2} = 12$$

2. $x = -3t^3 - 4t$ and $y = -5t^2 + 6$

$$a_x = \frac{d^2x}{dt^2} = -18t$$

$$a_y = \frac{d^2y}{dt^2} = -10$$

3. $\vec{r} = 2t^2\hat{i} - (4t + 3)\hat{j}$

$$a_x = \frac{d^2x}{dt^2} = 4$$

$$a_y = \frac{d^2y}{dt^2} = 0$$

4. $\vec{r} = (4t^3 - 2t)\hat{i} + 3\hat{j}$

$$a_x = \frac{d^2x}{dt^2} = 24t$$

$$a_y = \frac{d^2y}{dt^2} = 0$$

Are the x and y acceleration components constant? Is the acceleration constant?

9

Quick quiz 4.1

Consider the following controls in a car in motion:
(1) the accelerator, (2) the brake and (3) the steering wheel.

Which controls in this list cause an acceleration?

- (a) All three controls
- (b) The accelerator and brake
- (c) Only the brake
- (d) Only the accelerator
- (e) Only the steering wheel

10

Producing An Acceleration

- ▶ Various changes in a particle's motion may indicate an acceleration.
 - The **magnitude** of the velocity vector may change.
 - The **direction** of the velocity vector may change.
 - Even if the magnitude (speed) remains constant
 - **Both magnitude and direction** may change simultaneously

Section 4.1

11

Quick quiz 4.1

Consider the following controls in a car in motion:
(1) the accelerator, (2) the brake and (3) the steering wheel.

Which controls in this list cause an acceleration?

- (a) All three controls
- (b) The accelerator and brake
- (c) Only the brake
- (d) Only the accelerator
- (e) Only the steering wheel

12

2-D motion with constant acceleration

- ▶ Position $\vec{r} = x\hat{i} + y\hat{j}$
- ▶ Velocity $\vec{v} = \frac{d\vec{r}}{dt} = \frac{d(x\hat{i} + y\hat{j})}{dt}$

$$= \frac{dx}{dt}\hat{i} + \frac{dy}{dt}\hat{j} = v_x\hat{i} + v_y\hat{j}$$
- ▶ Substituting $v_{xf} = v_{xi} + a_x t$ and $v_{yf} = v_{yi} + a_y t$
- ▶ $\vec{v}_f = (v_{xi} + a_x t)\hat{i} + (v_{yi} + a_y t)\hat{j}$ similarly $\vec{r}_f = \vec{r}_i + \vec{v}_i t + \frac{1}{2}\vec{a}t^2$

$$= (v_{xi}\hat{i} + v_{yi}\hat{j}) + (a_x\hat{i} + a_y\hat{j})t$$

$$\vec{v}_f = \vec{v}_i + \vec{a}t$$

Section 4.2

13



Example

A particle with velocity $\vec{v} = -2.0\hat{i} + 4.0\hat{j}$ (in meters per second) at $t = 0$ undergoes a constant acceleration $\vec{a}$ of magnitude $a = 3.0 \text{ m/s}^2$ at an angle $\theta = 130^\circ$ from the positive direction of the x axis. What is the particle's velocity $\vec{v}$ at $t = 5 \text{ s}$?

14

Projectile Motion

- ▶ Special case: 2-D motion
- ▶ **Projectile motion**: particle moves in a vertical plane with an initial velocity $\vec{v}_0$ but acceleration is always the free fall of gravity downwards $\vec{a} = -\vec{g} = -9.8 \text{ m/s}^2$
- ▶ Assume no air resistance
- ▶ Path is shown
- ▶ Trajectory is always parabola

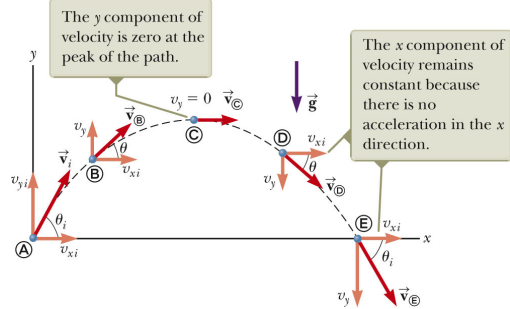

Section 4.3

15



16


Projectile motion

$$\vec{v}_i = v_{ix} \hat{i} + v_{iy} \hat{j}$$

$$v_{ix} = v_i \cos \theta$$

$$v_{iy} = v_i \sin \theta$$

- ▶ Position vector + velocity vector change continuously.
- ▶ **Acceleration is ALWAYS constant**, downwards
- ▶ **NO horizontal acceleration.**
- ▶ The horizontal motion and vertical motion are independent .
- ▶ Consider the motion as the superposition of the motions in the x - and y -directions.
- ▶ Solve the two dimensions separately.

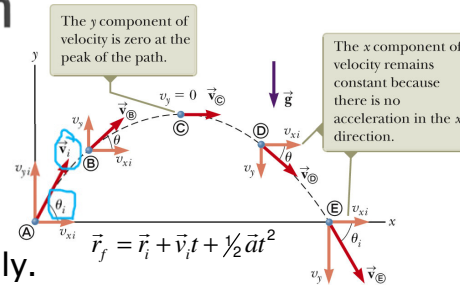

Section 4.3

17

Projectile Motion Analysed

- ▶ **Launch point:** x_i and y_i
 - Can be at the origin (but not necessarily)


- ▶ **Horizontal motion:**

- No acceleration
- Displacement: $\Delta x = x_f - x_i = v_{ix} t = (v_i \cos \theta) t$

if there's an a , then you sub -9.8
if there's a g , then only $+9.8$

- ▶ **Vertical motion:**

- Acceleration is constant: $\vec{a} = -\vec{g} = -9.8 \text{ m/s}^2$
- Can use equations from Ch 2
- Displacement $y_f - y_i = v_{iy} t + \frac{1}{2} a t^2$



$$= (v_i \sin \theta) t + \frac{1}{2} (-g) t^2 = (v_i \sin \theta) t - \frac{1}{2} g t^2$$

- Other equations

$$v_{yf} = v_i \sin \theta - g t = v_{iy} - g t$$

$$v_{yf}^2 = (v_i \sin \theta)^2 - 2 g \Delta y = v_{iy}^2 - 2 g \Delta y$$

Section 4.3

18

Projectile Motion Analysed

- ▶ Max height: h
- ▶ Range: R
- ▶ Time to reach h

$$v_{yf} = v_{yi} - gt$$


$$0 = v_i \sin \theta_i - gt$$

$$t = \frac{v_i \sin \theta_i}{g}$$

- ▶ Substituting this t into $y_f = y_i + v_{yi}t + \frac{1}{2}a_y t^2$

$$h = 0 + v_i \sin \theta_i \left(\frac{v_i \sin \theta_i}{g} \right) - \frac{1}{2}g \left(\frac{v_i \sin \theta_i}{g} \right)^2$$

$$h = \frac{v_i^2 \sin^2 \theta_i}{2g}$$

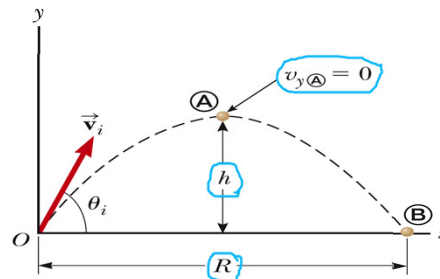

Section 4.3

19

Projectile Motion Analysed

- ▶ Time of flight $t_R = 2t_h = \frac{2v_i \sin \theta}{g}$


- ▶ Range:
- ▶ Horizontal velocity is constant

$$x_f = x_i + v_{xi}t$$

$$R = 0 + (v_i \cos \theta_i) \left(\frac{2v_i \sin \theta_i}{g} \right) = \left(\frac{2v_i^2 \sin \theta_i \cos \theta_i}{g} \right)$$

$$R = \frac{v_i^2 \sin 2\theta_i}{g}$$


- ▶ Max R ?



Section 4.3

20

Projectile Motion Analysed

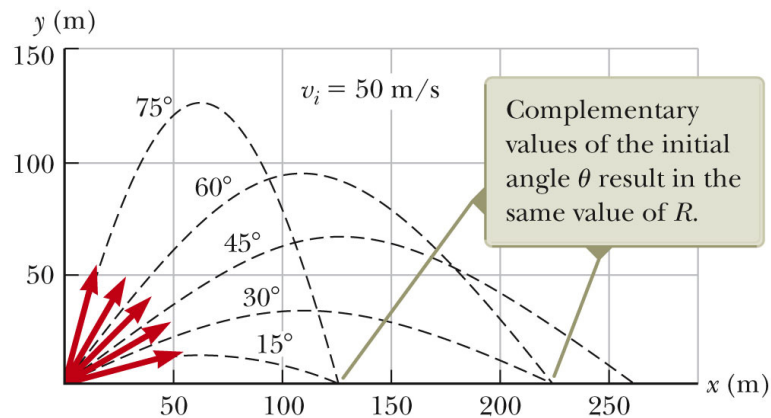

Section 4.3

21

Problem solving strategy

- ▶ Conceptualize
- ▶ Categorize – Choose axes (x – y), free fall (*vertical*)? Constant velocity (*horizontal*)
- ▶ Analyse – separate x and y variables and find components of variables
- ▶ Finalize – check to see if your answers are consistent with what should happen – is it realistic?

Section 4.3

22


Problem

A rifle with a muzzle velocity $v_0 = 450$ m/s shoots a bullet at a target 50 m away. How high above the target must the barrel be pointed? Assume the muzzle and the target are at the same height.

23

Problem



- ▶ At time $t = 0$ a golf ball is shot from ground level into the air, as shown in the figure. The angle θ between the ball's direction of travel and the positive x axis is given as a function of time t . The ball lands at $t = 6.00$ s.
 - What is the magnitude v_0 of the ball's launch velocity?
 - At what height $(y - y_0)$ above the launch level does the ball land?
 - What is the ball's direction of travel just before it lands?



24

Uniform Circular Motion

- ▶ A particle is in **uniform circular motion** if:
 - It travels in a circular arc
 - At a constant speed.
- ▶ Although speed is constant, there is acceleration
 - Velocity is changing direction
 - Velocity is directed tangent to the circle
 - Acceleration is directed to centre of the circle – centripetal acceleration.
 - If there was a component parallel to the speed, it would increase – not uniform circular motion



25




Uniform Circular Motion

- ▶ Consider the diagram with a particle moving from A to B on circular arc:

- Position vector, displacement in time Δt .
- Velocity vectors at A and B, and $\Delta \vec{v}$
- Positions triangle *similar* to velocities triangle.
- $\Delta \theta$ between the positions = $\Delta \theta$ between the velocity vectors.

$$\frac{|\Delta \vec{v}|}{v} = \frac{|\Delta \vec{r}|}{r}, \text{ where } v = v_i = v_f, r = r_i = r_f$$

$$|\vec{a}_{avg}| = \frac{|\Delta \vec{v}|}{|\Delta t|} = \frac{v |\Delta \vec{r}|}{r \Delta t}$$



26

Uniform Circular Motion


$$|\vec{a}_{avg}| = \frac{|\Delta \vec{v}|}{|\Delta t|} = \frac{v |\Delta \vec{r}|}{r \Delta t}$$

- As $\Delta t \rightarrow 0$, $|\Delta \vec{r}| \rightarrow d\vec{r}$ distance on circular path.

$$\frac{|\Delta \vec{r}|}{\Delta t} \rightarrow v$$

$$\vec{a}_c = \frac{v^2}{r}$$

- centripetal acceleration** (centre-seeking)

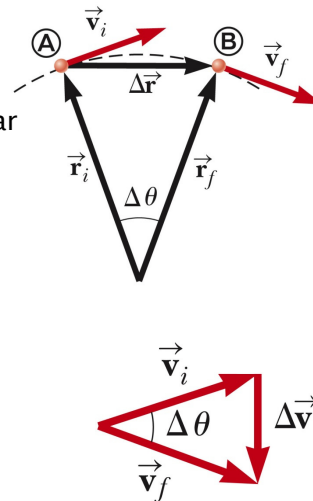

27

Uniform Circular Motion

- Period (T)** = time to complete one revolution

$$\text{speed} = \frac{\text{distance}}{\text{time}}$$

$$\therefore T = \frac{\text{distance}}{\text{speed}} = \frac{2\pi r}{v}$$

- Angular speed ω = revolutions per second
- SI units are Radians/s (ClickUP video to convert from $^\circ$ to radians)

$$\omega = \frac{2\pi}{T}$$

- Combining these two equations: $\omega = 2\pi \left(\frac{v}{2\pi r} \right) = \frac{v}{r}$

$$v = r\omega$$

- Substituting into acceleration: $a_c = \frac{v^2}{r} = \frac{(r\omega)^2}{r} = r\omega^2$

28


Example

- ▶ An object moves at constant speed along a circular path in a horizontal xy plane, with the centre at the origin. When the object is at $x = -2\text{m}$, its velocity is $-(4\text{m/s})\hat{j}$. Give the object's (a) velocity and (b) acceleration at $y = 2\text{ m}$.

29

Example

- ▶ An object moves at constant speed along a circular path in a horizontal xy plane, with the centre at the origin. When the object is at $x = -2\text{m}$, its velocity is $-(4\text{m/s})\hat{j}$. Give the object's (a) velocity and (b) acceleration at $y = 2\text{ m}$.

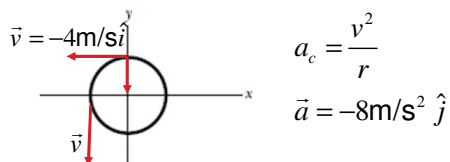

30

Problem

A satellite is at an altitude $h = 200$ km above the earth ($g = 9.2 \text{ m/s}^2$). Determine the satellite's velocity and its period.

The earth's radius is $6.37 \times 10^6 \text{ m}$.

31

Relative Motion

- ▶ Suppose you stand next to the road and observe a passenger on a bus travelling east at 40 km/h .
- ▶ At the same time, a passenger on another bus, travelling next to the first bus at the same velocity, observes the first passenger to be stationary.
- ▶ Velocity of a particle depends on the reference frame of the observer.
- ▶ A reference frame is a physical object to which we attach coordinate system.

Section 4.6

32

Relative Motion


- ▶ Two observers moving relative to each other generally do not agree on the outcome of an experiment.
- ▶ However, the observations seen by each are related to one another.

Section 4.6

33

Different Measurements example

- ▶ Observer A measures point P at +5 m from the origin
- ▶ Observer B measures point P at +10 m from the origin
- ▶ The difference is due to the different frames of reference being used.
- ▶ B moving to the right ...

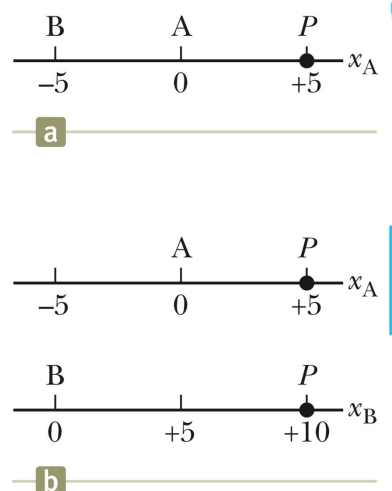


Section 4.6

Different Measurements example 2

- ▶ The man is walking on the moving walkway.
- ▶ The woman on the walkway sees the man walking at his normal walking speed.
- ▶ The stationary woman sees the man walking at a much higher speed.
 - The combination of the speed of the walkway and the walking.
- ▶ The difference is due to the relative velocity of their frames of reference.


The woman standing on the beltway sees the man moving with a slower speed than does the woman observing the man from the stationary floor.

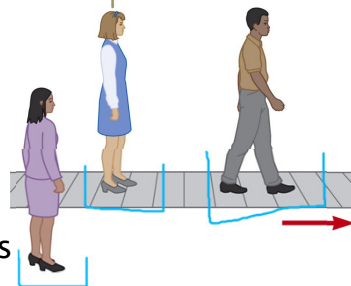

Section 4.6

Relative Velocity, generalized

- ▶ Reference frame S_A is stationary
- ▶ Reference frame S_B is moving to the right relative to S_A at $\vec{v}_{BA}$
 - This also means that S_A moves at $\vec{v}_{AB} = -\vec{v}_{BA}$ relative to S_B
- ▶ Define time $t = 0$ as that time when the origins coincide
- ▶ At time t they are separated by $v_{BA}t$

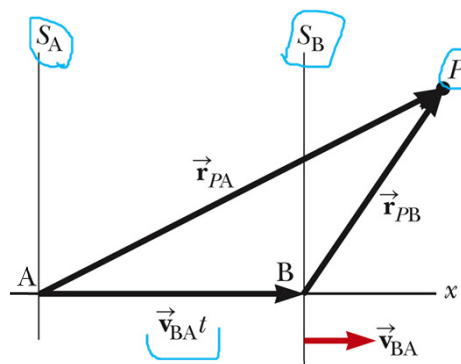

Section 4.6


Notation

- ▶ The first subscript represents what is being observed.
- ▶ The second subscript represents who is doing the observing.
- ▶ Example $\vec{v}_{BA}$
 - The velocity of B (and attached to frame S_B) as measured by observer A

Section 4.6

Relative Velocity, equations

- ▶ The positions as seen from the two reference frames are related through the velocity
 - $\vec{r}_{PA} = \vec{r}_{PB} + \vec{v}_{BA}t = \vec{r}_{PB} + \vec{r}_{BA}$
- ▶ The derivative of the position equation will give the velocity equation
 - $\vec{u}_{PA} = \vec{u}_{PB} + \vec{v}_{BA}$
 - $\vec{u}_{PA}$ is the velocity of the particle P measured by observer A
 - $\vec{u}_{PB}$ is the velocity of the particle P measured by observer B
- ▶ These are called the **Galilean transformation equations**.

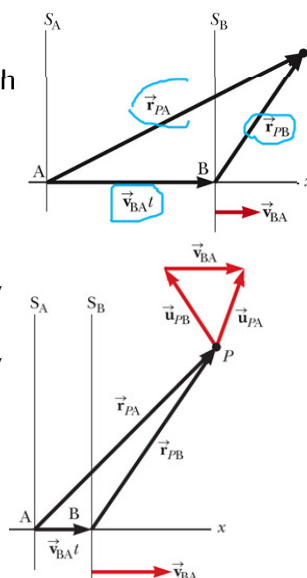

Section 4.6

Acceleration in Different Frames of Reference

- ▶ The derivative of the velocity equation will give the acceleration equation.
- ▶ The acceleration of the particle measured by an observer in one frame of reference is the same as that measured by any other observer moving at a ***constant velocity*** relative to the first frame.

Section 4.6

Acceleration, cont.

- ▶ Calculating the acceleration gives

$$\frac{d\vec{u}_{PA}}{dt} = \frac{d\vec{u}_{PB}}{dt} + \frac{d\vec{v}_{BA}}{dt}$$

- ▶ Since

$$\vec{v}_{BA} \text{ is constant, } d\vec{v}_{BA}/dt = 0$$

- ▶ Therefore, $\vec{a}_{PA} = \vec{a}_{PB}$

Section 4.6


Problem

Suppose that Bob's velocity relative to Alex is a constant $v_{BA} = 52 \text{ km/h}$ and car P is moving in the negative direction of the x axis. (a) If Alex measures a constant $v_{PA} = -78 \text{ km/h}$ for car P , what velocity v_{PB} will Bob measure? (b) If car P brakes to stop relative to Alex in time $t = 10 \text{ s}$ at constant acceleration, what is its acceleration a_{PA} relative to Alex? (c) What is the acceleration a_{PB} of car P relative to Bob during braking?

41

Problem

A plane moves due E while the pilot points the plane somewhat S of E, toward a steady wind that blows to the NE. The plane has velocity $\vec{v}_{PW}$ relative to the wind, with an airspeed, relative to the wind of 215 km/h directed at angle θ S of E. The wind has a velocity $\vec{v}_{WG}$ relative to the ground with a speed 65 km/h , directed 20.0° E of N. What is the magnitude of the velocity $\vec{v}_{PG}$ of the plane relative to the ground, and what is θ .

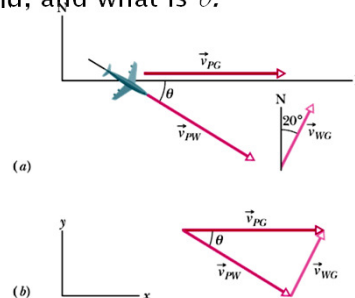

42