



# KSH-C6D-199\_STD-102 CLAMPED SHOES



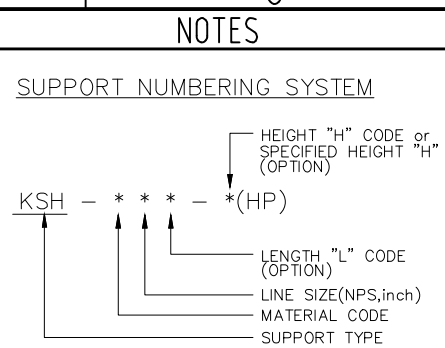

- NOTES**
- IF THE HEIGHT OR LENGTH OF SHOE IS NOT SPECIFIED IN SUPPORT NUMBERING, THE VALUE IS STD.
  - THE ISOLATOR SHALL BE BONDED ONLY ON THE INSIDE OF CLAMPS.
  - | HEIGHT    | MEMBER  |
|-----------|---|
| 150 ~ 180 | H200x200x8x12   |
| 181 ~ 200 | BUILT-UP H BEAM BY 16t CS PLATE<br>WEB HEIGHT = 200mm |
  - SPECIAL DETAIL FOR TAPER-TAPER POINT

## REFERENCE

NO	DWG NO	DESCRIPTION

**HEIN**  
GLOBAL UTAMA


**HEIN**  
GLOBAL UTAMA

**PT. KOKOH SEMESTA**  
ENGINEERING-MANUFACTURING-CONSTRUCTION

00	I F A	18/08/2023	FIVTY	SALEH	ADI. Y	Mr. Jeor	
ISSUE	DESCRIPTION	DATE	DRN	CHKD	APVD		

## REVISION

STD-102\_KSH-C6-199  
CLAMPED SHOES

	UNIT NO -	PROJ. NO -	SCALE NTS	SHEET 1
KS-HEIN-N4536				REV 00

KSH-C6D-199	STD-102	N4536	CLAMPED SHOES																1	11.55	0.28
KSH-C6D-199	STD-102-A	N4536	CLAMPED SHOES																		
KSH-C6D-199	STD-102-A-1	N4536	CLAMPED SHOES	CUT TEES	CS			200	x	200	x	8	x	13	x	350	L	1	11.55	0.28	
KSH-C6D-199	STD-102-A-3	N4536	CLAMPED SHOES	PIPE CLAMP	CS			9	x	237					x	65	L	2			
KSH-C6D-199	STD-102-B-1	N4536	CLAMPED SHOES	BOLT & NUT	CS			20	x						x	70	L	4			