



- NOTES
1. * WHERE A GAP OTHER THAN 2mm NOMINAL EACH SIDE IS REQUIRED, THIS IS CRITICAL AND SHALL BE SHOWN ON GAD AS GAP = x mm E.G. "GAP(E-W)=5mm" / "GAP(N-S)=10mm"
2. IF REQUIRED, THE SHIM PLATE SHALL BE PROVIDED BY FIELD AND THE SIZE OF THAT SHOULD BE LESS THAN PIPE O.D. & WIDTH OF BEAM FLANGE. PIPE O.D. SHALL BE INCLUDED THE THICKNESS OF WEAR PAD.



* : H = O.D./2 + "HS" + "T"

SUPPORT NUMBERING SYSTEM

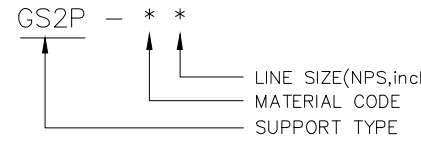

REFERENCE

NO	DWG NO	DESCRIPTION



00	I F I R	24/06/2023	FAUZAN	SALEH	ADI. Y
ISSUE	DESCRIPTION	DATE	DRN	CHKD	APVD

REVISION

DOC TITLE :				

LOTTE CHEMICAL	UNIT NO	PROJ. NO	SCALE	SHEET
	-	-	NTS	1
KS-HEIN-N0913				REV 00

GS2P-L4_STD-172

ANCHORS WITH 2 EA WEAR PAD FOR UNINSULATED LINES

GS2P-C2	STD-172	N0913													1	2.95
GS2P-C2	STD-172-A	N0913														
GS2P-C2	STD-172-A1	N0913	WEAR PAD	LTCS	6.02	x	12	"		SCH	STD	x	150	L	2	1.61
GS2P-C2	STD-172-A2	N0913	PLATE	CS	9	x	50					x	120	L	2	0.85
GS2P-C2	STD-172-A3	N0913	PLATE	CS	9	x	50					x	70	L	2	0.49
GS2P-C2	STD-172-A3	N0913	ANGLE	CS	50	x	50	x	6			x	77	L	2	0.68