



NOTES

- 1. IF THE HEIGHT OR LENGTH OF SHOE IS NOT SPECIFIED IN SUPPORT NUMBERING, THE VALUE IS STD.
- 2. THE ISOLATOR SHALL BE BONDED ONLY ON THE INSIDE OF CLAMPS.
- 3. * WHERE A GAP OTHER THAN 2mm NOMINAL EACH SIDE IS REQUIRED, THIS IS CRITICAL AN SHALL BE SHOWN ON GAP AS GAP = x mm., E.G) "GAP(E-W)=5mm" / "GAP(N-S)=10mm"
- 4. SPECIAL DETAIL FOR TAPER-TAPER POINT SHALL BE AS BELOW.

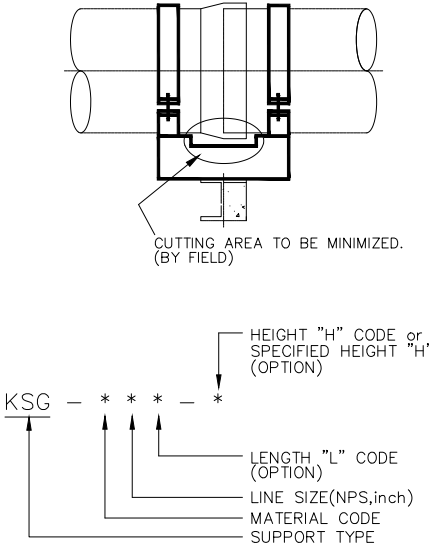


REFERENCE


NO	DWG NO	DESCRIPTION



HEIN
GLOBAL UTAMA



HEIN
GLOBAL UTAMA




PT. KOKOH SEMESTA
ENGINEERING-MANUFACTURING-CONSTRUCTION

00	I F I R	26/07/2023	FAUZAN	SALEH	ADI. Y	Mr. Jeon									
ISSUE	DESCRIPTION	DATE	DRN	CHKD	APVD										

REVISION

DOC TITLE :

KSH-O6-D(HP)_STD-122(HP)
CLAMPED SHOES & GUIDE FOR
HIGH PRESSURE

	UNIT NO	PROJ. NO	SCALE	SHEET
	-	-	NTS	1
KS-HEIN-N3806				REV 00