


C100X50X5X7.5X50L (A36)  
BA7-ACA6-F STD-227A-2

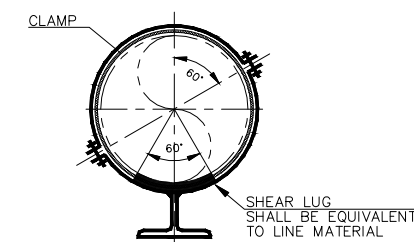

## NOTES

1. \* WHERE A GAP OTHER THAN 2mm NOMINAL EACH SIDE IS REQUIRED, THIS IS CRITICAL AND SHALL BE SHOWN ON GAD AS GAP = x mm", E.G) "GAP(E-W)=5mm" / "GAP(N-S)=10mm",
2. THE ISOLATOR SHALL BE BONDED ONLY ON THE INSIDE OF CLAMPS.
3. SHEAR LUGS IS REQUIRED IF LINE MATERIAL IS METAL EXCEPT GALV./ LINED/ COATED CS AND ITS SIZE IS DN100(4") OR ABOVE.  
DETAIL SHOULD BE REFERRED TO BELOW.

## REFERENCE




HEIN  
GLOBAL UTAMA

PT. KOKOH SEMESTA  
ENGINEERING-MANUFACTURING-CONSTRUCTION

|       |             |            |        |       |        |        |  |
|-------|-------------|------------|--------|-------|--------|--------|--|
|       |             |            |        |       |        |        |  |
|       |             |            |        |       |        |        |  |
|       |             |            |        |       |        |        |  |
|       |             |            |        |       |        |        |  |
| 00    | I F A       | 09/10/2023 | SAEPUL | SALEH | ADI. Y | Mr. Je |  |
| ISSUE | DESCRIPTION | DATE       | DRN    | CHKD  | APVD   |        |  |

## REVISION

BA7-ACA6-F\_STD-227  
SHOE & ANCHOR FOR  
UNINSULATED VERTICAL  
LINES

|   |         |          |       |           |
|---|---------|----------|-------|-----------|
|  | UNIT NO | PROJ. NO | SCALE | SHEET     |
|   | -       | -        | NTS   | 1         |
| KS-HEIN-N6783   |         |          |       | REV<br>00 |

| BA7-ACA6-F | STD-227    | N6783 | SHOE & ANCHOR FOR UNINSULATED VERTICAL LINES |          |    |  |  |  |     |   |     |   |     |   |     |   |     |   | 1 | 22.21 | 0.74 |
|------------|------------|-------|--|----------|----|--|--|--|-----|---|-----|---|-----|---|-----|---|-----|---|---|-------|------|
| BA7-ACA6-F | STD-227A   | N6783 | SHOE & ANCHOR FOR UNINSULATED VERTICAL LINES |          |    |  |  |  |     |   |     |   |     |   |     |   |     |   |   |       |      |
| BA7-ACA6-F | STD-227A-1 | N6783 | SHOE & ANCHOR FOR UNINSULATED VERTICAL LINES | H BEAM   | CS |  |  |  | 100 | x | 100 | x | 6   | x | 8   | x | 753 | L | 1 | 12.93 | 0.45 |
| BA7-ACA6-F | STD-227A-2 | N6783 | SHOE & ANCHOR FOR UNINSULATED VERTICAL LINES | CHANNEL  | CS |  |  |  | 100 | x | 50  | x | 5   | x | 7.5 | x | 50  | L | 2 | 0.94  | 0.04 |
| BA7-ACA6-F | STD-227A-3 | N6783 | SHOE & ANCHOR FOR UNINSULATED VERTICAL LINES | CUT TEES | CS |  |  |  | 100 | x | 100 | x | 5.5 | x | 8   | x | 350 | L | 1 | 3.73  | 0.14 |
| BA7-ACA6-F | STD-227A-4 | N6783 | SHOE & ANCHOR FOR UNINSULATED VERTICAL LINES | CUT TEES | CS |  |  |  | 100 | x | 100 | x | 5.5 | x | 8   | x | 50  | L | 1 | 0.53  | 0.02 |
| BA7-ACA6-F | STD-227B-1 | N6783 | SHOE & ANCHOR FOR UNINSULATED VERTICAL LINES | PLATE    | CS |  |  |  | 13  | x | 200 |   |     |   |     | x | 200 | L | 1 | 4.08  | 0.09 |