

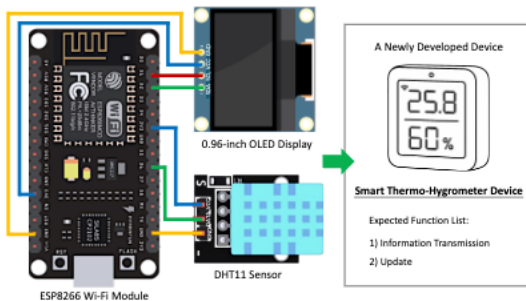


Figure 13: The self-developed smart thermo-hygrometer device is composed of an ESP8266 Wi-Fi module, a DHT11 sensor, and an OLED display. This device serves as a representative of emerging new smart devices that have yet to be integrated, where AutoBridge can provide valuable support.

```

3 from datetime import timedelta
4 from homeassistant.components.sensor import SensorEntity
5 from homeassistant.const import TEMP_CELSIUS, PERCENTAGE
6 from homeassistant.helpers.entity import Entity
7 from homeassistant.util import Throttle
8
9 _LOGGER = logging.getLogger(__name__)
10
11 SCAN_INTERVAL = timedelta(seconds=60)
12
13 DEFAULT_HOST = "http://192.168.137.60"
14 DEFAULT_PORT = 80
15 DEFAULT_PATH = "/data"
16
17 def setup_platform(hass, config, add_entities, discovery_info=None):
18     host = config.get("host", DEFAULT_HOST)
19     port = config.get("port", DEFAULT_PORT)
20     path = config.get("path", DEFAULT_PATH)
21
22     add_entities([ESP8266TemperatureHumiditySensor(host, port, path)], True)
23
24 class ESP8266TemperatureHumiditySensor(SensorEntity):
25
26     def __init__(self, host, port, path):
27         self._host = host
28         self._port = port
29         self._path = path
30         self._temperature = None
31         self._humidity = None
32         self._name = "ESP8266 Temperature & Humidity Sensor"
33
34     @property
35     def name(self):
36         return self._name
37
38     @property
39     def state(self):
40         return self._temperature
41
42     @property
43     def extra_state_attributes(self):
44         return {
45             "humidity": self._humidity
46         }

```