

Alumage Advisors ☆☆☆☆☆
HQ: Boston, MA, Offices: San Jose, CA -- Shenzhen, China,
pcraine@alumageadvisors.com,
978-828-5456,
www.alumageadvisors.com,

GE Lightin Albeo

Report of Evidence of Use

The views presented here are of the author only and do not necessarily reflect the views of others. The author is an independent contractor that acts on behalf of neither the patent owner nor any other third party, including ClaimCharts.info. We would like to thank ClaimCharts.info for introducing to us the opportunity to prepare this report. For comments and questions, please feel free to contact us directly, or via my profile at ClaimCharts.info.

Patent Number: USUS7557524

Claim Number: (1


1. An illumination lighting device comprising a plurality of illumination groups, each of said illumination groups containing one or more light emitting diodes and being configured for passing between an energized light emitting state and a non-energized state, and control means for maintaining the luminosity of the lighting device at a desired level, said luminosity being controlled by, at predetermined time intervals, said transfer is effected in response to a luminosity reading and/or a usage time measurement, and a luminosity measuring system comprising i) luminosity measuring means, ii) one or more test light emitting diodes said luminosity measuring means being able to provide said luminosity reading at predetermined time intervals, on the basis of the light of said one or more test light emitting diodes when said one or more test light emitting diodes are in an energized state, wherein said one or more test light emitting diodes are selected from among light emitting diodes which are part of said illumination groups and which are separate from said illumination groups. transferring an appropriate number of illumination groups between said energized light emitting state and said non-energized state, whereby for each of said illumination groups at predetermined time intervals, and equivalent to the light emitting diodes of said plurality of illumination groups,

Element 1:

1. An illumination lighting device comprising a plurality of illumination groups, each of said illumination groups containing

Albeo™ ABHX Series LED Luminaire utilizes innovative heat-sinking and cutting-edge LED technology (http://www.gelighting.com/LightingWeb/na/solutions/indoor-lighting/albeo-led-luminaire-abhx.jsp#sthash.hyfVgpHE.dpuf) Each ABH series fixture contains 1, 2, 3, 4, or 6 light bars: each bar contains 2 groups of LEDs. (ALB005-GE-LED-Fixtures-Albeo-ABH-Series-Modular-High-and-Low-Bay-Luminaire-Brochure_tcm201-65236.pdf)

Supporting Evidence:

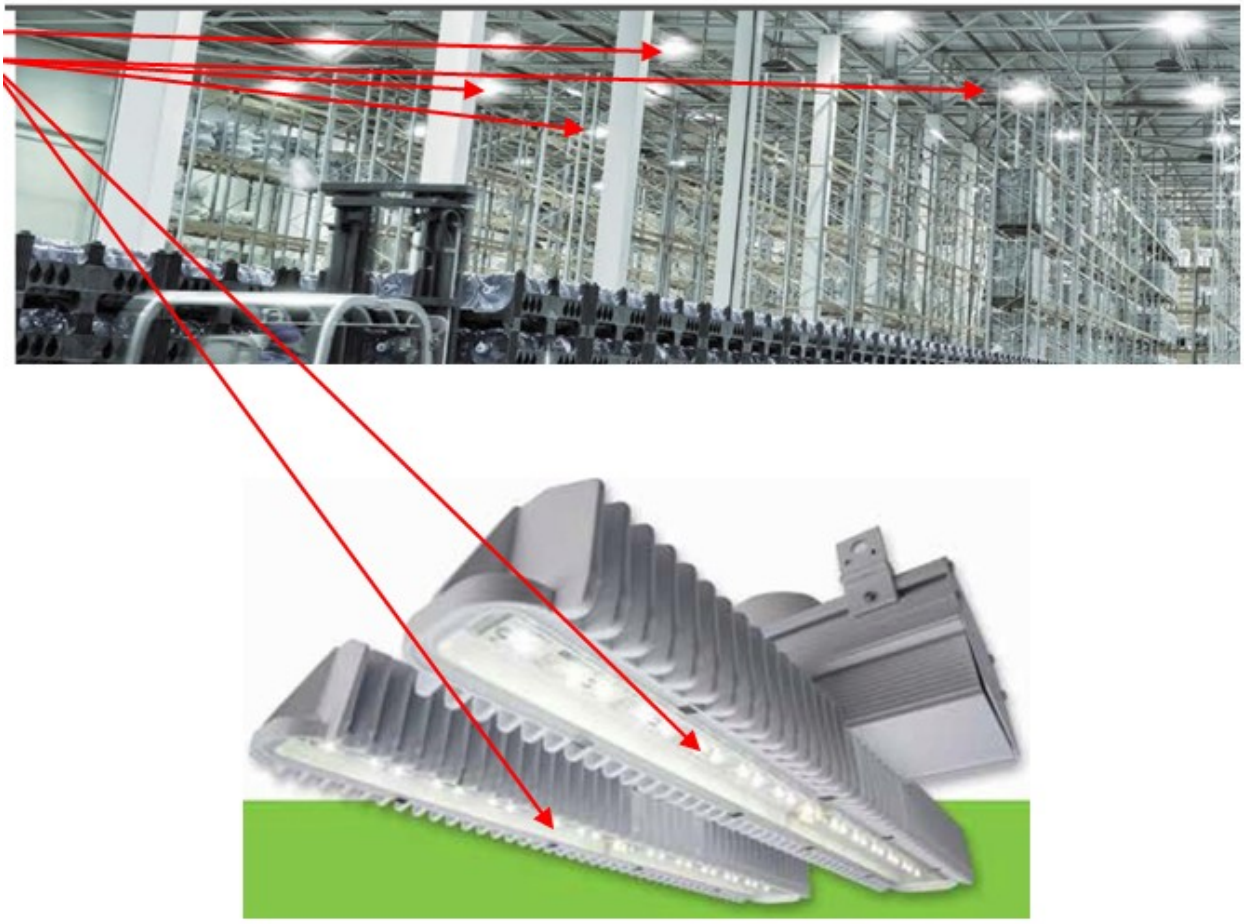


Element 2:

one or more light emitting diodes and

Albeo™ ABHX Series LED Luminaire utilizes innovative heat-sinking and cutting-edge LED technology (http://www.gelighting.com/LightingWeb/na/solutions/indoor-lighting/albeo-led-luminaire-abhx.jsp#sthash.hyfVgpHE.dpuf) Each ABH series fixture contains 1, 2, 3, 4, or 6 light bars: each bar contains 2 groups of LEDs. (ALB005-GE-LED-Fixtures-Albeo-ABH-Series-Modular-High-and-Low-Bay-Luminaire-Brochure_tcm201-65236.pdf)

Supporting Evidence:

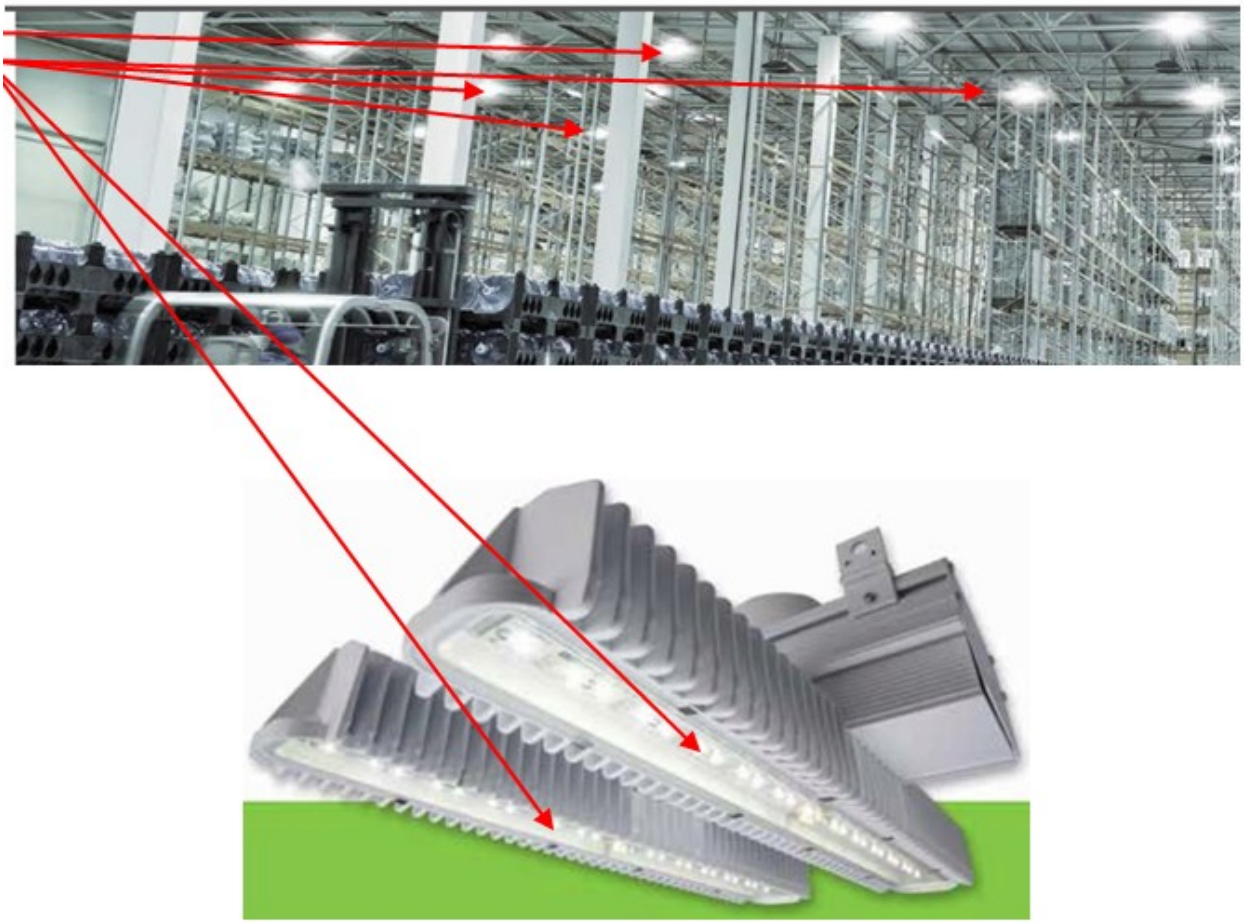


Element 3:

being configured for passing between an energized light emitting state and a non-energized state, and

GE Aware^{TM} HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:

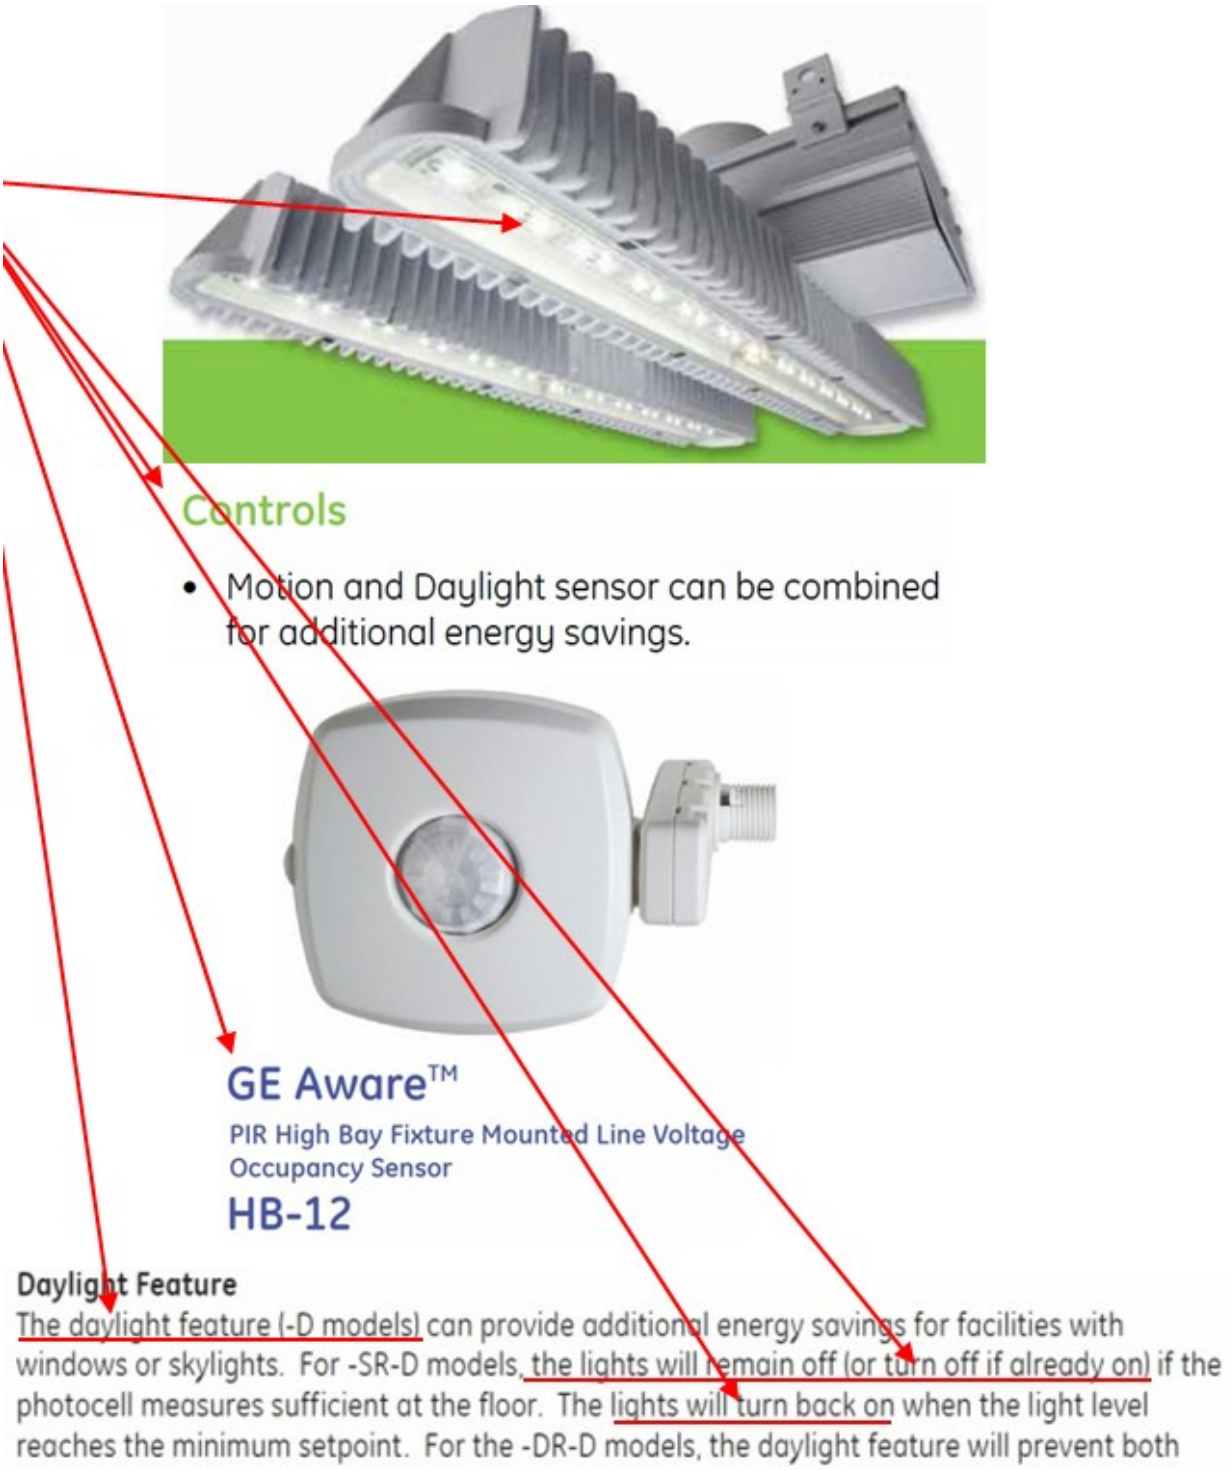


Element 4:

control means for maintaining the luminosity of the lighting device at a desired level,

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:

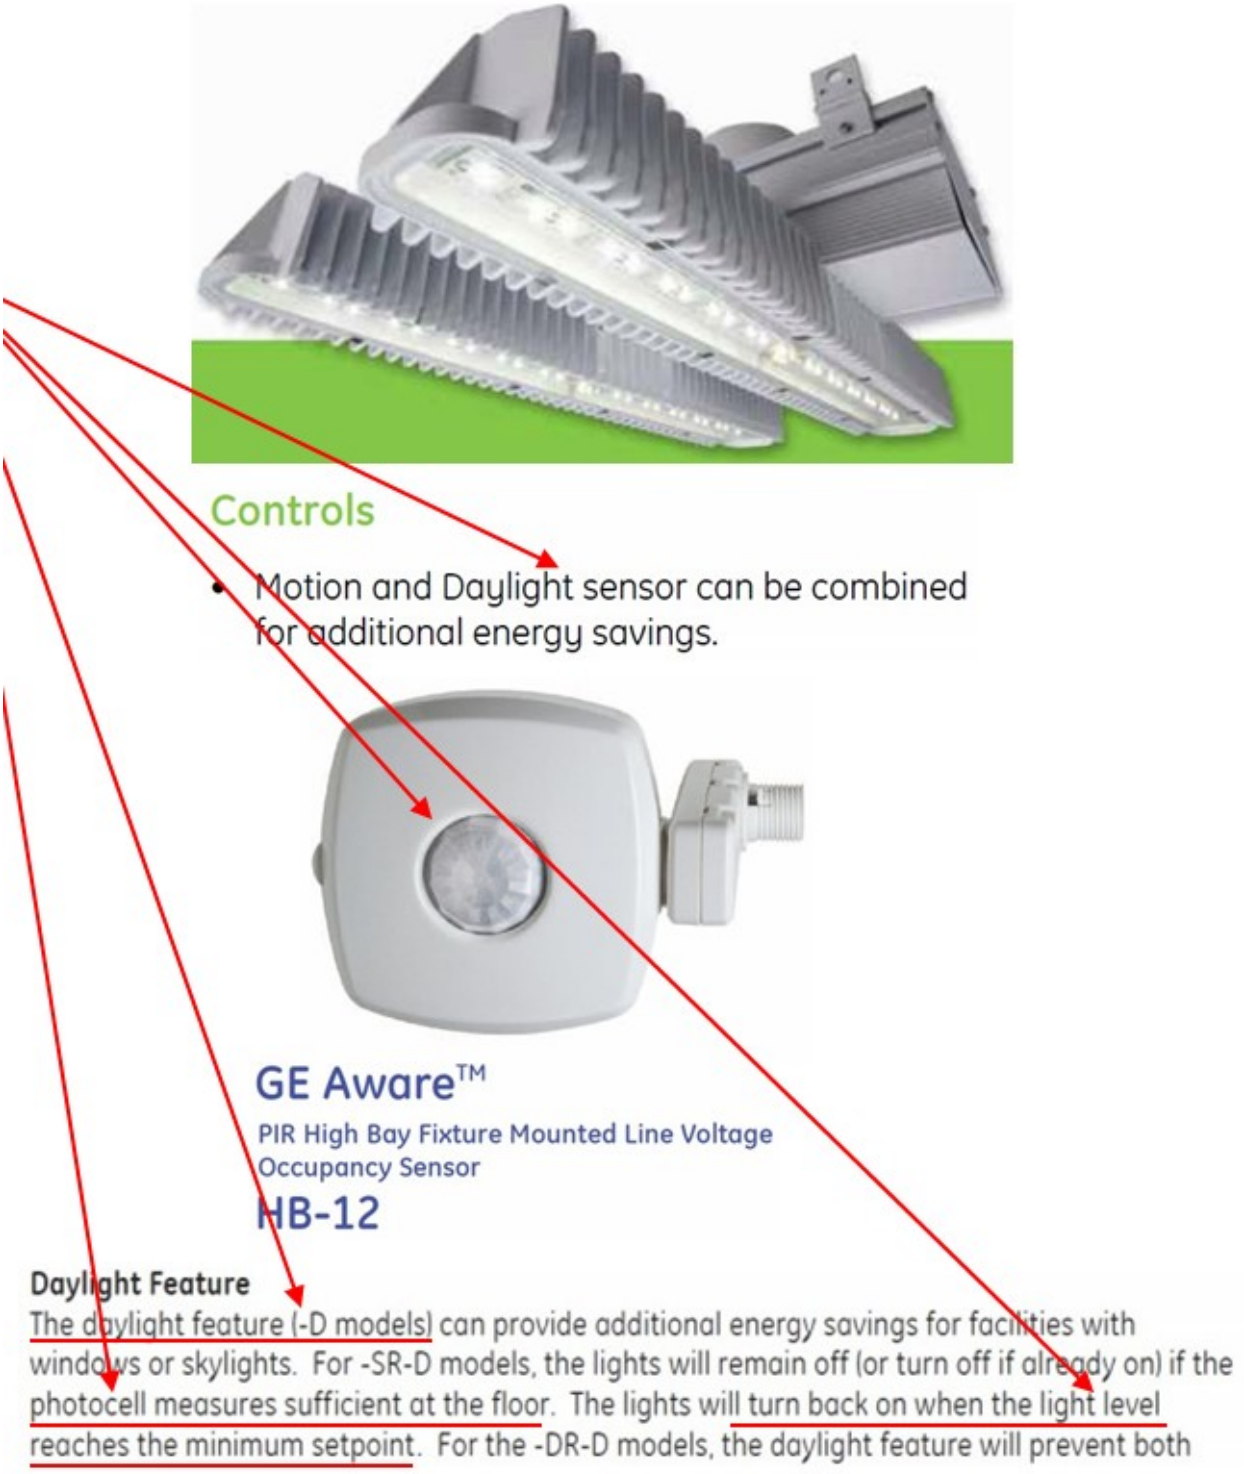


Element 5:

said luminosity being controlled by, at predetermined time intervals,

GE Aware™ HB-12 lighting control (-D model), has DIP switch settings to select various preset delays for operation, preventing the lights from switching on/off caused by short term transient light levels. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



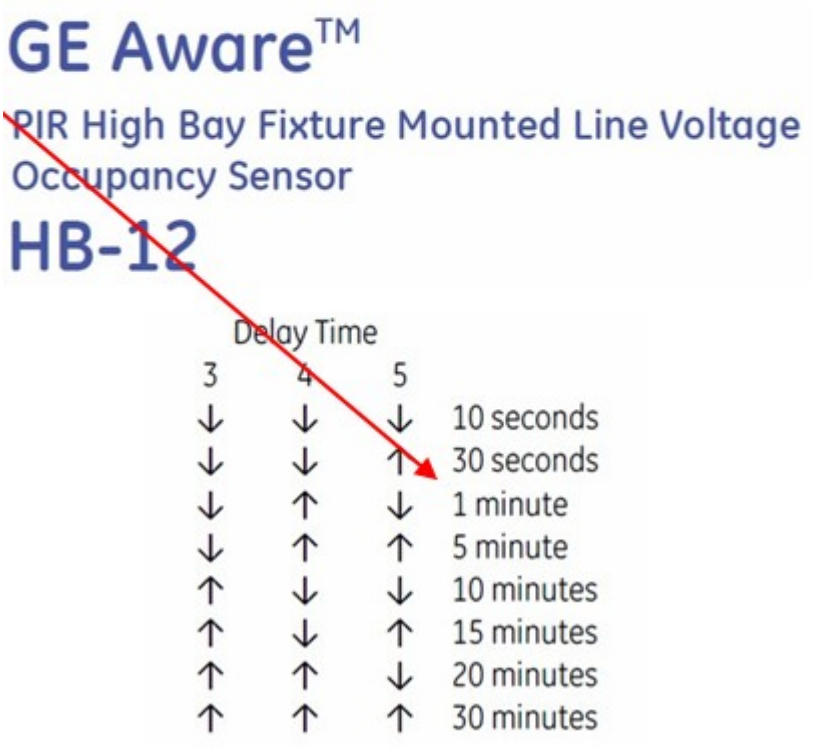

Element 6:

said transfer is effected in response to a luminosity reading and/or a usage time measurement, and

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Element 7:

a luminosity measuring system comprising i) luminosity measuring means,

The HB series sensor is a fixture mount, line voltage, Passive Infrared (PIR) motion sensing lighting control, used for energy savings and convenience. (-D model), daylight harvesting model. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Daylight Feature
The daylight feature (-D models) can provide additional energy savings for facilities with windows or skylights. For -SR-D models, the lights will remain off (or turn off if already on) if the photocell measures sufficient at the floor. The lights will turn back on when the light level reaches the minimum setpoint. For the -DR-D models, the daylight feature will prevent both

Element 8:

ii) one or more test light emitting diodes

The test LEDs are members of the illumination groups (Claim 15). In an area with no natural lighting, the ambient light sensor measures only the light from the LEDs. In an area with ambient light, the sensor measures the ambient light and the contribution of light from the LEDs

Supporting Evidence:



Element 9:

said luminosity measuring means being able to provide said luminosity reading at predetermined time intervals,

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Element 10:

on the basis of the light of said one or more test light emitting diodes when said one or more test light emitting diodes are in an energized state,

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight

control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Element 11:

wherein said one or more test light emitting diodes are selected from among light emitting diodes

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Element 12:

which are part of said illumination groups and

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Element 13:

which are separate from said illumination groups.

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Controls

- Motion and Daylight sensor can be combined for additional energy savings.



GE Aware™

PIR High Bay Fixture Mounted Line Voltage Occupancy Sensor

HB-12

Daylight Feature

The daylight feature (-D models) can provide additional energy savings for facilities with windows or skylights. For -SR-D models, the lights will remain off (or turn off if already on) if the photocell measures sufficient at the floor. The lights will turn back on when the light level reaches the minimum setpoint. For the -DR-D models, the daylight feature will prevent both

Element 14:

transferring an appropriate number of illumination groups between said energized light emitting state and said non-energized state, whereby

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Controls

- Motion and Daylight sensor can be combined for additional energy savings.



GE Aware™

PIR High Bay Fixture Mounted Line Voltage Occupancy Sensor

HB-12

Daylight Feature

The daylight feature (-D models) can provide additional energy savings for facilities with windows or skylights. For -SR-D models, the lights will remain off (or turn off if already on) if the photocell measures sufficient at the floor. The lights will turn back on when the light level reaches the minimum setpoint. For the -DR-D models, the daylight feature will prevent both

Element 15:

for each of said illumination groups

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Controls

- Motion and Daylight sensor can be combined for additional energy savings.



GE Aware™

PIR High Bay Fixture Mounted Line Voltage Occupancy Sensor

HB-12

Daylight Feature

The daylight feature (-D models) can provide additional energy savings for facilities with windows or skylights. For -SR-D models, the lights will remain off (or turn off if already on) if the photocell measures sufficient at the floor. The lights will turn back on when the light level reaches the minimum setpoint. For the -DR-D models, the daylight feature will prevent both

Element 16:

at predetermined time intervals, and

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Controls

- Motion and Daylight sensor can be combined for additional energy savings.



GE Aware™

PIR High Bay Fixture Mounted Line Voltage Occupancy Sensor

HB-12

Daylight Feature

The daylight feature (-D models) can provide additional energy savings for facilities with windows or skylights. For -SR-D models, the lights will remain off (or turn off if already on) if the photocell measures sufficient at the floor. The lights will turn back on when the light level reaches the minimum setpoint. For the -DR-D models, the daylight feature will prevent both

Element 17:

equivalent to the light emitting diodes of said plurality of illumination groups,

GE Aware™ HB-12 lighting control (-D model), the daylight mode and occupancy sensing modes can be used together to maximize savings. When sufficient light is detected, daylight control will turn off (-

SR) or minimize (-DR) light levels regardless of occupancy. When insufficient light is detected, then the sensor will operate like a standard occupancy sensor. (Aware_PIR_High_Bay_DataSheet.pdf)

Supporting Evidence:



Controls

- Motion and Daylight sensor can be combined for additional energy savings.



GE Aware™

PIR High Bay Fixture Mounted Line Voltage Occupancy Sensor

HB-12

Daylight Feature

The daylight feature (-D models) can provide additional energy savings for facilities with windows or skylights. For -SR-D models, the lights will remain off (or turn off if already on) if the photocell measures sufficient at the floor. The lights will turn back on when the light level reaches the minimum setpoint. For the -DR-D models, the daylight feature will prevent both

* * * * *

End of Report

Please rank my report. The following link leads to our profile at ClaimCharts.info, where you could rank our report.
Rank Here

Evaluation Code: MjRAOTVANTZAMjQ=

We are available to answer follow up questions, provide clarifications and search for additional materials upon request. For public contact - please refer to our profile at ClaimCharts.info. For private contact - please call/email us.

Our hourly rate is: $

Non-Disclosure Agreement:

We understand that for the purpose of assisting you in collecting data, you may disclose to us certain confidential information that you want to keep confidential; therefore, for good and valuable consideration, the receipt and sufficiency of which is hereby acknowledged, we agree as follows:

1. For a period of twelve (36) months from the date we receive your confidential information ("Effective Date"), we will not use or disclose the information, except: (a) in the event that such information (i) comes into the public domain not through us; (ii) is already known to us at the time of disclosure; (iii) is lawfully otherwise learnt or independently developed by us; or (iv) is required to be disclosed by law.

2. Since a breach of our obligations hereunder may result in irreparable harm to you, we agree that upon such breach or threat thereof, you shall be entitled to specific performance and other injunctive relief without posting a bond, and in the event of disclosures required by court order, we shall promptly notify you of the proceeding.

3. This agreement supersedes all prior discussions and writings and constitutes the entire agreement between you and us with respect to the subject matter hereof. This Agreement shall be binding upon the successors and assigns of the respective parties, and may not be modified except by an instrument executed by both parties.

Alumage Advisors
Alumage Advisors