

Alumage Advisors ☆☆☆☆☆
HQ: Boston, MA, Offices: San Jose, CA -- Shenzhen, China,
pcraine@alumageadvisors.com,
978-828-5456,
www.alumageadvisors.com,

Report of Evidence of Use

The views presented here are of the author only and do not necessarily reflect the views of others. The author is an independent contractor that acts on behalf of neither the patent owner nor any other third party, including ClaimCharts.info. We would like to thank ClaimCharts.info for introducing to us the opportunity to prepare this report. For comments and questions, please feel free to contact us directly, or via my profile at ClaimCharts.info.

Patent Number: USUS7557524

Claim Number: (1


1. An illumination lighting device comprising a plurality of illumination groups, each of said illumination groups containing one or more light emitting diodes and being configured for passing between an energized light emitting state and a non-energized state, and control means for maintaining the luminosity of the lighting device at a desired level, said luminosity being controlled by, at predetermined time intervals, said transfer is effected in response to a luminosity reading and/or a usage time measurement, and a luminosity measuring system comprising i) luminosity measuring means, ii) one or more test light emitting diodes said luminosity measuring means being able to provide said luminosity reading at predetermined time intervals, on the basis of the light of said one or more test light emitting diodes when said one or more test light emitting diodes are in an energized state, wherein said one or more test light emitting diodes are selected from among light emitting diodes which are part of said illumination groups and which are separate from said illumination groups. transferring an appropriate number of illumination groups between said energized light emitting state and said non-energized state, whereby for each of said illumination groups at predetermined time intervals, and equivalent to the light emitting diodes of said plurality of illumination groups,

Element 1:

1. An illumination lighting device comprising a plurality of illumination groups, each of said illumination groups containing

The High Bay lighting control system combines Dialight's industry leading LED High Bay with a powerful yet simple to use wall controller with a touch screen interface. (Dialight High Bay with Dali Controls March 2014.pdf)

Supporting Evidence:

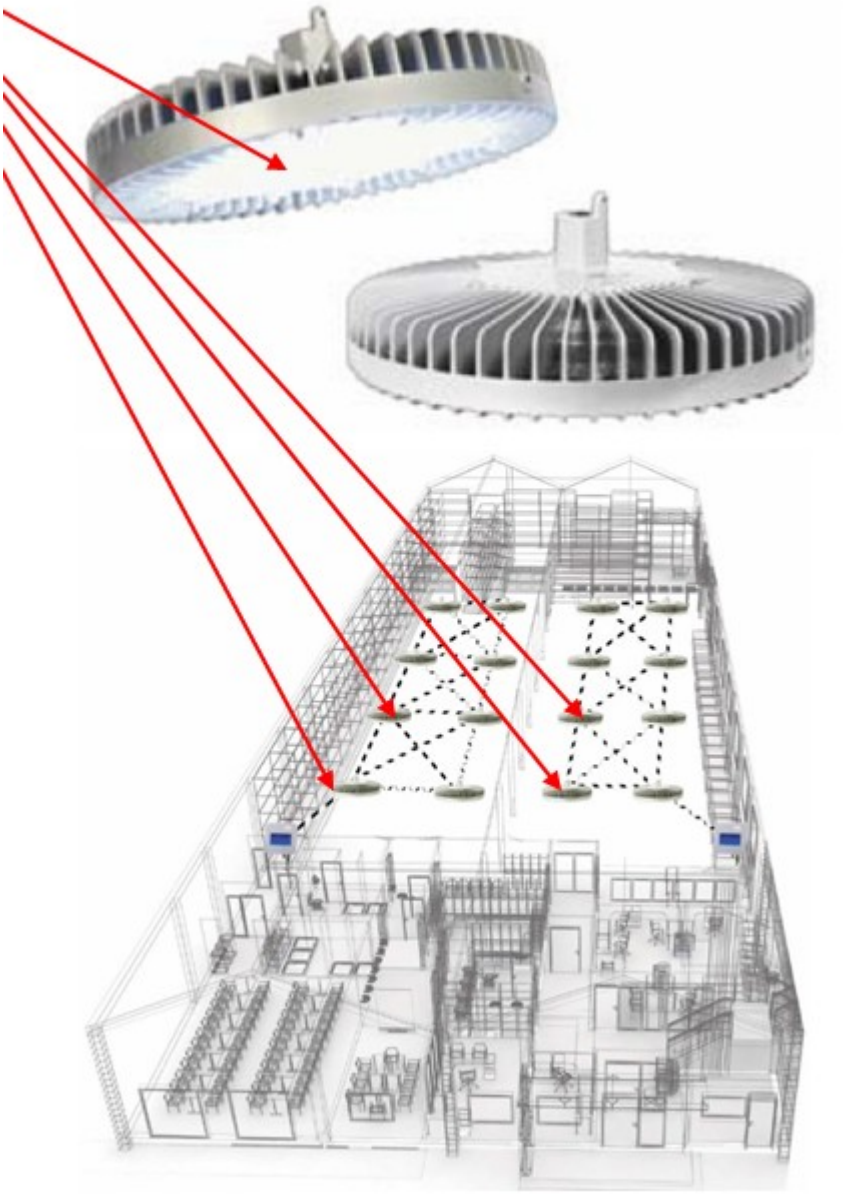


Element 2:

one or more light emitting diodes and

The High Bay lighting control system combines Dialight's industry leading LED High Bay with a powerful yet simple to use wall controller with a touch screen interface. Each installed fixture becomes an illumination group. (Dialight High Bay with Dali Controls March 2014.pdf)

Supporting Evidence:

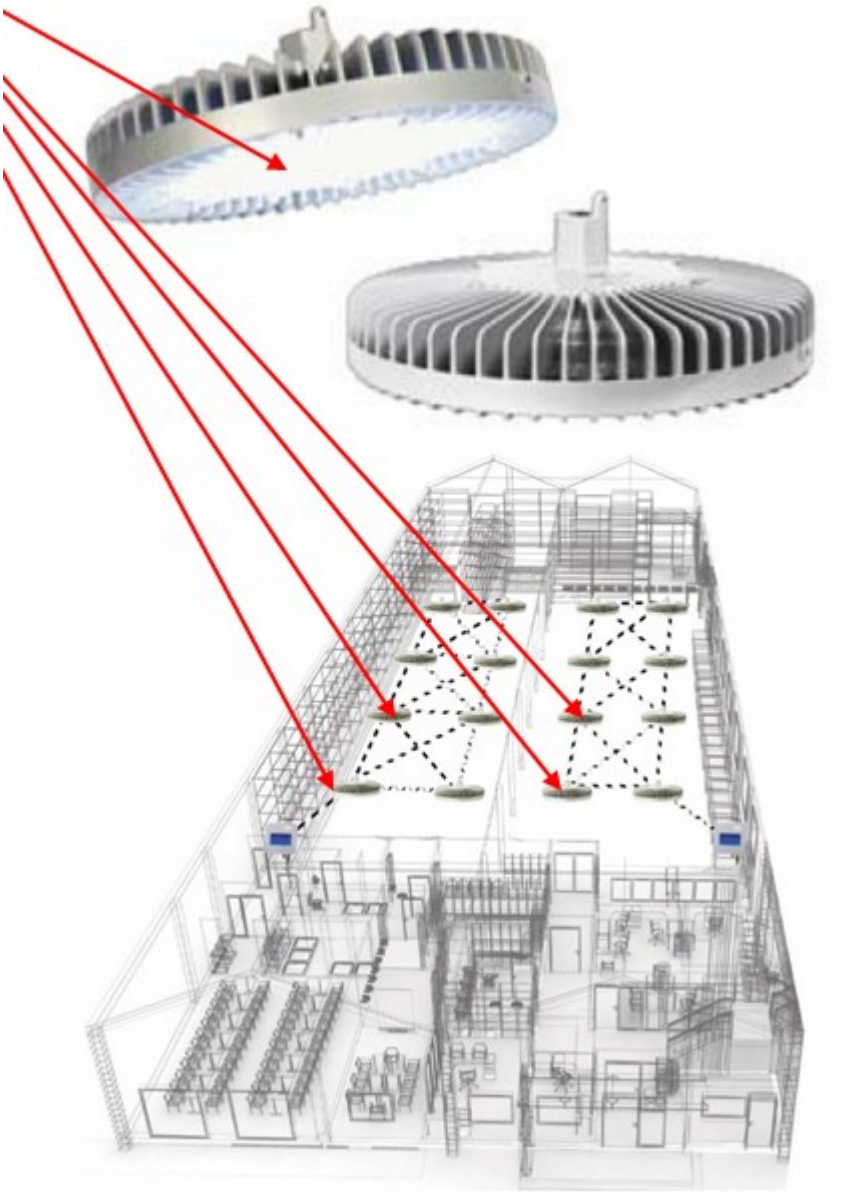

Element 3:

being configured for passing between an energized light emitting state and a non-energized state, and

An ambient light sensor allows for daylight harvesting in areas where

skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor , which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:




Element 4:

control means for maintaining the luminosity of the lighting device at a desired level,

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

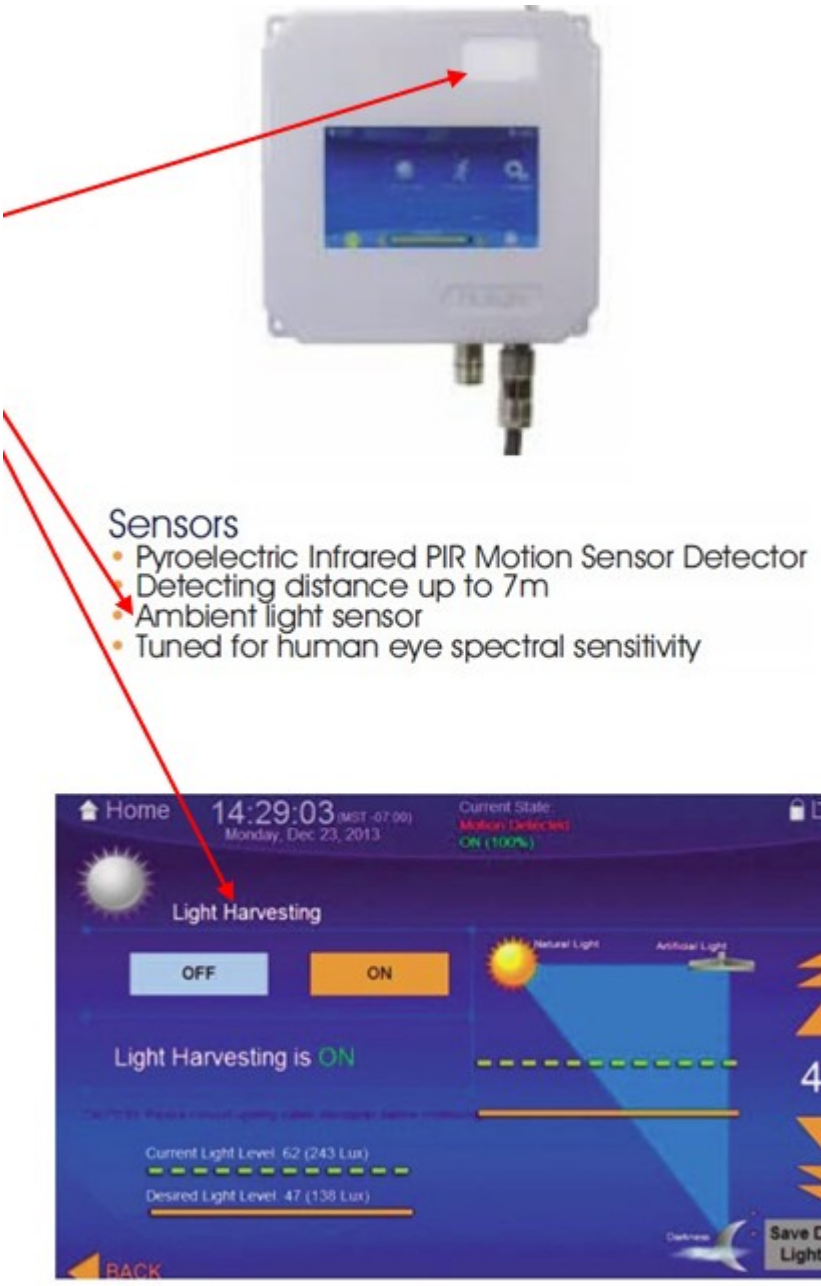

Element 5:

said luminosity being controlled by, at predetermined time intervals,

They are expecting the system to have a delay in reacting to changes in ambient light so the lights cannot be switched on/off by the photocell during transient events such as clouds shadowing the sky lights or windows for a short period of time.

“Yes, I believe and am told from our marketing department it will do what you are asking for.” (Email from Dialight Regional Sales Manager, 8/07/14)

Supporting Evidence:

They are requiring that the control system be able to switch off the SSL fixture when the ambient light reaches a preset point. There are two conditions

1. An occupant enters the room when the lights are off, the ambient is 150% of target. In this case the light should remain off.
2. During room use when the lights are on and the daylight component increases causing the ambient to reach 150% of target. In this case the lights should turn off.

They are expecting the system to have a delay in reacting to changes in ambient light so the lights cannot be switched on/off by the photocell during transient events such as clouds shadowing the sky lights or windows for a short period of time.

"We are in final development and launch of our control unit product. Yes, I believe and am told from our marketing department it will do what you are asking for."

Dialight Corporation
Regional Sales Manager
Solid State Lighting
www.dialight.com

Element 6:

said transfer is effected in response to a luminosity reading and/or a usage time measurement, and

Daylighting systems typically utilize a photocell, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether. During room use when the lights are on and the daylight component increases causing the ambient to reach 150% of target. In this case the lights should turn off (Email from Dialight Regional Sales Manager, 8/07/14)

Supporting Evidence:



Element 7:

a luminosity measuring system comprising i) luminosity measuring means,

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:




Element 8:

ii) one or more test light emitting diodes

The test LEDs are members of the illumination groups (Claim 15). In an area with no natural lighting, the ambient light sensor measures only the light from the LEDs. In an area with ambient light, the sensor measures the ambient light and the contribution of light from the LEDs

Supporting Evidence:

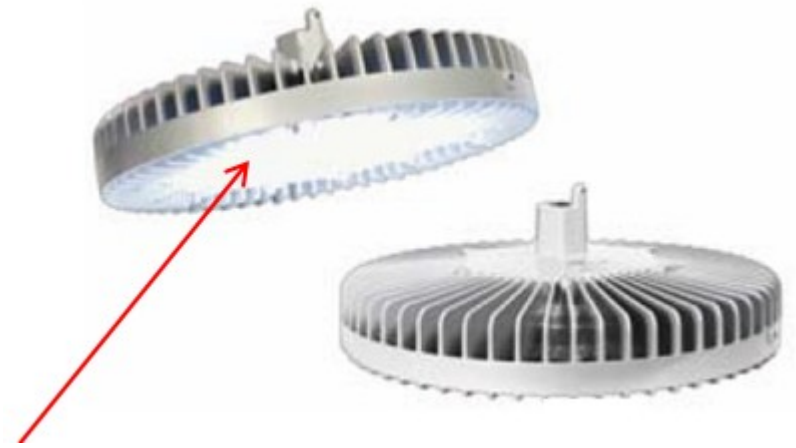


Element 9:

said luminosity measuring means being able to provide said luminosity reading at predetermined time intervals,

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off

altogether.

Supporting Evidence:

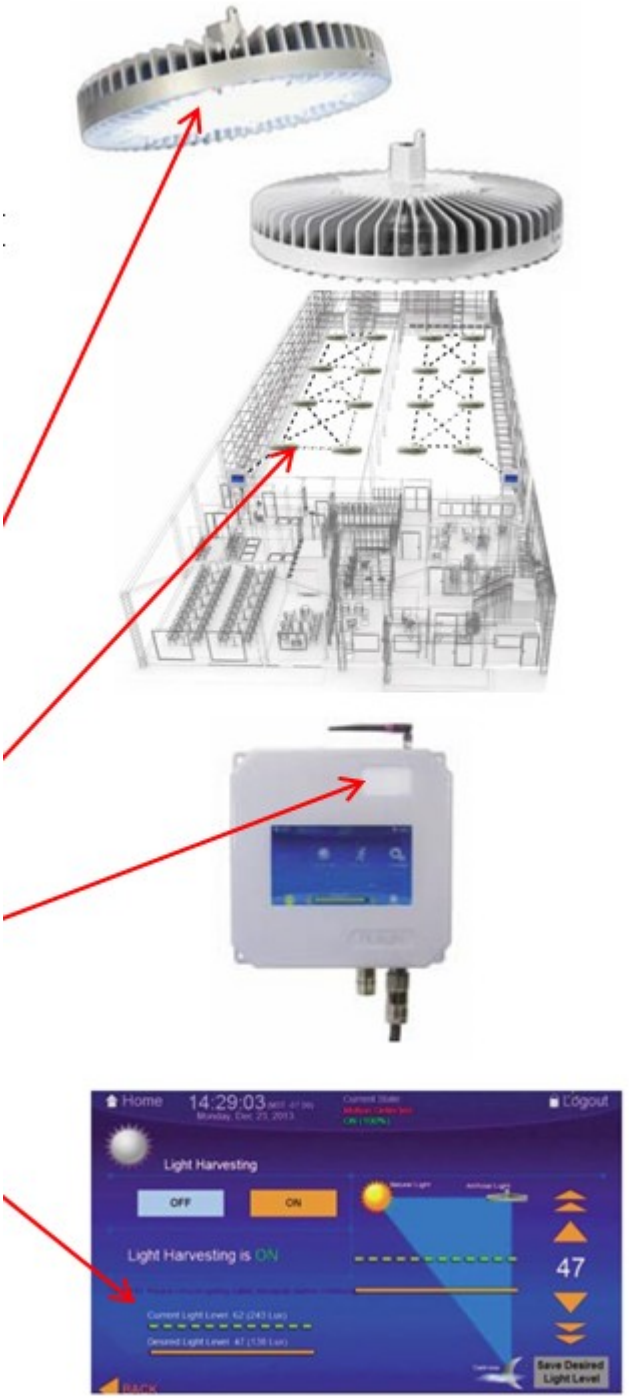



Element 10:

on the basis of the light of said one or more test light emitting diodes when said one or more test light emitting diodes are in an energized state,

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

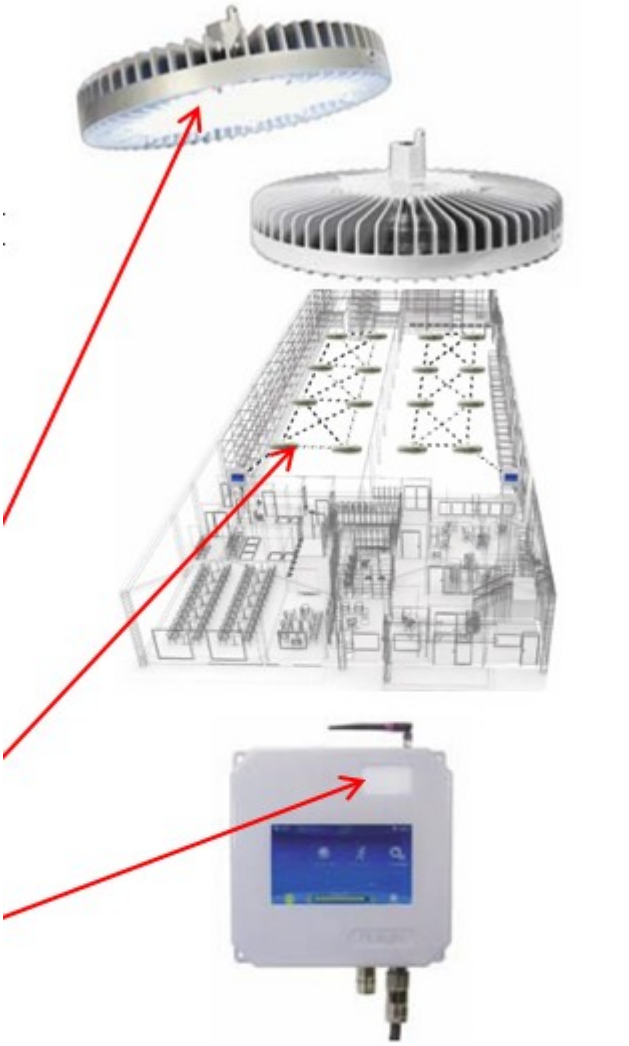

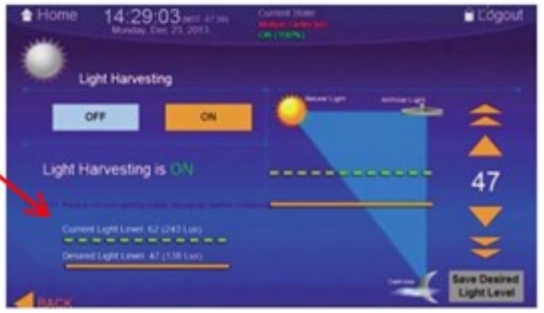



Element 11:

wherein said one or more test light emitting diodes are selected from among light emitting diodes

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

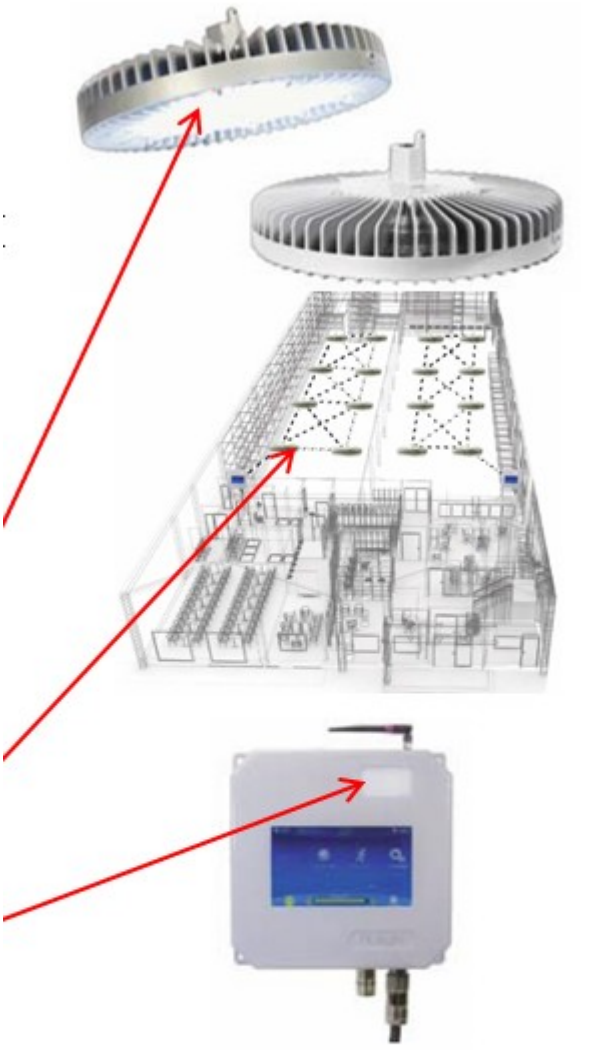

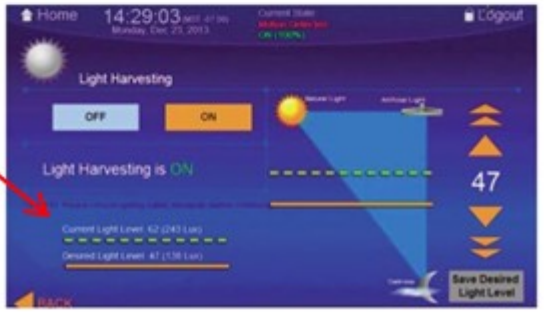



Element 12:

which are part of said illumination groups and

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

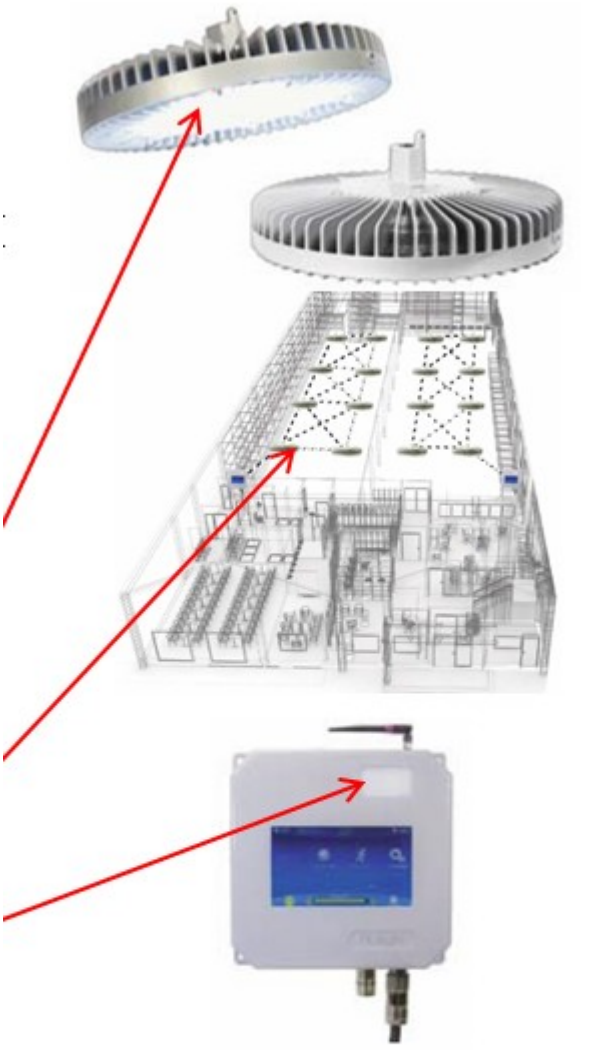

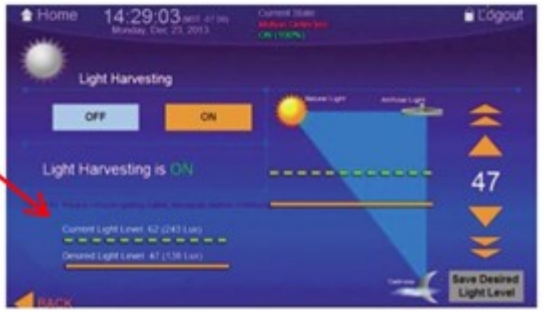



Element 13:

which are separate from said illumination groups.

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

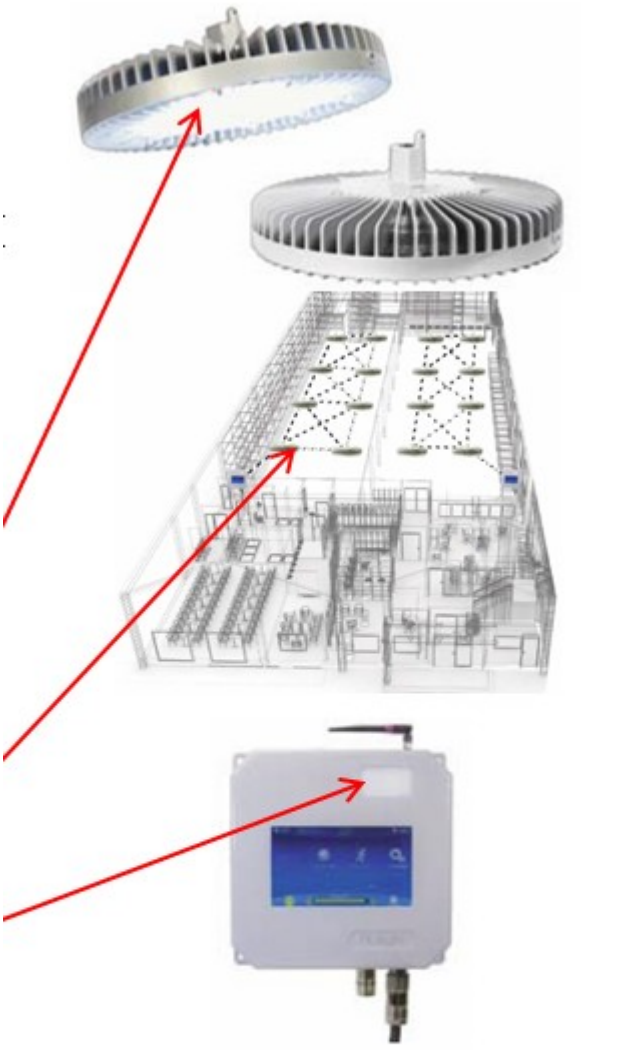

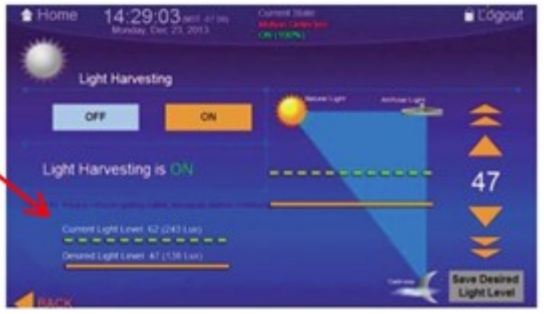



Element 14:

transferring an appropriate number of illumination groups between said energized light emitting state and said non-energized state, whereby

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

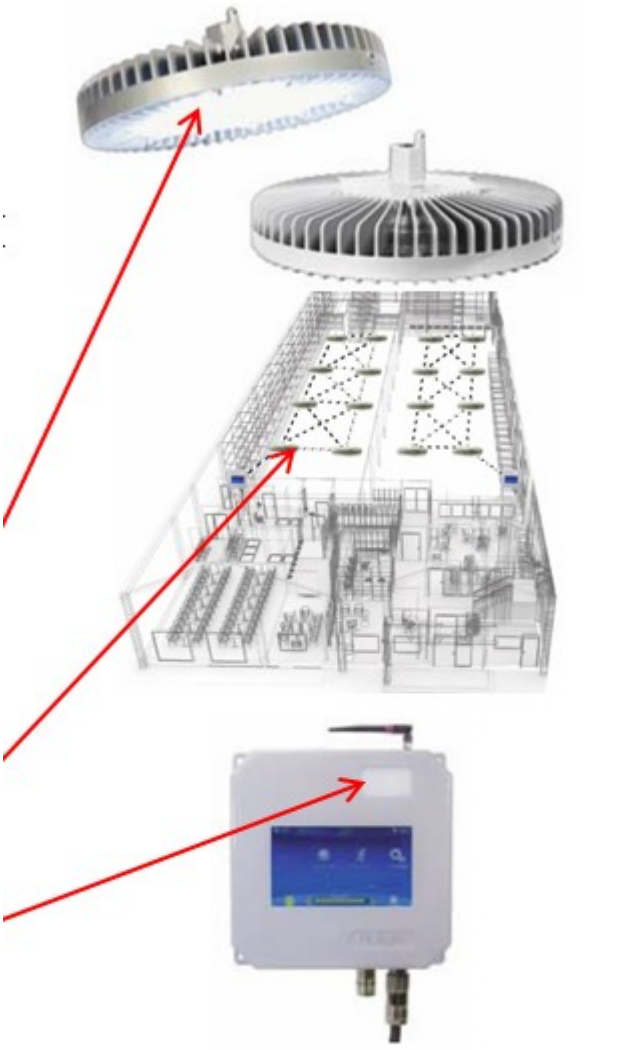

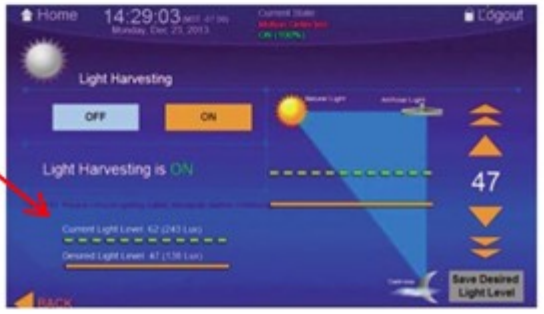



Element 15:

for each of said illumination groups

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

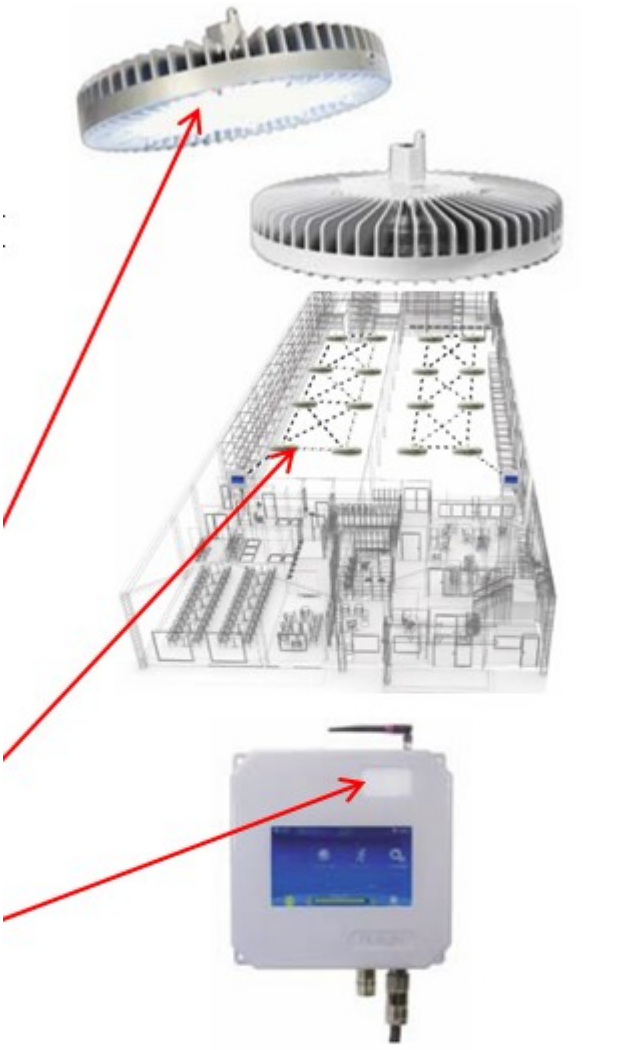

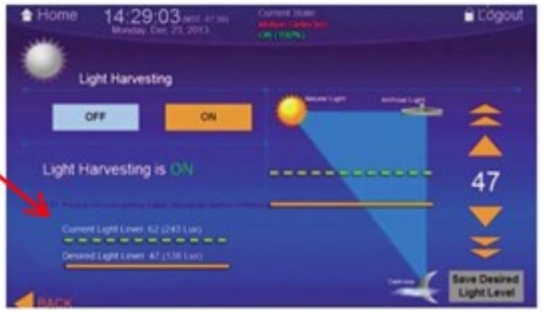



Element 16:

at predetermined time intervals, and

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

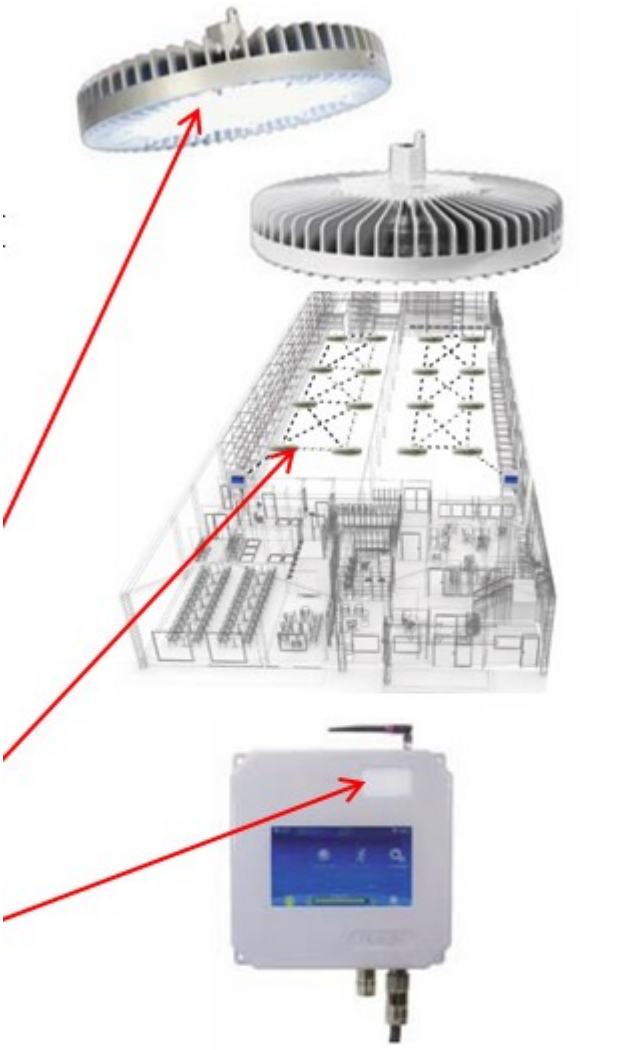

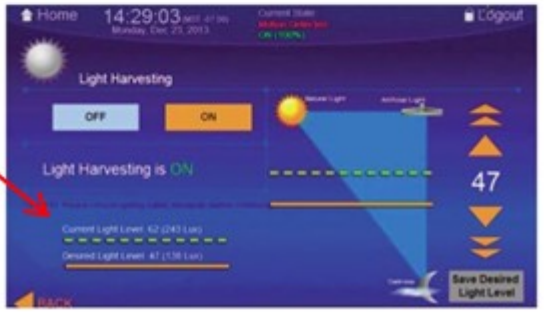



Element 17:

equivalent to the light emitting diodes of said plurality of illumination groups,

An ambient light sensor allows for daylight harvesting in areas where skylights or windows contribute to illumination. Easily control when fixtures turn on, off or dim. (Dialight High Bay with Dali Controls March 2014.pdf) Daylighting systems typically utilize a photocell sensor, which measures ambient light. Based on the reading from the sensor, an algorithm will determine the appropriate level of artificial light, or whether the lights can be turned off altogether.

Supporting Evidence:

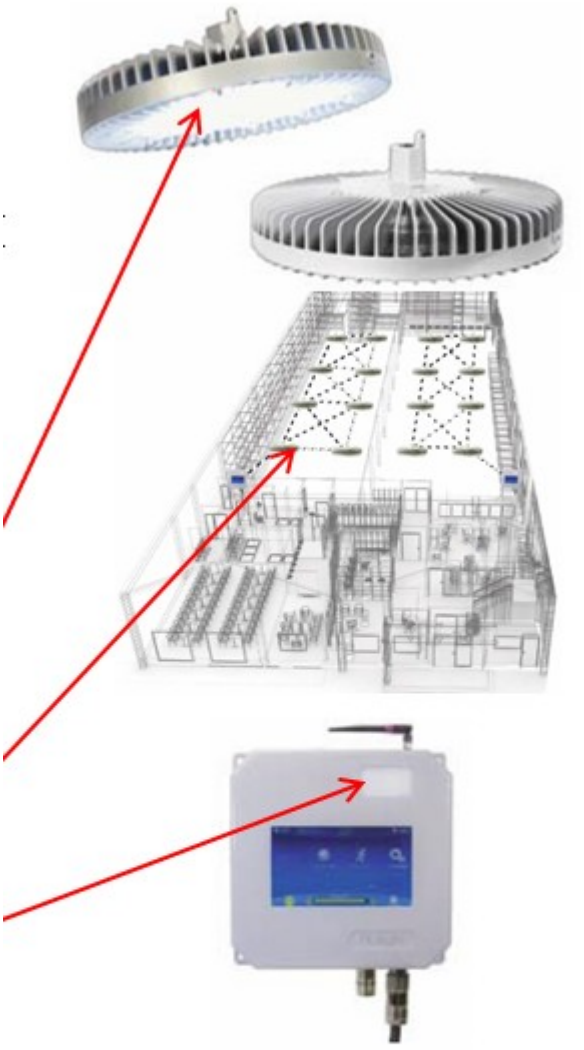

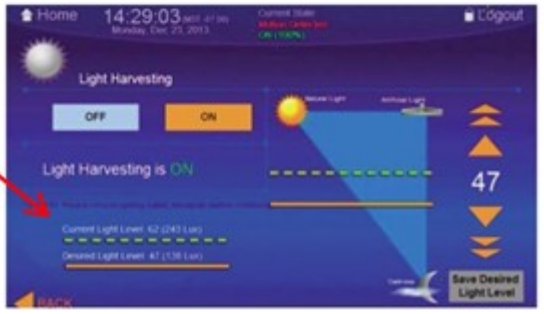

* * * * *

End of Report

Please rank my report. The following link leads to our profile at ClaimCharts.info, where you could rank our report.
Rank Here

Evaluation Code: MjRAOTVANTNAMjM=

We are available to answer follow up questions, provide clarifications and search for additional materials upon request. For public contact - please refer to our profile at ClaimCharts.info. For private contact - please call/email us.

Our hourly rate is: $

Non-Disclosure Agreement:

We understand that for the purpose of assisting you in collecting data, you may disclose to us certain confidential information that you want to keep confidential; therefore, for good and valuable consideration, the receipt and sufficiency of which is hereby acknowledged, we agree as follows:

1. For a period of twelve (36) months from the date we receive your confidential information ("Effective Date"), we will not use or disclose the information, except: (a) in the event that such information (i) comes into the public domain not through us; (ii) is already known to us at the time of disclosure; (iii) is lawfully otherwise learnt or independently developed by us; or (iv) is required to be disclosed by law.

2. Since a breach of our obligations hereunder may result in irreparable harm to you, we agree that upon such breach or threat thereof, you shall be entitled to specific performance and other injunctive relief without posting a bond, and in the event of disclosures required by court order, we shall promptly notify you of the proceeding.

3. This agreement supersedes all prior discussions and writings and constitutes the entire agreement between you and us with respect to the subject matter hereof. This Agreement shall be binding upon the successors and assigns of the respective parties, and may not be modified except by an instrument executed by both parties.

Alumage Advisors
Alumage Advisors