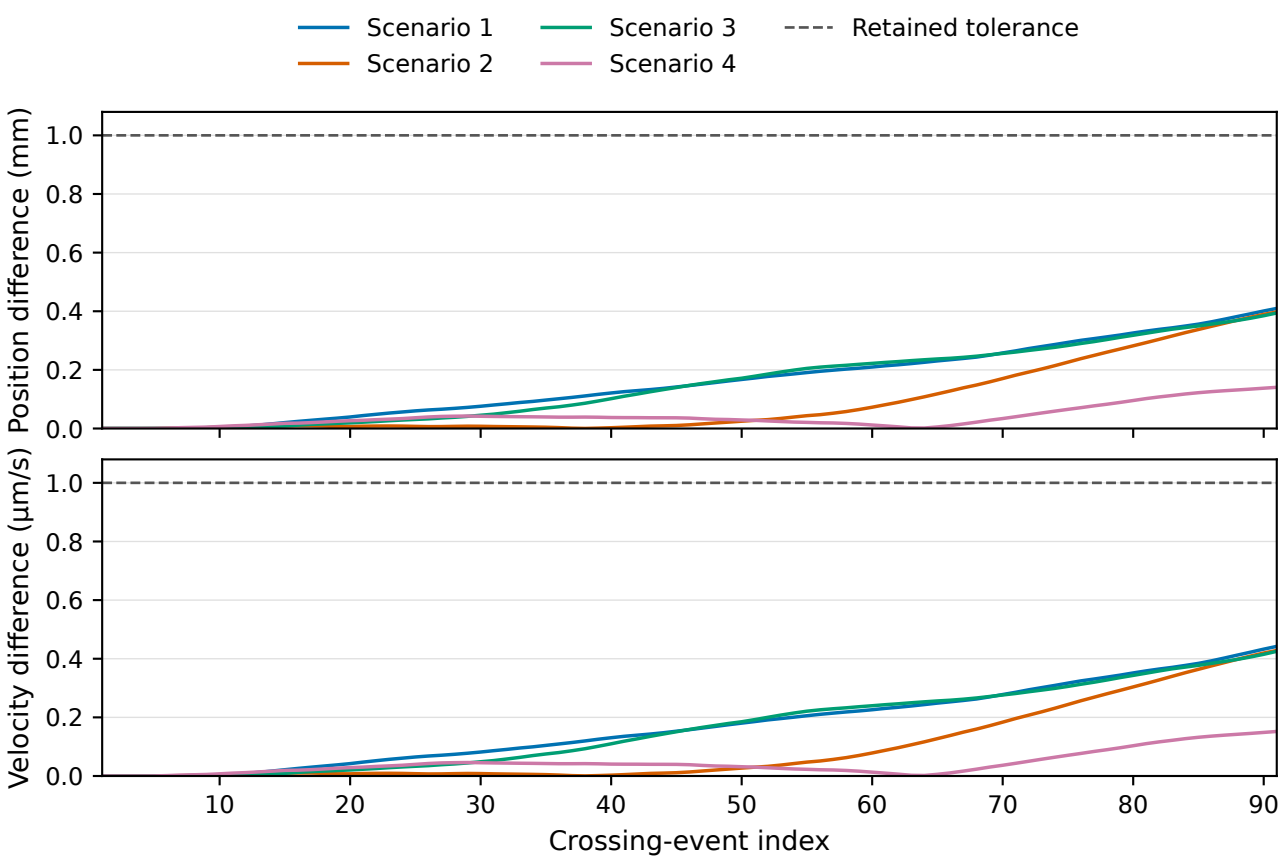
Scenario 1
Scenario 2
Scenario 3
Scenario 4
Retained tolerance
Position difference (mm)
Velocity difference (µm/s)
1.0
0.8
0.6
0.4
0.2
0.0
10
20
30
40
50
60
70
80
90
Crossing-event index