
# Aiphone JP-4HD Sub Master Station

7" touchscreen video sub-station for the Aiphone JP series

STOCK CODE

**94JP-4HD**

**Adds an extra video answering point in another room for an Aiphone JP-series intercom system.**

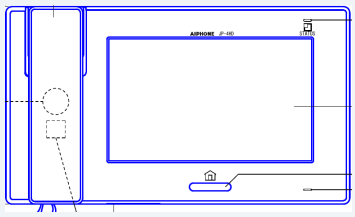

Front view (product drawing)

| 7" | 24 V | CAT5e | 4 |
|---|---|---|---|
| touchscreen | DC power | cabling | door stations |

## BEST FOR

- ✔ Adding a second/third answering point in a home
- ✔ Upstairs, kitchen or bedroom monitor
- ✔ Existing Aiphone JP-4MED systems
- ✔ Users who like a handset or hands-free option
- ✔ Hearing-aid users (T-mode compatible)

## NOT FOR

- ✖ Standalone use — needs a JP-4MED master
- ✖ Non-Aiphone systems
- ✖ Outdoor mounting

## WHY CUSTOMERS CHOOSE IT

- **7" colour touchscreen** with handset + hands-free
- Open doors (up to 4 door stations) from the screen
- Zoom/wide and pan-tilt camera control
- Room-to-room calling between stations
- Option button for gate light / external device

## KEY SPECS

| | |
|---|---|
| Power | **24 VDC from PS-2420 supply · 200 mA max** |
| Display | **7" TFT colour, 1.15 MP** |
| Wiring | **CAT5e straight (non-shielded) to master** |
| Mounting | **Surface wall, 3-gang box** |
| Size / weight | **255 × 145 × 18 mm · 780 g** |
| Operating temp | **0 to +40 °C** |

## FAMILY — PICK THE RIGHT ONE

| | |
|---|---|
| **JP-4MED** | **Master station — required** |
| **JP-4HD** | **Sub master station — this unit** |
| **PS-2420** | **24 V power supply** |

## COUNTER QUICK ANSWERS

**How many can I add?** Up to 7 sub stations off a master (IDs 2–8).

**Cable?** CAT5e straight, non-shielded — not coax or twisted alarm cable.

**Power?** Needs its own 24 V PS-2420 supply.

Source: Aiphone JP-4HD product drawings & specifications (59626).

Internal counter reference