
DSC TL280E Internet Communicator

IP alarm communicator for PowerSeries Neo

STOCK CODE

22TL280E

Sends alarms to the control room over the internet — no phone line needed.

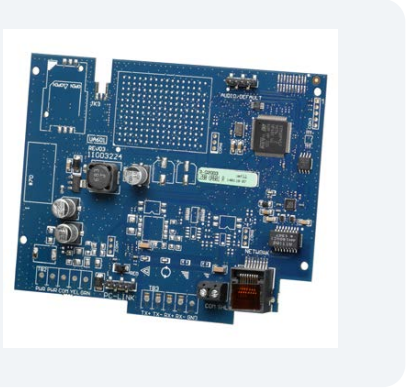

IP	AES	SIA / CID	100 mA
internet path	128-bit	protocols	current draw

WHY CUSTOMERS CHOOSE IT

- **Fully redundant** — report to primary and backup receivers
- **128-bit AES** encrypted signalling
- Supervision heartbeats, full event reporting
- Remote upload/download via the internet
- Plugs straight onto the panel's PC-Link

BEST FOR

- ✔ Neo panels where the phone line is gone
- ✔ Armed-response monitoring over the customer's internet
- ✔ Remote programming with DLS 5
- ✔ Visual verification (with PowerG cameras)

NOT FOR

- ✖ Sites without a reliable internet connection — use a dual-path / cellular model
- ✖ Non-Neo panels (check older PC-series compatibility)

KEY SPECS

Compatible panels	**HS2016 / HS2032 / HS2064 / HS2128**
Receivers	**Sur-Gard System I-IP to 5**
Current draw	**100 mA**
Size / weight	**150 × 115 mm · 310 g**
Operating temp	**5 to 40 °C**

FAMILY — PICK THE RIGHT ONE

TL280E	Internet communicator — **this unit**
TL280RE	Adds RS232 for 3rd-party integration

COUNTER QUICK ANSWERS

Need a phone line? No — it uses the internet connection.

What if the internet goes down? Use a dual-path model (IP + cellular) for backup.

Photos from camera PIRs? Yes, with an SG-System 5 receiver.

Source: DSC TL280(R)E datasheet (PN 30001623R001).

Internal counter reference