



RF Analysis Pipeline — Cross-Signal Summary Dashboard (14 representative files)

Curated subset (not full 33k) — lean export, ~4.7 MB | PSD-based SNR, MAD noise floor, -3 dB BW, segmentation count


SNR (PSD-based, dB)

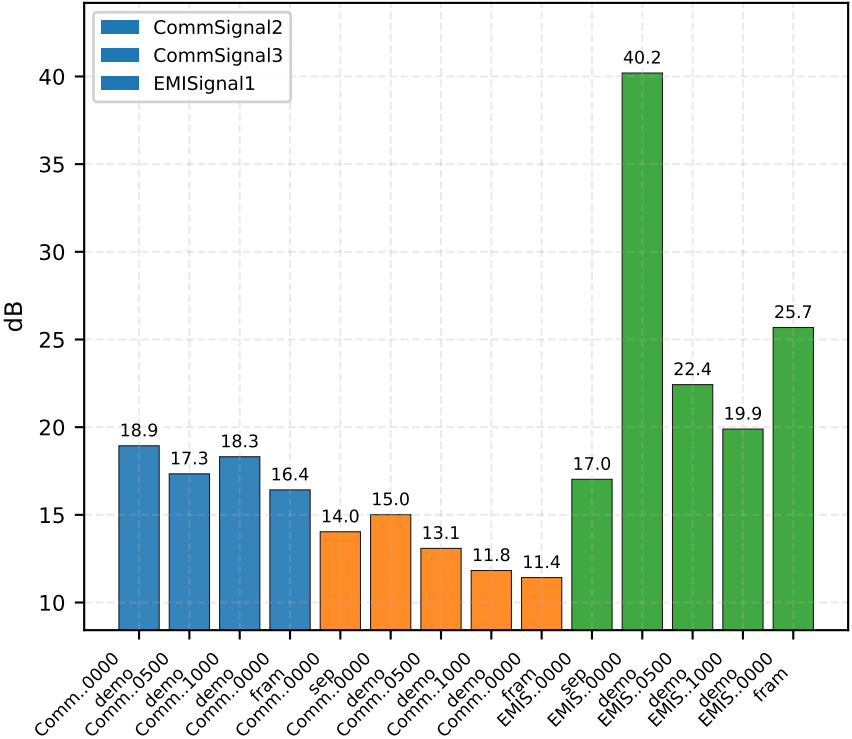


-3 dB Bandwidth (kHz)

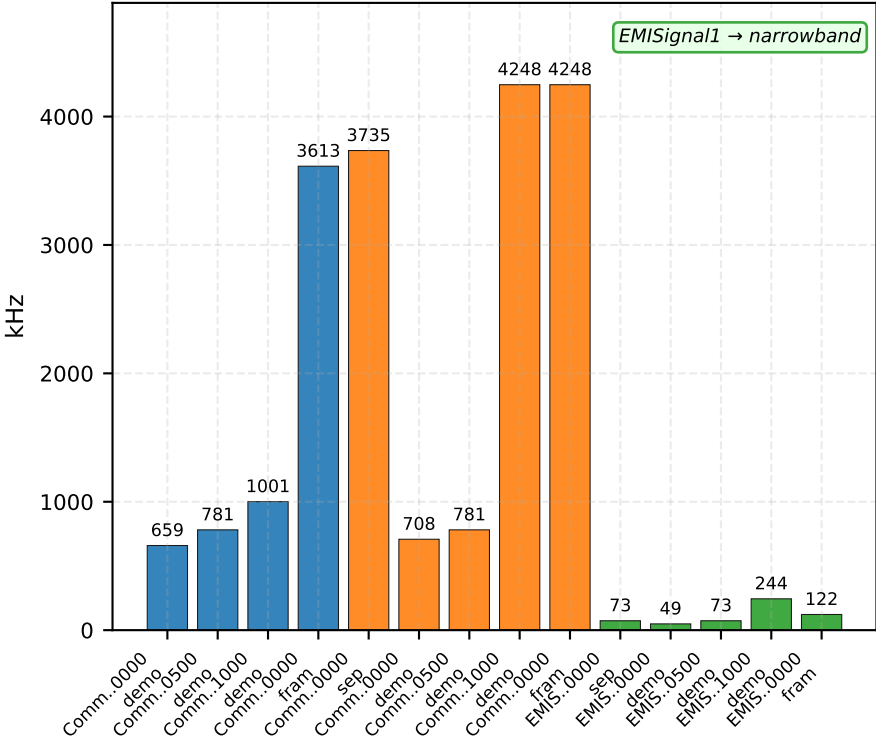


Detected Segments (count)

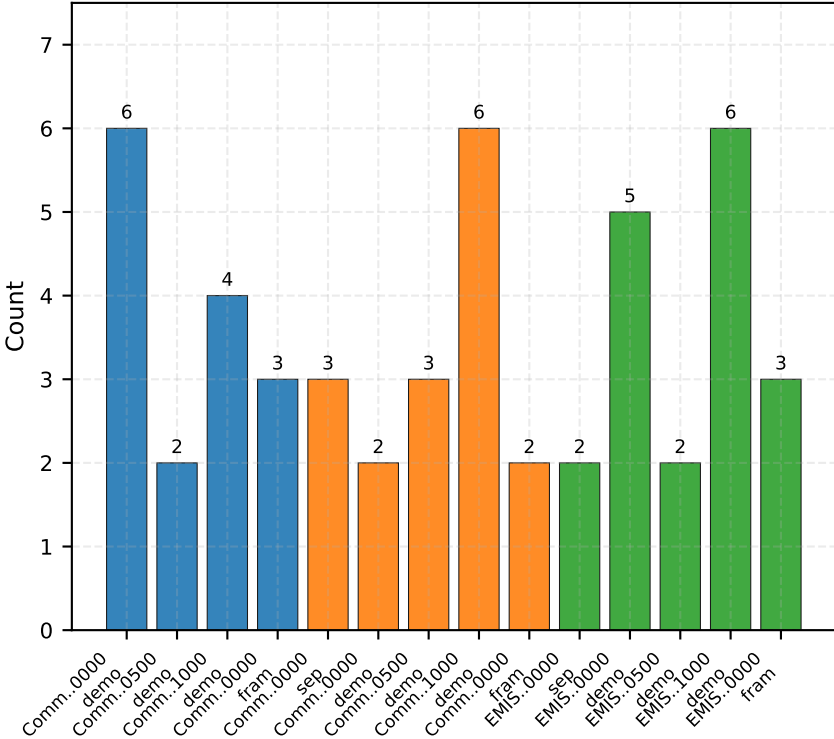

Noise Floor (MAD, dB)

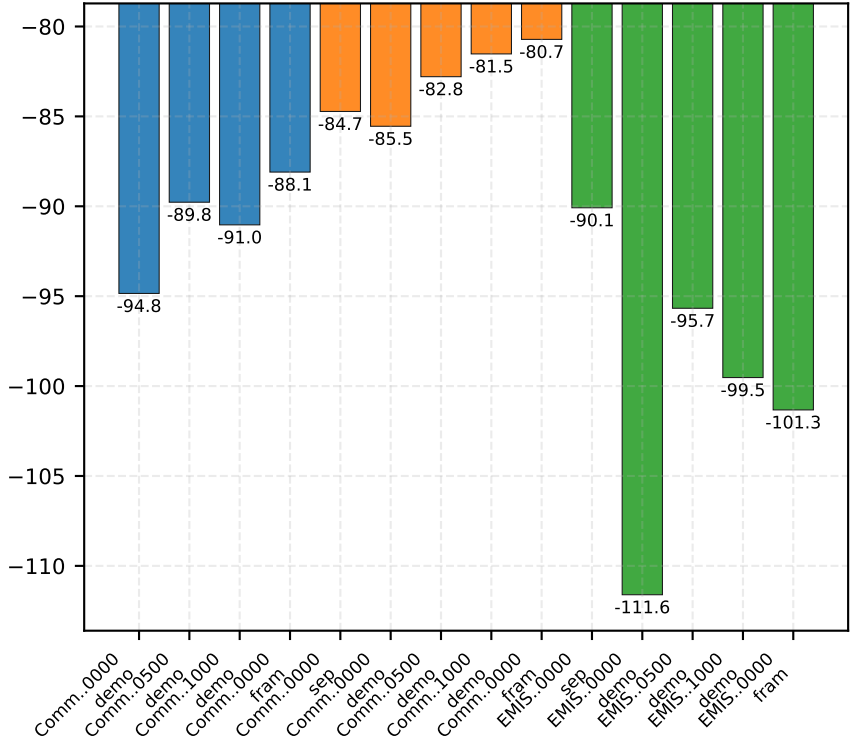

PSD Peak (dB)

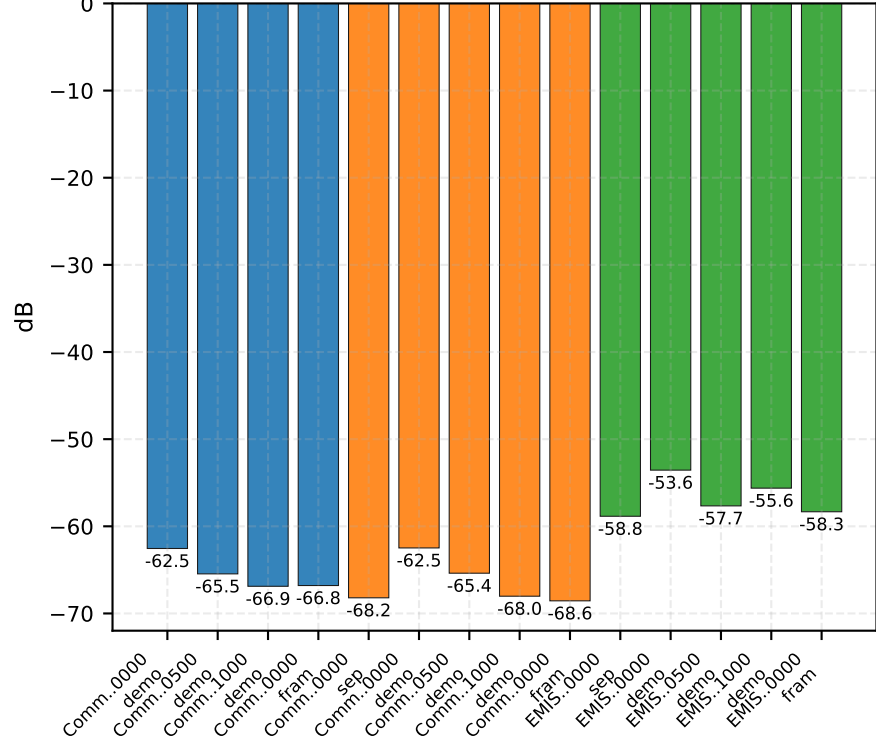

Metrics Table

File	SNR	BW	NF	Segs
Comm_0000	18.9	659	-94.8	6
Comm_0500	17.3	781	-89.8	2
Comm_1000	18.3	1001	-91.0	4
Comm_0000	16.4	3613	-88.1	3
Comm_0000	14.0	3735	-84.7	3
Comm_0000	15.0	708	-85.5	2
Comm_0500	13.1	781	-82.8	3
Comm_1000	11.8	4248	-81.5	6
Comm_0000	11.4	4248	-80.7	2
EMIS_0000	17.0	73	-90.1	2
EMIS_0000	40.2	49	-111.6	5
EMIS_0500	22.4	73	-95.7	2
EMIS_1000	19.9	244	-99.5	6
EMIS_0000	25.7	122	-101.3	3

Insights: • EMISignal1 = high SNR, low BW, very low NF
• CommSignal3 = widest BW (fragile)
• Frame captures = longer, similar stats