
DRONE REMOTE ID SCANNER


Rev A — USB-powered development-board prototype

01 RECEIVER / MCU

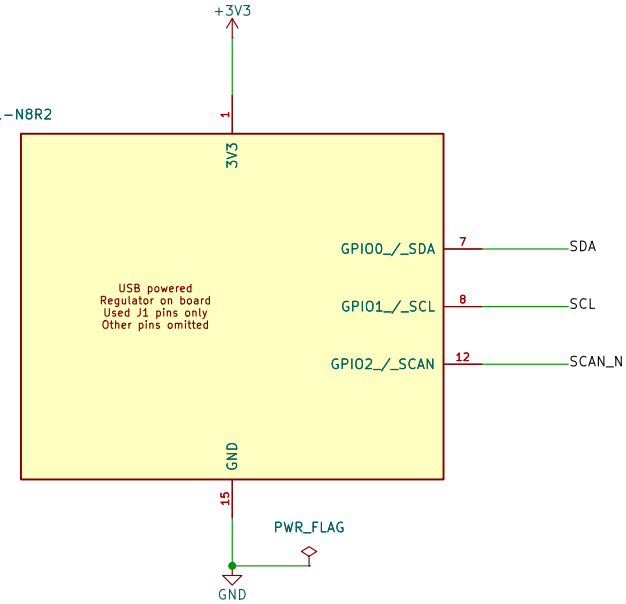


J1 numbers are header positions.
USB powers U1; leave its J5 jumper fitted.
Used pins match DevKit v1.0 and v2.0.

02 DISPLAY

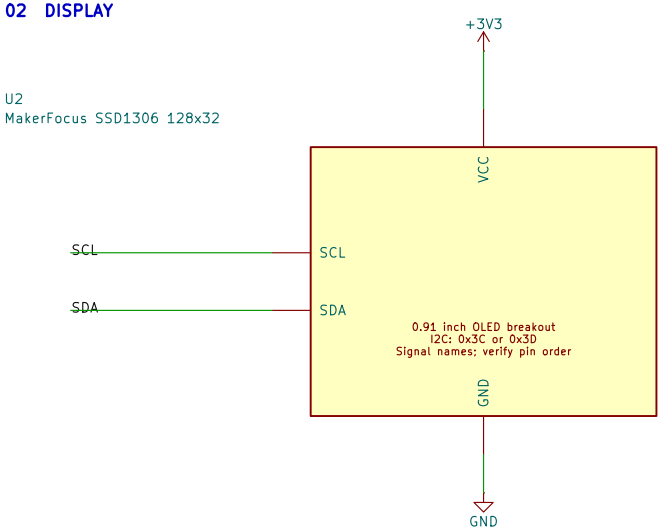

Use the breakout at 3.3 V.
Connect by printed GND / VCC / SCL / SDA.
Symbol pin IDs do not specify physical order.

03 SCAN BUTTON

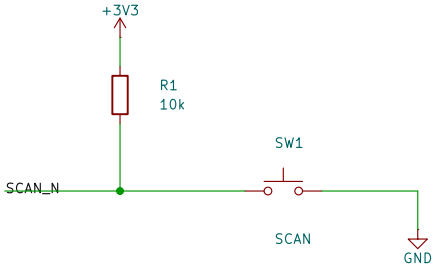

Normally open; press pulls GPIO2 low.
Firmware debounce: 30 ms; one scan per press.

04 OPTIONAL I2C PULL-UPS

R2 / R3: do not populate initially.
Confirm breakout pull-ups before fitting.
Any fitted bus pull-ups must connect to 3.3 V.



U1 shows used J1 pins only; U2 has logical signal pin IDs
USB-powered ESP32-C61 DevKit + OLED breakout; footprints pending

Sheet: /
File: DroneRemoteIDScanner.kicad_sch

Title: Drone Remote ID Scanner — Prototype

Size: A4	Date: 2026-10-13	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1