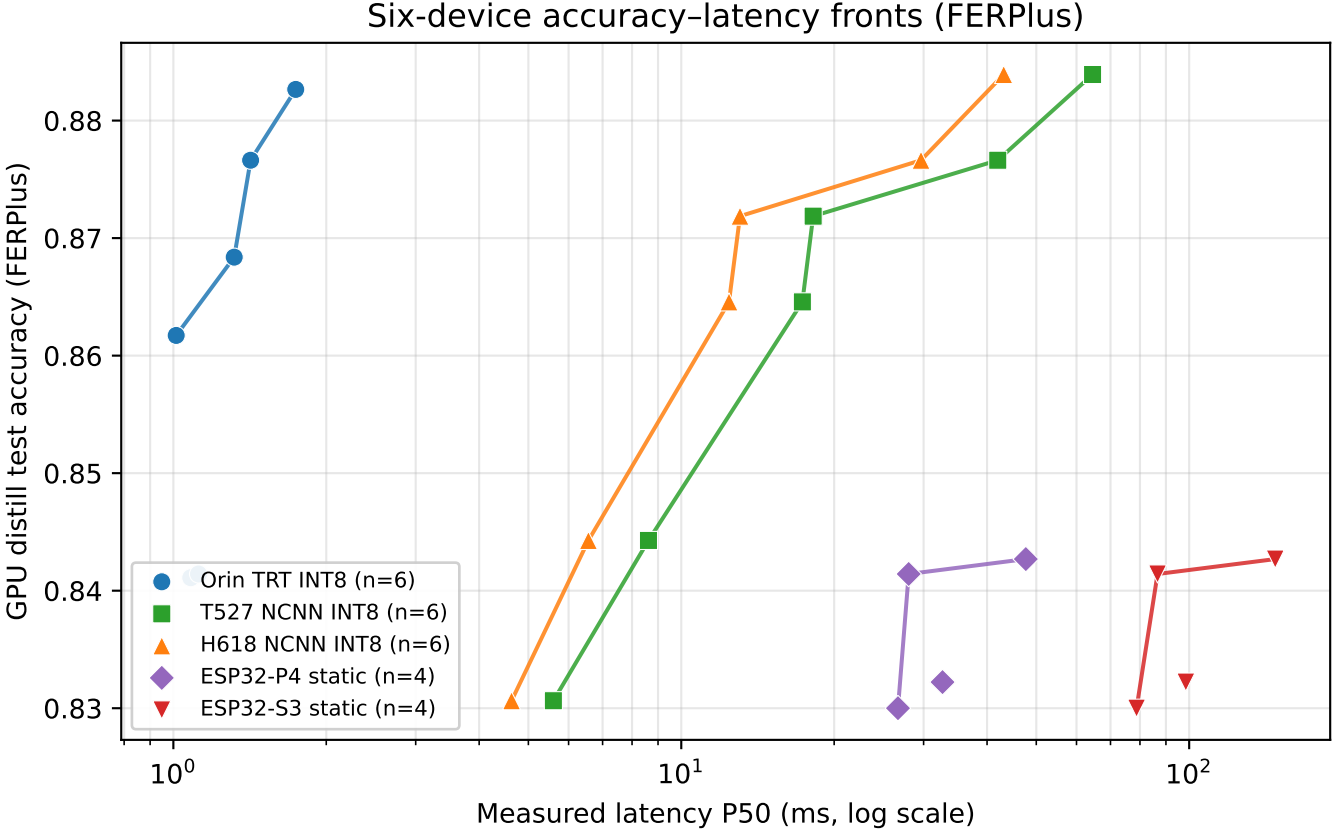
Six-device accuracy–latency fronts (FERPlus)
GPU distill test accuracy (FERPlus)
0.88
0.87
0.86
0.85
0.84
0.83
10^0
10^1
10^2
Measured latency P50 (ms, log scale)
Orin TRT INT8 (n=6)
T527 NCNN INT8 (n=6)
H618 NCNN INT8 (n=6)
ESP32-P4 static (n=4)
ESP32-S3 static (n=4)