

Heaven's Light is Our Guide

Rajshahi University of Engineering and Technology



Department of Mechatronics Engineering

Course Title : CAD Practice
Course Code : ME 2130
Experiment No : 01
Name of Experiment : Introduction to Basic Solid Modeling Techniques for 3D Part Creation
Date of Experiment : 4 July 2026
Date of Submission : 20 July 2026

Submitted By	Submitted To
Name : TASNIMUL HASAN Roll : 2408020 Series : 24	Dr. Dip Kumar Saha Assistant Professor Department of Mechatronics Engineering RUET Md. Faisal Rahman Badal Assistant Professor Department of Mechatronics Engineering RUET

Experiment No: 01

Name of Experiment: Introduction to Basic Solid Modeling Techniques for 3D Part Creation

1.1 Objectives

1. To become familiar with the user interface and basic functionalities of SolidWorks.
2. To learn how to create and fully define 2D sketches using various sketching and dimensioning tools.
3. To understand and apply fundamental 3D modeling features, specifically the Extruded Boss/Base and Revolved Boss/Base tools.
4. To practice creating complete 3D solid parts from given 2D drawings by following a step-by-step modeling process.

1.2 Theory

SolidWorks, by Dassault Systèmes, is a parametric Computer-Aided Design (CAD) software widely used for creating 3D solid models. The foundation of any model is a "fully defined" 2D sketch, where geometry is precisely controlled by dimensions and geometric relations [1]. This parametric approach, starting from a robust sketch, is fundamental to creating modifiable and predictable parts [2].

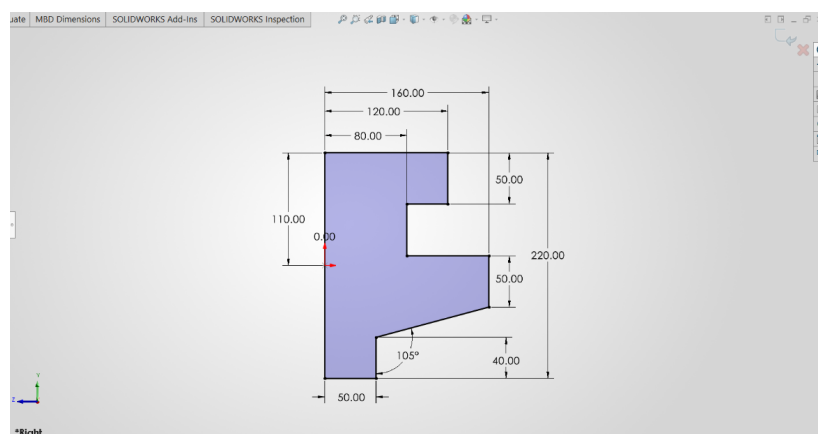


Figure 1.1: An example of a fully defined 2D sketch.

Once a 2D sketch is created, it can be transformed into a 3D part using various features. One of the most fundamental features is the Extruded Boss/Base. This tool adds depth to a selected sketch profile by projecting it linearly for a specified distance [3]. It is the primary method for creating prismatic parts and adding material based on a 2D shape [1].

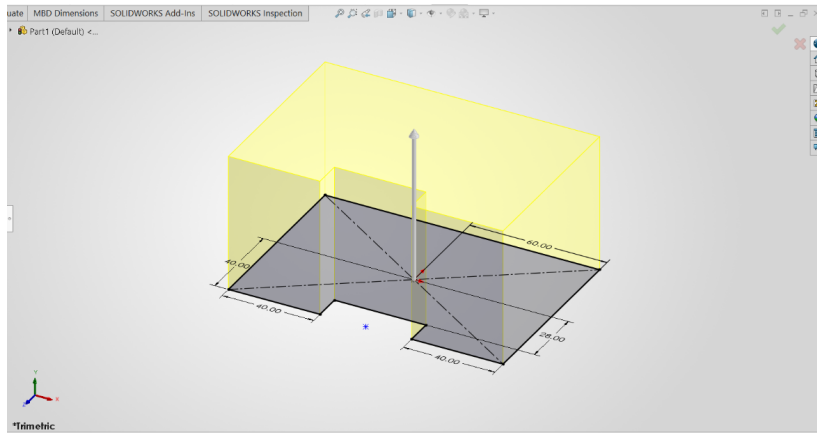


Figure 1.2: Illustration of the Extruded Boss/Base feature.

Another essential feature for creating cylindrical or axisymmetric parts is the Revolved Boss/Base. This tool creates a 3D model by revolving a 2D sketch around a specified centerline or axis [3]. It is highly efficient for modeling objects like wheels, shafts, and other parts with rotational symmetry. The ability to master both extrusion and revolution provides a powerful toolkit for modeling a vast array of mechanical components [2].

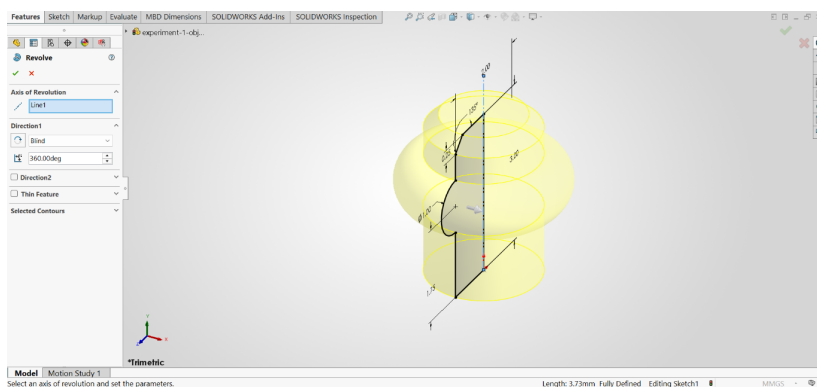


Figure 1.3: Illustration of the Revolved Boss/Base feature.

1.3 Apparatus Required

1. **Hardware:** A personal computer (PC) with hardware specifications sufficient for running SolidWorks smoothly.
2. **Software:** An installed and licensed version of the SolidWorks 3D CAD software by Dassault Systèmes.

1.4 Working

The creation of any 3D part in SolidWorks begins with a systematic workflow. This section outlines the initial steps required to set up the environment and create a basic 2D sketch,

which forms the foundation for 3D features.

1.4.1 Unit System Selection

Upon launching SolidWorks and creating a new part file, the first crucial step is to define the unit system for the model. The dimensions of all sketches and features will be based on this selection. The unit system can be accessed and changed from the bottom-right corner of the status bar. For this lab, the MMGS (millimeter, gram, second) system is used for all models.

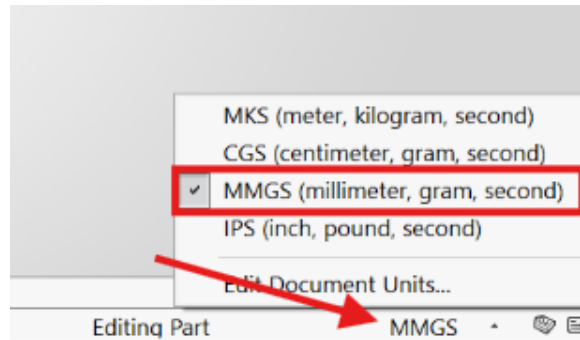


Figure 1.4: Selecting the MMGS unit system from the status bar.

1.4.2 Plane Selection

After setting the unit system, a base plane must be selected to host the initial 2D sketch. SolidWorks provides three default planes: Front, Top, and Right. The choice of plane is important as it determines the orientation of the part. To start a sketch, one must select a plane from the FeatureManager Design Tree or by clicking on it in the graphics area, and then select the Sketch command.

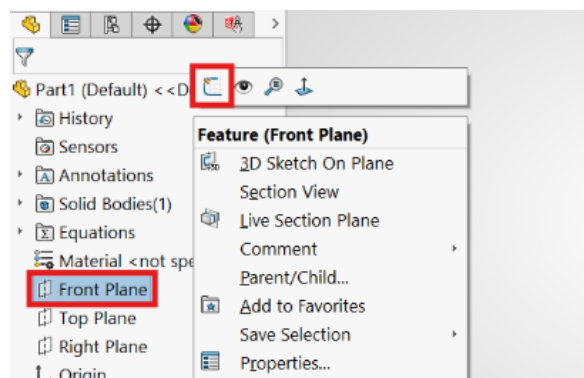



Figure 1.5: Selecting the Front Plane for the initial sketch.

1.4.3 Sketching and Dimensioning

With a plane selected and the sketch mode active, 2D geometry can be created using the tools in the Sketch CommandManager. Tools like Line, Circle, and Rectangle are used to draw the

basic profile of the part.

After creating the geometry, it must be fully defined using dimensions and geometric relations. The Smart Dimension tool is used to add precise dimensional values to the sketch entities. Adding relations like Vertical, Horizontal, or Tangent helps to lock the geometry's position and orientation. A fully defined sketch is indicated by all lines turning black, and the status bar will display "Fully Defined." This ensures that the model is robust and will behave predictably when changes are made.

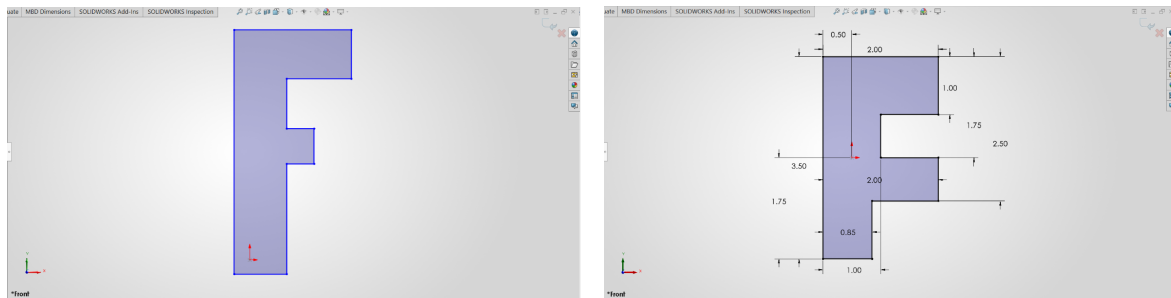

(a) Drawing lines and shapes for the sketch profile. (b) Using Smart Dimension to fully define the sketch.

Figure 1.6: Process of creating and defining a 2D sketch.

1.4.4 Extruded Boss/Base

Once a sketch is fully defined, the Extruded Boss/Base feature is used to convert the 2D profile into a 3D solid. This tool adds material by projecting the sketch perpendicular to the sketch plane for a specified depth. Various end conditions, such as *Blind*, *Through All*, and *Mid Plane*, offer control over the extrusion, making it a versatile tool for creating a wide range of prismatic parts.

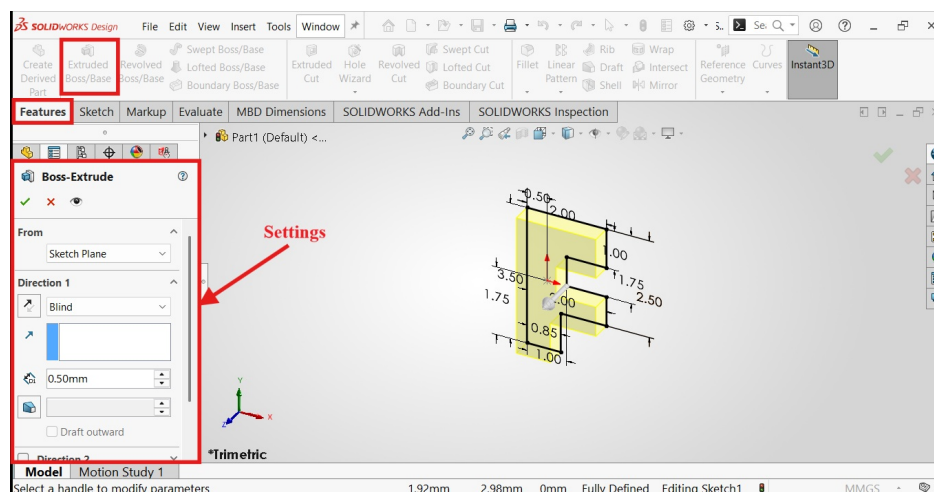


Figure 1.7: Applying the Extruded Boss/Base feature to a 2D sketch.

1.4.5 Revolved Boss/Base

For parts with cylindrical or axisymmetric geometry, the Revolved Boss/Base feature is used. This tool creates a 3D solid by revolving a 2D sketch around a selected centerline or axis. It is highly efficient for modeling objects such as wheels, shafts, and pulleys. The sketch profile defines the cross-section of the revolved part.

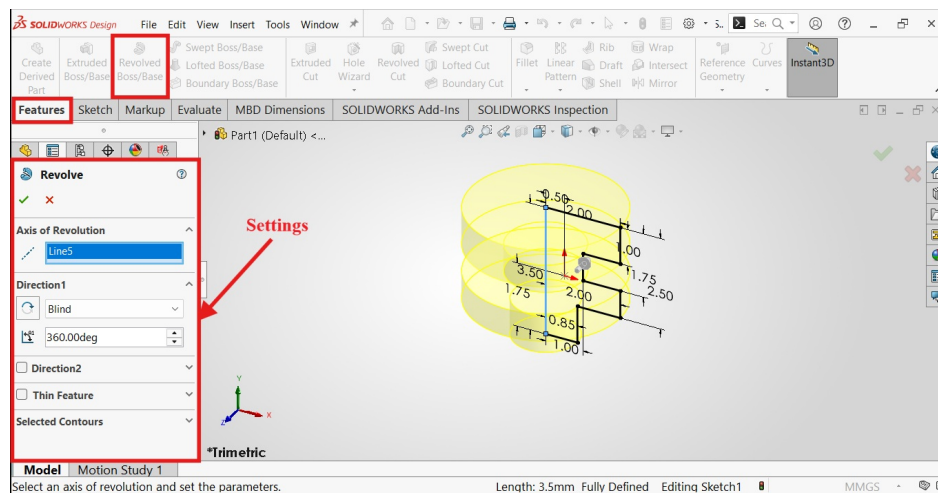


Figure 1.8: Using the Revolved Boss/Base feature with a sketch and centerline.

1.4.6 Fillet Feature

The Fillet feature is an applied feature used to create rounded internal or external faces along one or more edges. Fillets are essential for removing sharp corners, which can help reduce stress concentrations in mechanical parts and improve aesthetics. The feature allows for a constant or variable radius to be applied to the selected edges.


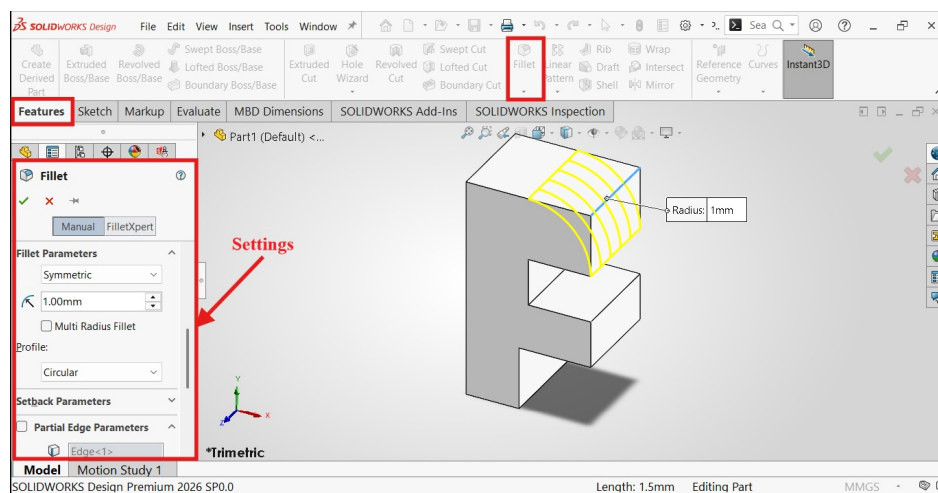



Figure 1.9: Applying a fillet to round sharp edges on a model.

1.5 Object 1


This object was modeled using a straightforward, two-part extrusion process. Initially, the base profile was created as a 2D sketch and fully defined with dimensional constraints. This sketch was then extruded to form the primary block. Subsequently, a second sketch was drawn on the top surface of the base to define the upper tier, which was also extruded to complete the final geometry.

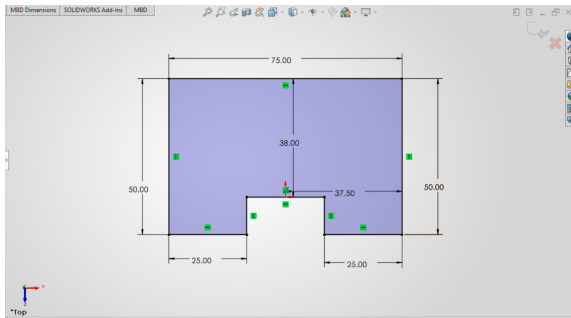


(a) 2D sketch of the base with dimensions

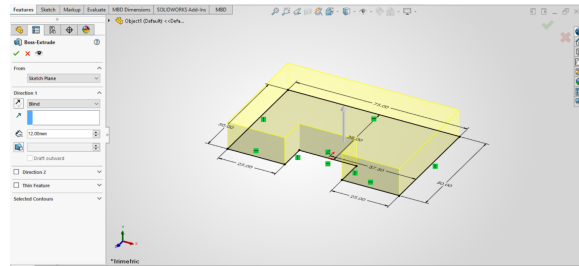


(b) Extruding the base sketch

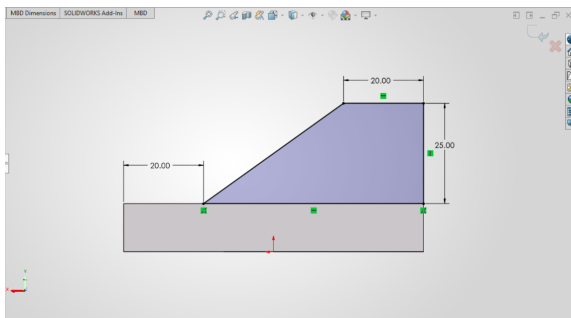

(c) 2D sketch of the top portion with dimensions

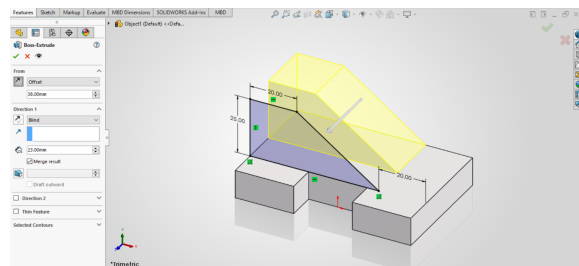

(d) Extruding the top portion

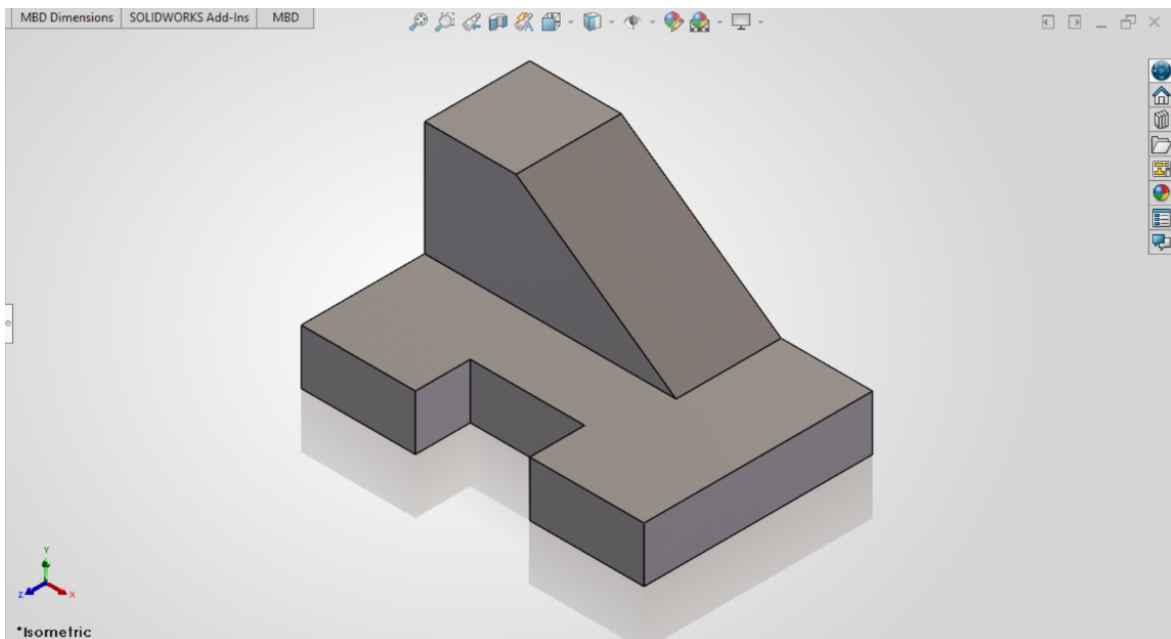


(e) Final result


Figure 1.10: Snapshots while Designing Object 1 in Solidworks

1.6 Object 2


The construction of this object involved multiple features. The process began with a 2D sketch of the main body's profile, which was then extruded symmetrically using the "Mid Plane" end condition. Subsequently, a sketch for the top extension was created and extruded. The final step involved creating a sketch on the bottom face of the model and using the "Extruded Cut" feature to remove material and create the final shape.

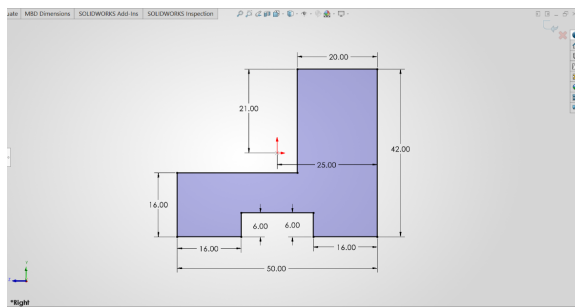


(a) 2D sketch of the main body with dimensions.

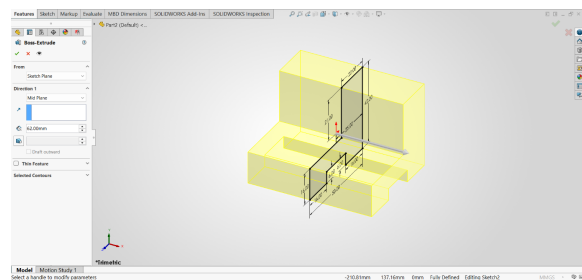


(b) Extruding the sketch from the mid-plane.

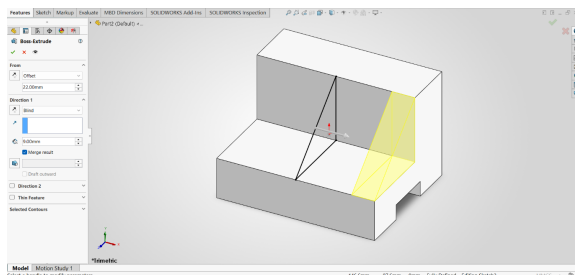

(c) Extruding the top extension.

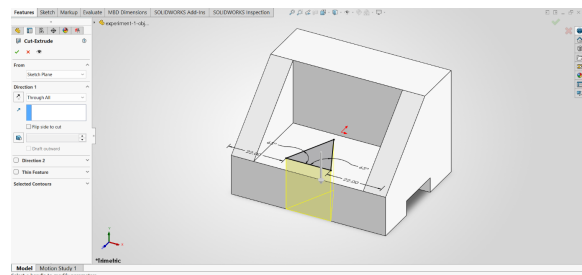

(d) Applying the Extruded Cut feature.

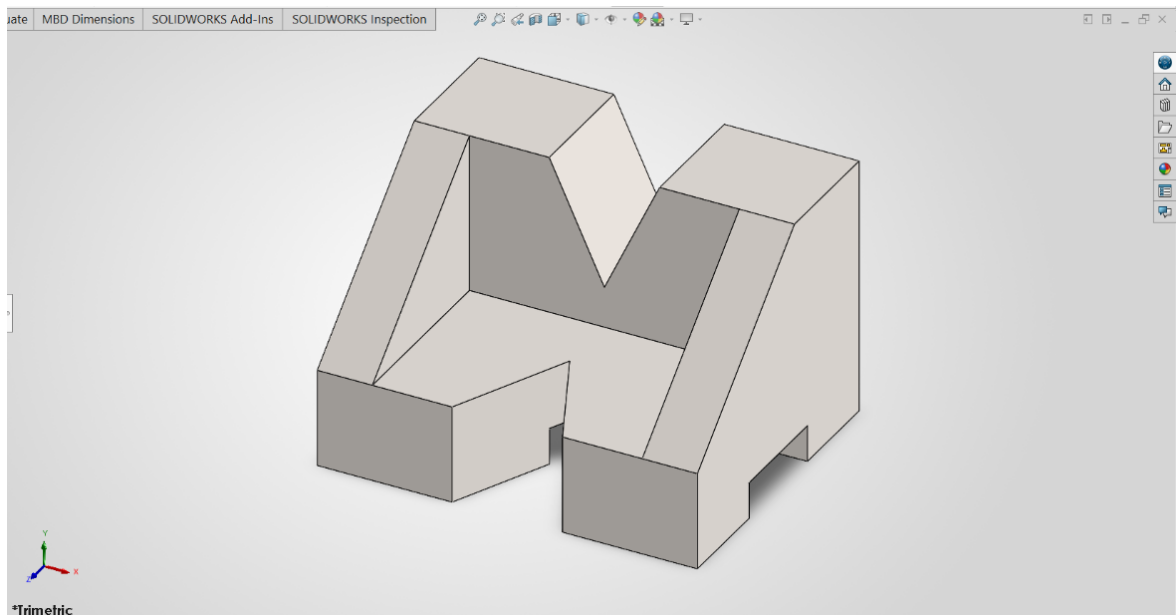


(e) Final Result.


Figure 1.11: Snapshots while Designing Object 2 in Solidworks

1.7 Object 3


This object was created using a combination of additive and subtractive modeling techniques. The process began by sketching and extruding the main base. Following this, the "Extruded Cut" feature was utilized to remove a rectangular section from the center. Finally, two smaller rectangular profiles were sketched on the top surface and extruded upwards to form the corner posts, completing the part's geometry.

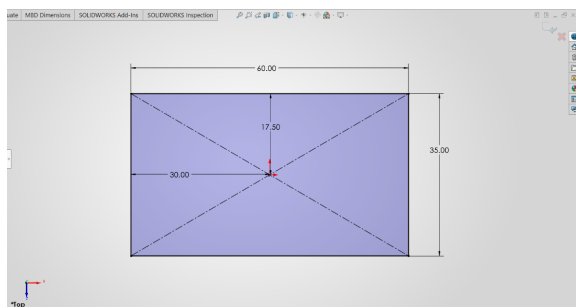


(a) 2D sketch of the base with dimensions.

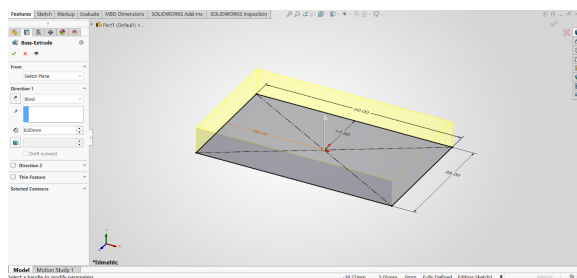


(b) Extruding the base sketch.

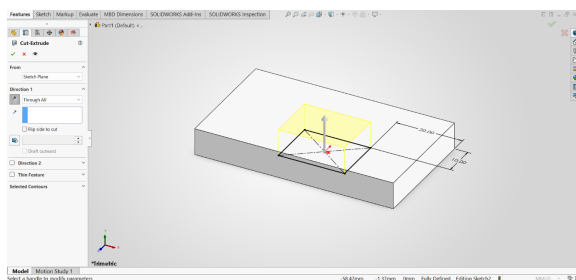

(c) Cutting a rectangle using the Extruded Cut feature.

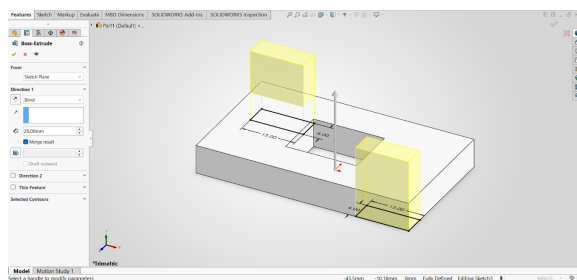

(d) Extruding two rectangles from the corners.

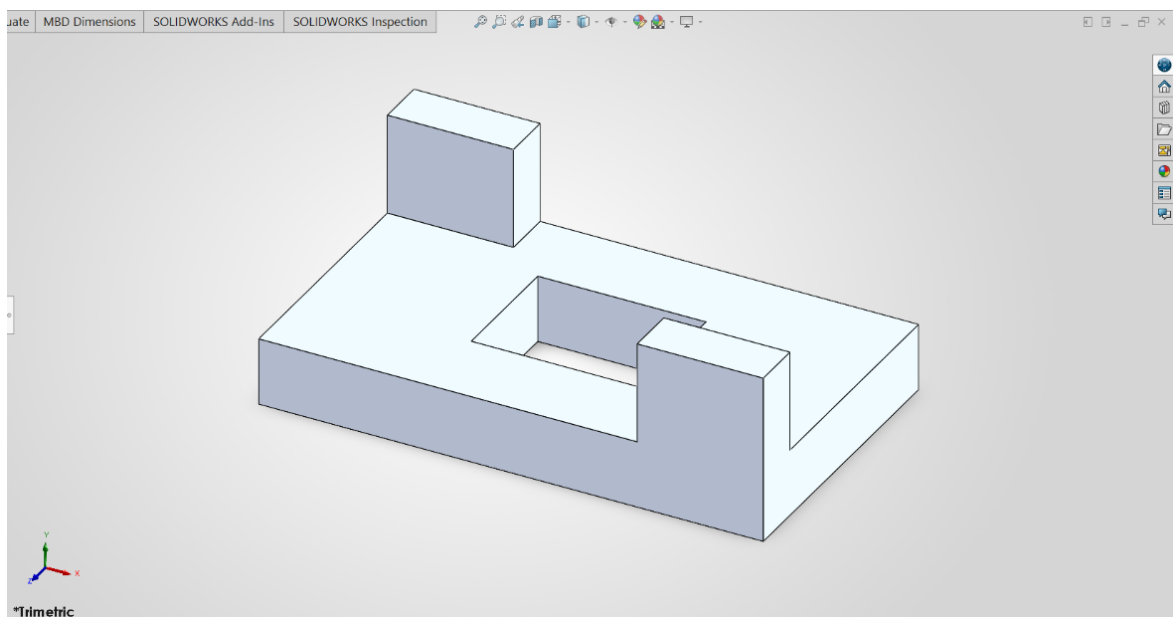


(e) Final Result.


Figure 1.12: Snapshots while Designing Object 3 in Solidworks

1.8 Object 4


This part was constructed using a multi-step process involving both additive and subtractive methods. First, the main rectangular base was created by sketching its profile and applying an Extruded Boss/Base feature. Subsequently, a large angled cut was made using the Extruded Cut tool. A new sketch was then created on the top surface to extrude a central block upwards. The final step involved another Extruded Cut to remove a rectangular section from this newly created block, completing the model.

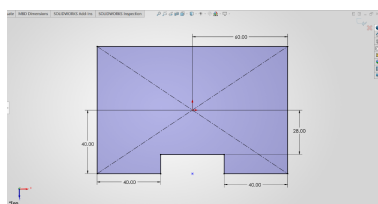


(a) 2D sketch of the base.

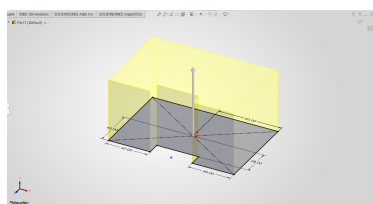


(b) Extruding the base sketch.

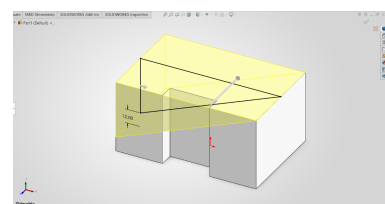


(c) Creating the angled cut.

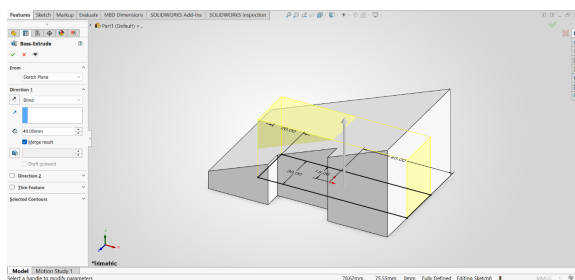

(d) Extruding the central block.

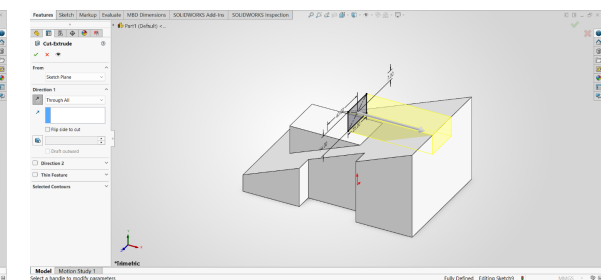

(e) Creating the top cut-out.

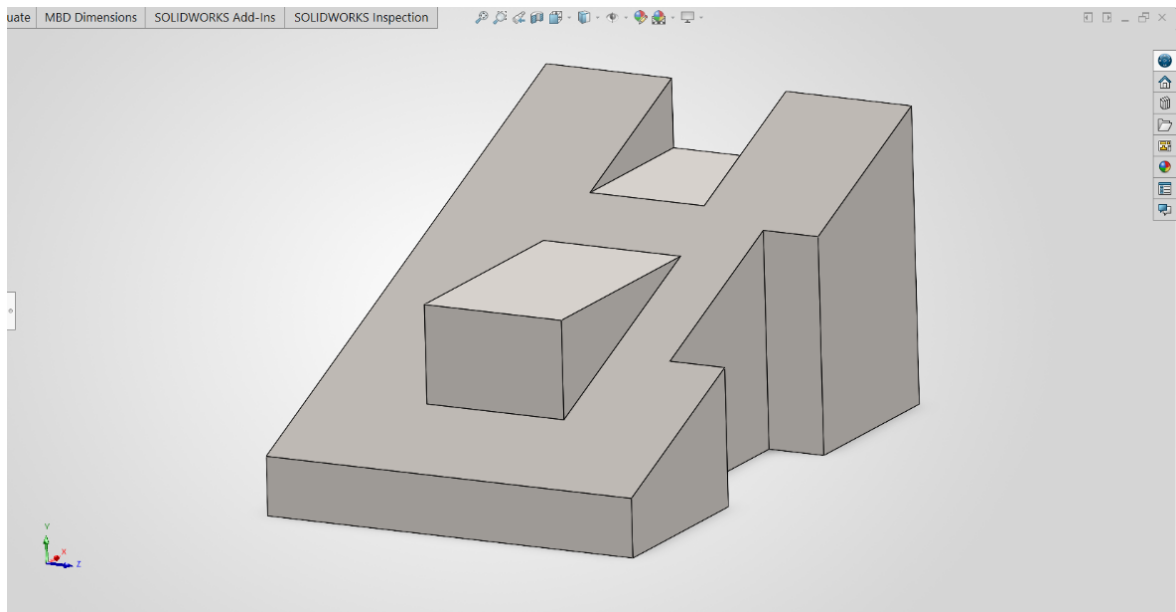


(f) Final result.


Figure 1.13: Snapshots while Designing Object 4 in Solidworks

1.9 Object 5


This part serves as a clear example of rotational modeling. A 2D cross-sectional profile was first sketched and dimensioned. The Revolved Boss/Base feature was then used to sweep this profile 360 degrees around a central axis, creating the complete, solid, axisymmetric geometry in a single step.

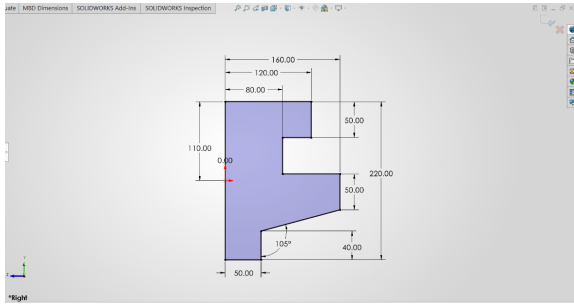

(a) 2D sketch with dimensions.

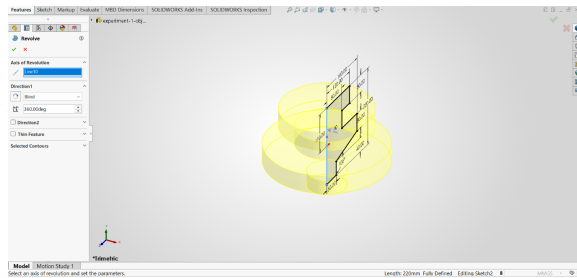

(b) Revolving the sketch.

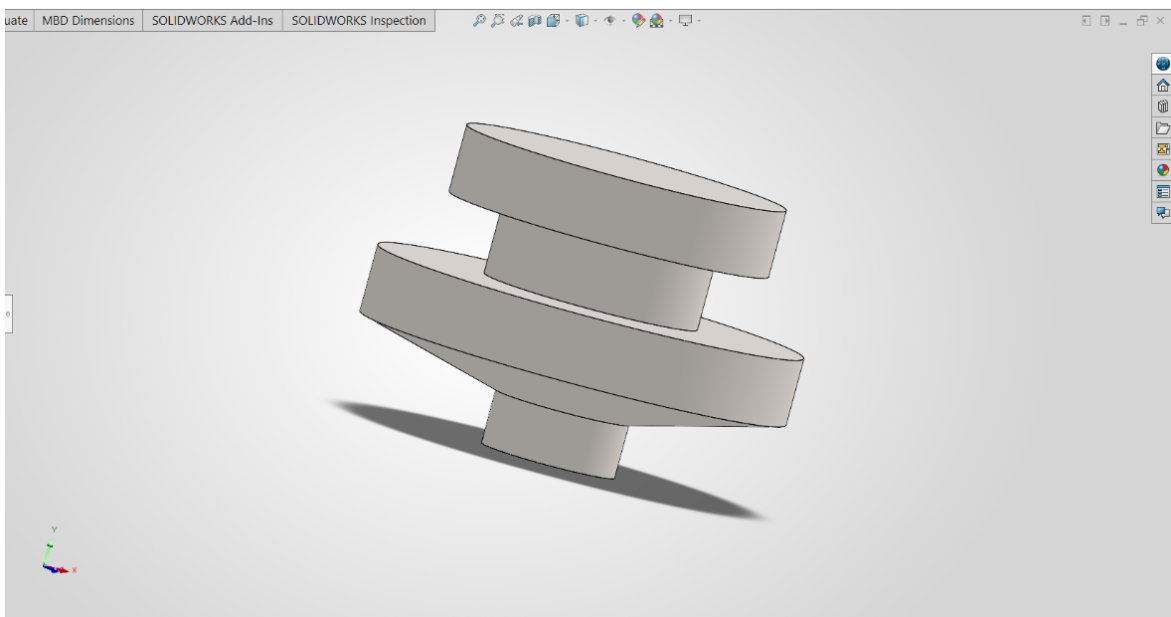


(c) Final Result.


Figure 1.14: Snapshots while Designing Object 5 in Solidworks

1.10 Object 6


This object demonstrates the use of multiple feature types to build a complex part. The process began with creating and extruding the main base. Subsequently, a revolved feature was used to create circular geometry on two diagonal corners. To finalize the part, applied features were used: a Fillet was added to round a top edge, and a Chamfer was applied to create a beveled bottom edge, showcasing how different tools are combined in modeling.

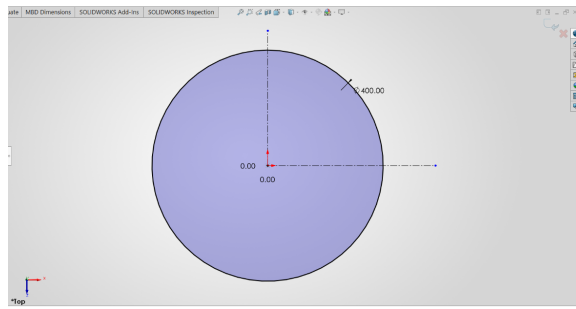


(a) 2D sketch of the base with dimensions.

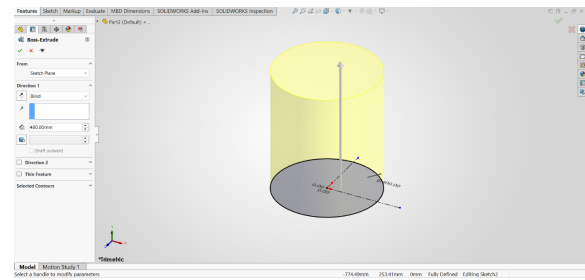


(b) Extruding the base sketch.

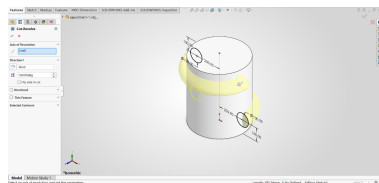


(c) Creating revolved features on diagonal corners.

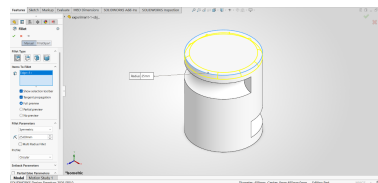

(d) Applying a Fillet feature to the top edge.

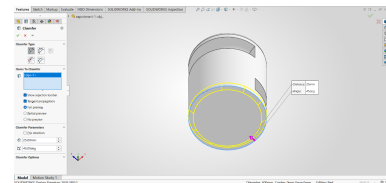

(e) Applying a Chamfer feature to the bottom edge.

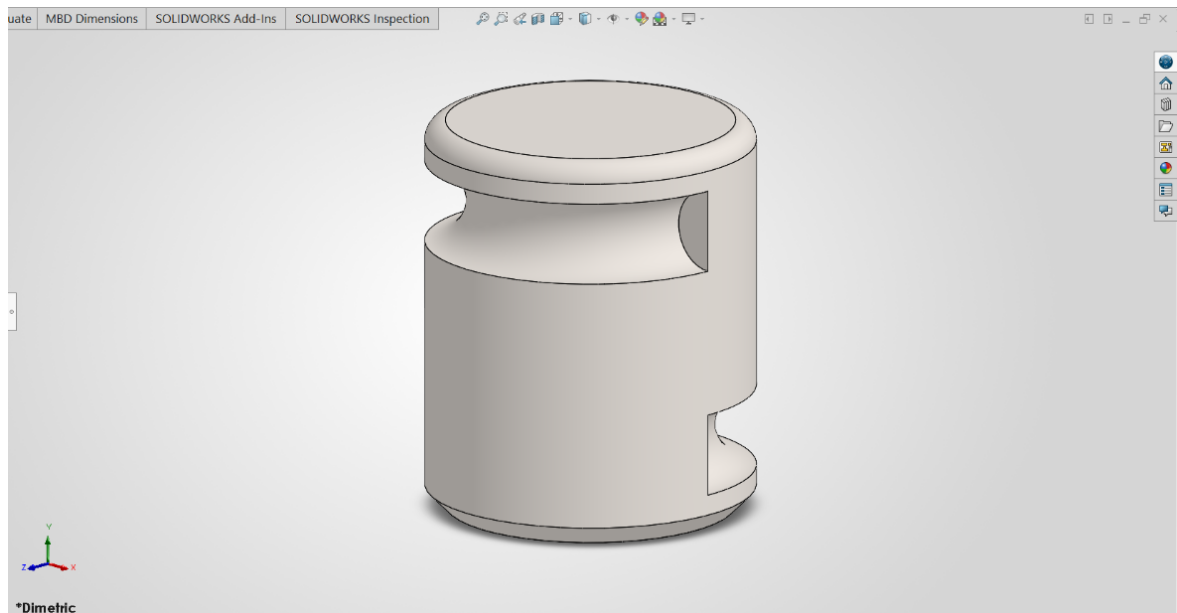

(f) Final Result.

Figure 1.15: Snapshots while Designing Object 6 in Solidworks

1.11 Object 7

This object was constructed using a series of extrusion and cut features. The process began with a sketch of several concentric circles. The outer and middle rings were extruded to form the main body, followed by a separate extrusion for the inner circle. A chamfer was then applied to the edges. Finally, the Extruded Cut feature was used to create the holes around the part, completing the model.


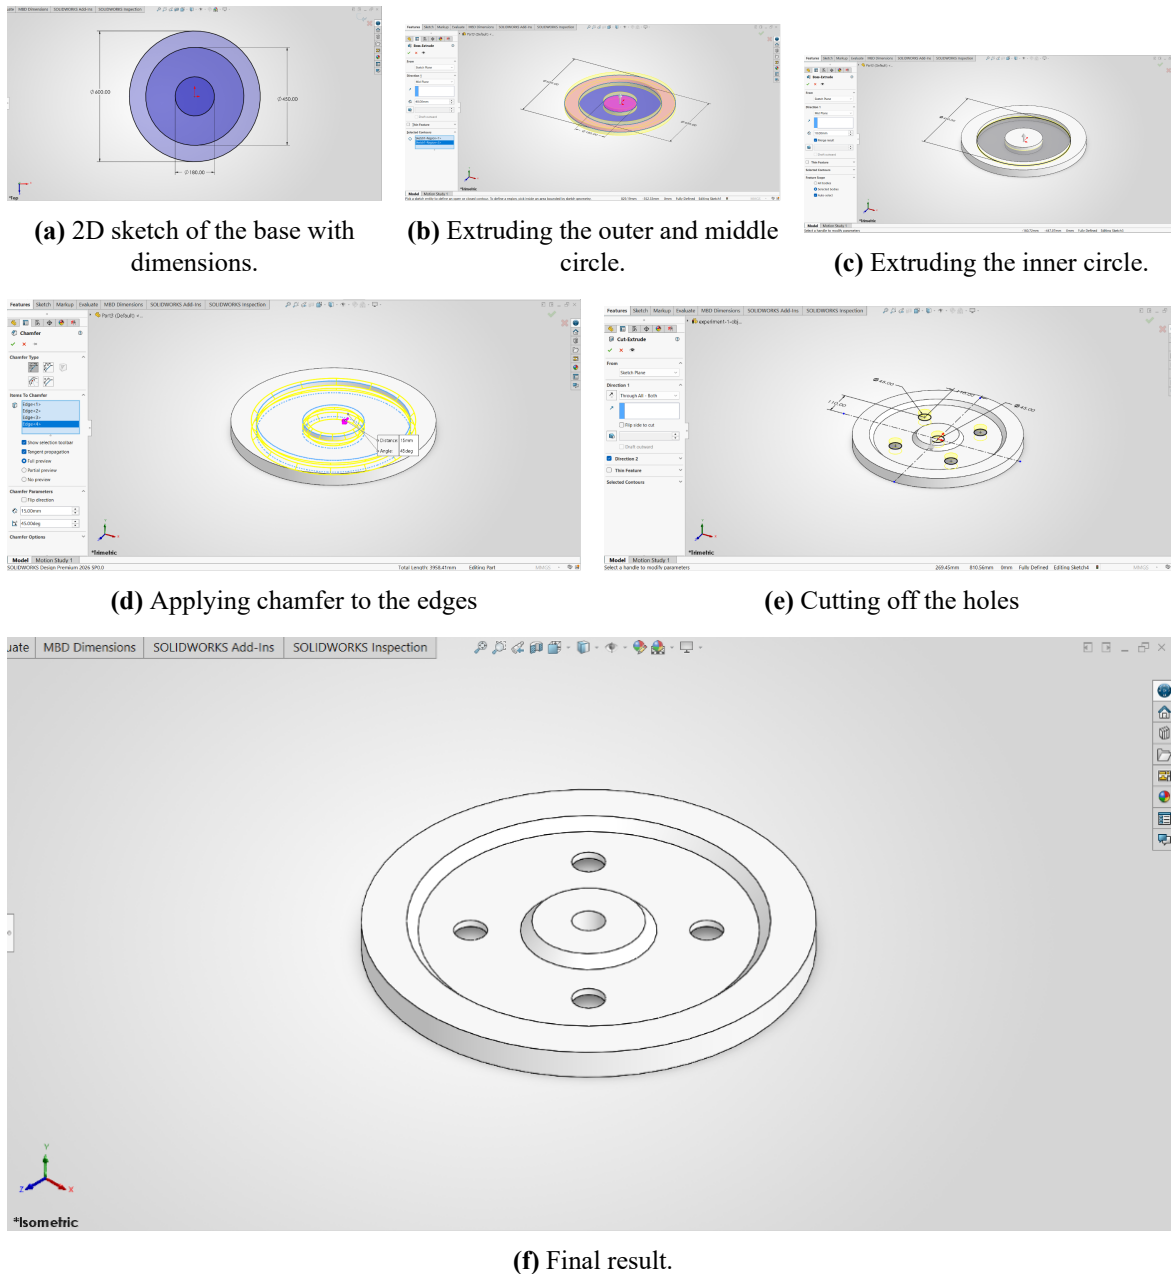



Figure 1.16: Snapshots while Designing Object 7 in Solidworks

1.12 Object 8


This part was created through a sequence of extrusion and cut operations. The process started with sketching and extruding the main base. Following that, two rectangular profiles were sketched and extruded from the sides. The final step involved using the Extruded Cut feature to create the circular holes, completing the model's geometry.

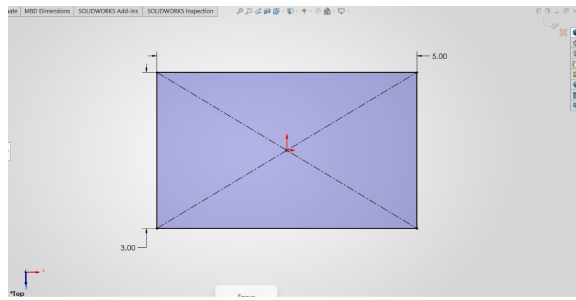


(a) 2D sketch of the base with dimensions.

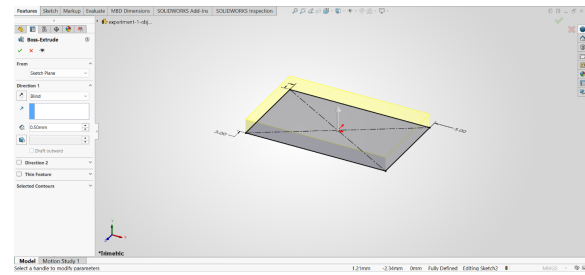


(b) Extruding the base.

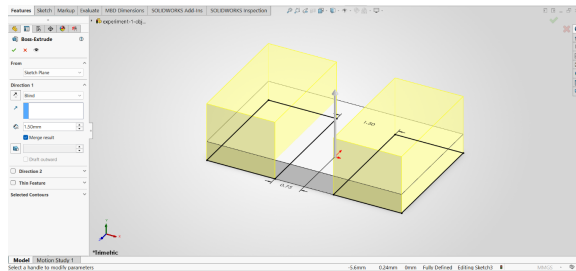

(c) Extruding two rectangles from each side.

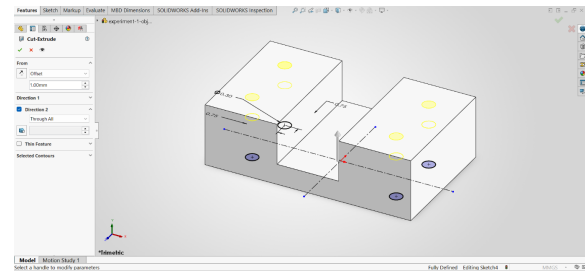

(d) Cutting off the holes.

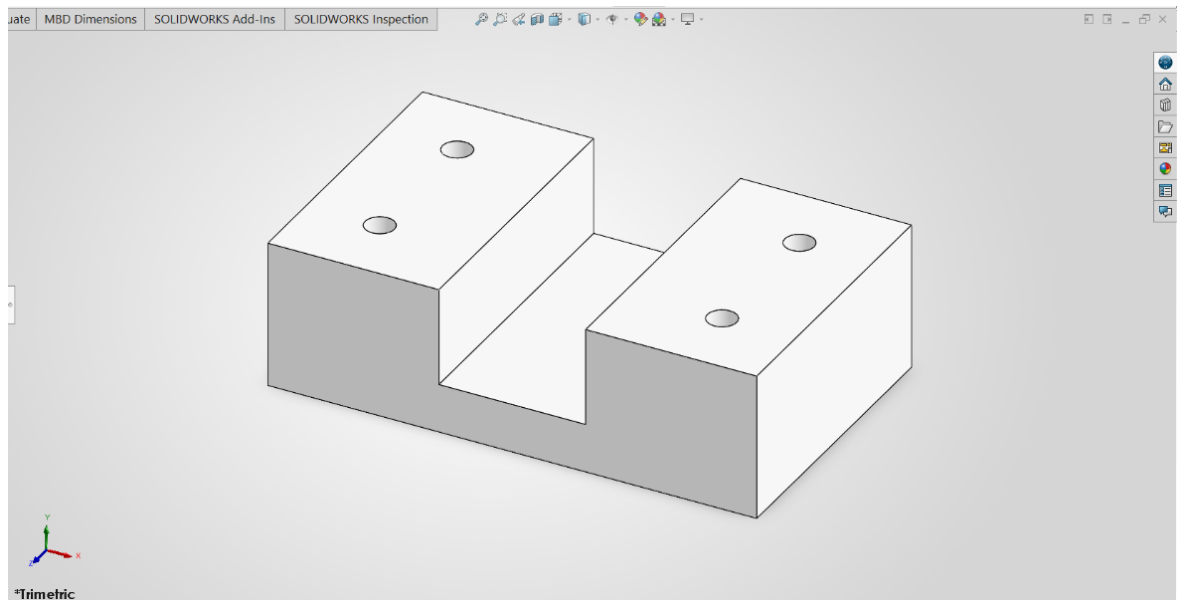


(e) Final result.

Figure 1.17: Snapshots while Designing Object 8 in Solidworks


1.13 Object 9

To create this component, the Revolved Boss/Base feature was employed. The key step was designing a precise 2D sketch that defined the part's cross-section. Once fully defined, this sketch was revolved around a vertical axis to produce the final three-dimensional shape, demonstrating an efficient method for creating parts with rotational symmetry.

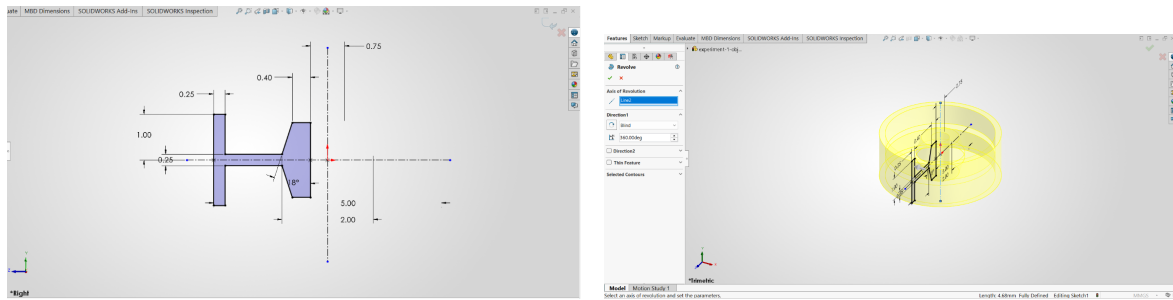

(a) 2D sketch with dimensions.

(b) Revolving the sketch around the vertical axis.

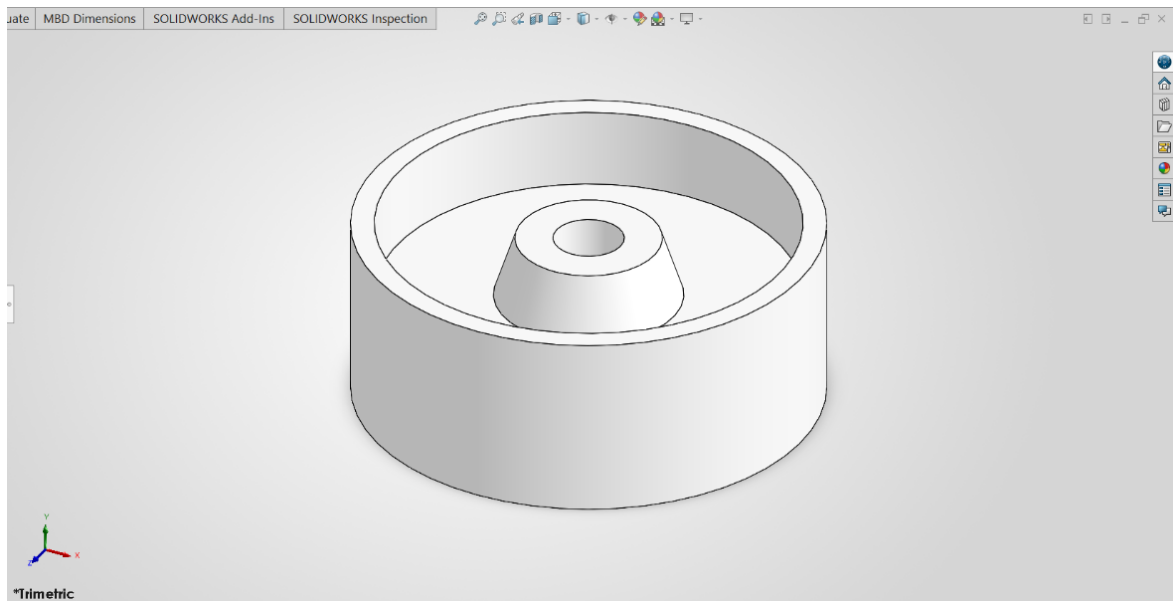

(c) Final Result.

Figure 1.18: Snapshots while Designing Object 9 in Solidworks

1.14 Object 10

The geometry of this object was achieved using the Revolved Boss/Base tool. The process began with the creation of a detailed 2D sketch representing the part's profile. This sketch was then revolved around a central axis. This method is highly efficient for such axisymmetric parts, generating the complex form from a single profile sketch.

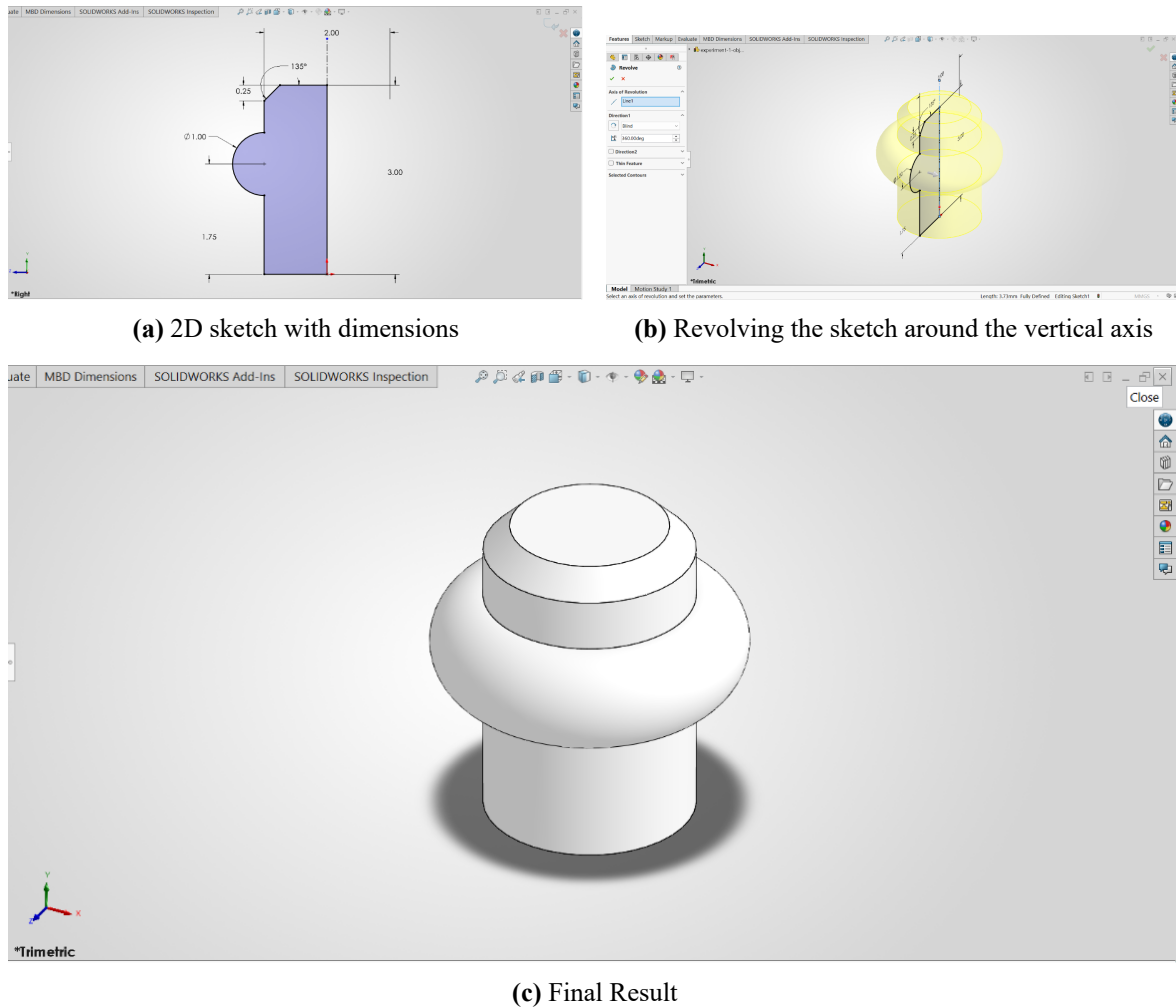


Figure 1.19: Snapshots while Designing Object 10 in Solidworks

1.15 Discussion

This lab provided practical experience in applying fundamental SolidWorks features to create a variety of parts. The objects demonstrated a clear distinction between modeling strategies: prismatic parts like Objects 1 and 2 were best suited for the Extruded Boss/Base feature, while axisymmetric parts like Objects 5, 9, and 10 were most efficiently created using the Revolved Boss/Base feature. This highlighted the importance of analyzing part geometry to select the optimal modeling approach. Furthermore, the process reinforced the necessity of creating fully defined 2D sketches as a robust foundation for all 3D features, which was critical for successfully modeling more complex parts involving multiple features like cuts, fillets, and chamfers.

1.16 Conclusion

In conclusion, this lab successfully met all its objectives by providing a comprehensive introduction to 3D part modeling in SolidWorks. Through the step-by-step creation of ten distinct objects, proficiency was gained in navigating the user interface, creating and fully defining 2D sketches, and applying fundamental features such as Extruded Boss/Base and Revolved Boss/Base. The experiment provided a solid foundation in parametric modeling principles and demonstrated the workflow for translating 2D drawings into complete 3D solid parts.

References

- [1] M. Lombard, *SolidWorks Bible*, 2022nd. Hoboken, NJ: John Wiley & Sons, 2022.
- [2] D. A. Madsen and D. P. Madsen, *Engineering Drawing and Design*, 6th. Clifton Park, NY: Cengage Learning, 2016.
- [3] Dassault Systèmes. “3D CAD Software | SOLIDWORKS,” Accessed: Jul. 17, 2026. [Online]. Available: <https://www.solidworks.com/product/3d-cad>