No. 764,203.

PATENTED JULY 5, 1904.
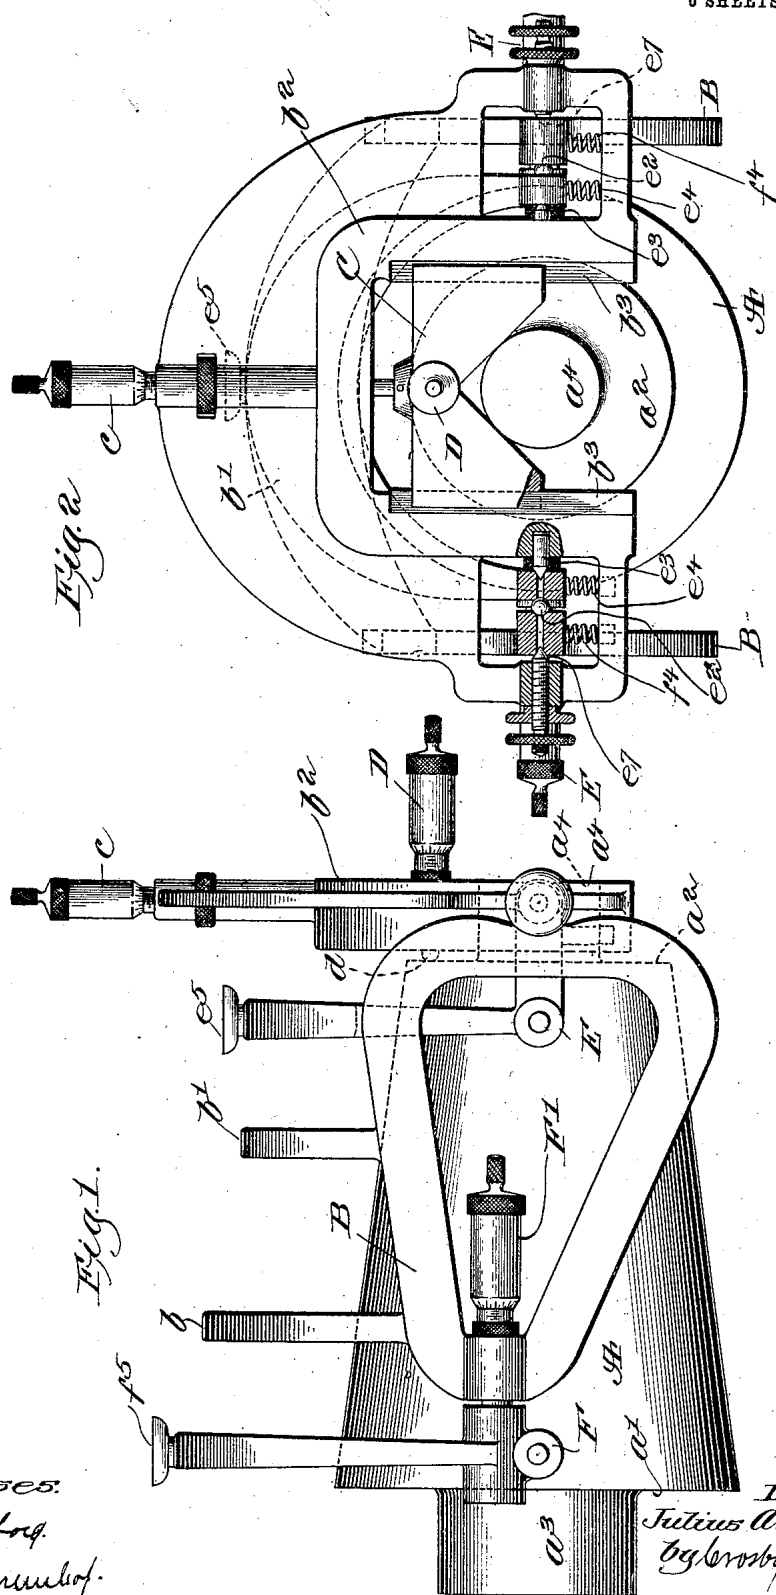
J. A. PERKINS.
CONOMETER.
APPLICATION FILED AUG. 24, 1903.

NO MODEL.

6 SHEETS—SHEET 1.
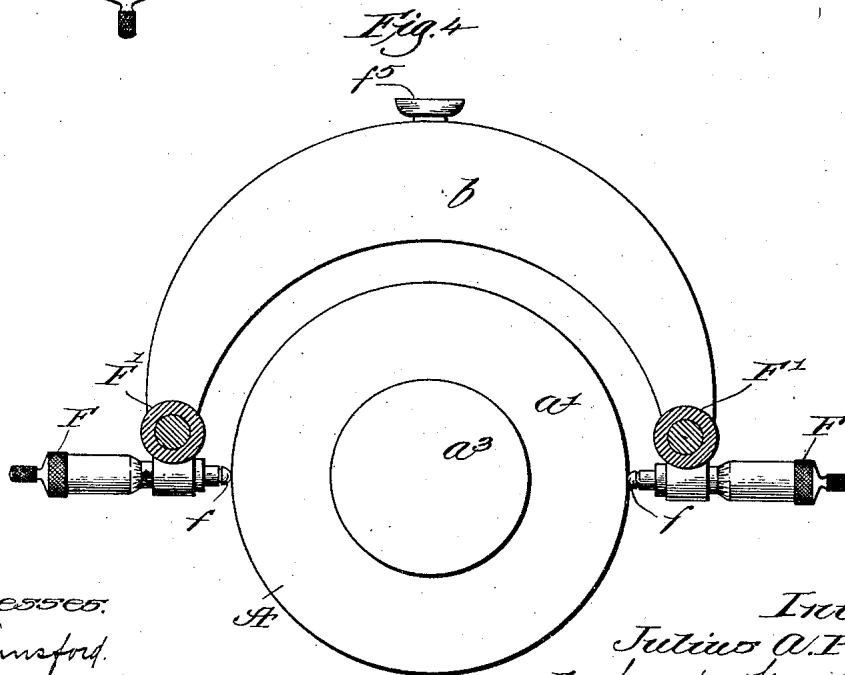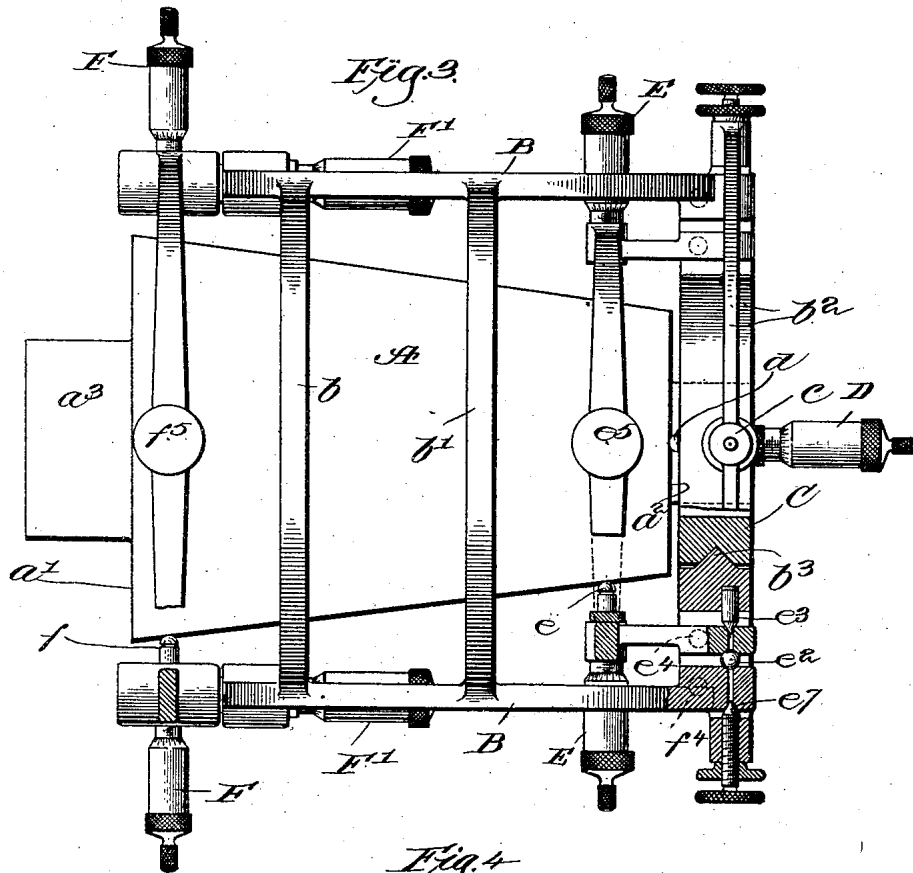
Fig. 2.

Fig. 1.

No. 764,203.

PATENTED JULY 5, 1904.

J. A. PERKINS.
CONOMETER.
APPLICATION FILED AUG. 24, 1903.

NO MODEL.

6 SHEETS—SHEET 2.

Fig.3.

Fig.4

Witnesses:
W. C. Lunsford.
Fred S. Greenleaf.

Inventor
Julius A. Perkins
By Crosby & Gregory
Attys.

Fig. 6.

Fig. 5.

Witnesses

W. C. Sunsford.

Fred S. Greenlef

Inventor

Julius A. Perkins,

By Crosby Gregory

attys.

Witnesses
W. C. Lunsford.
Fred. L. Grundorf.

Inventor
Julius A. Perkins
By Crosby & Gregory
attys.

No. 764,203.

PATENTED JULY 5, 1904.
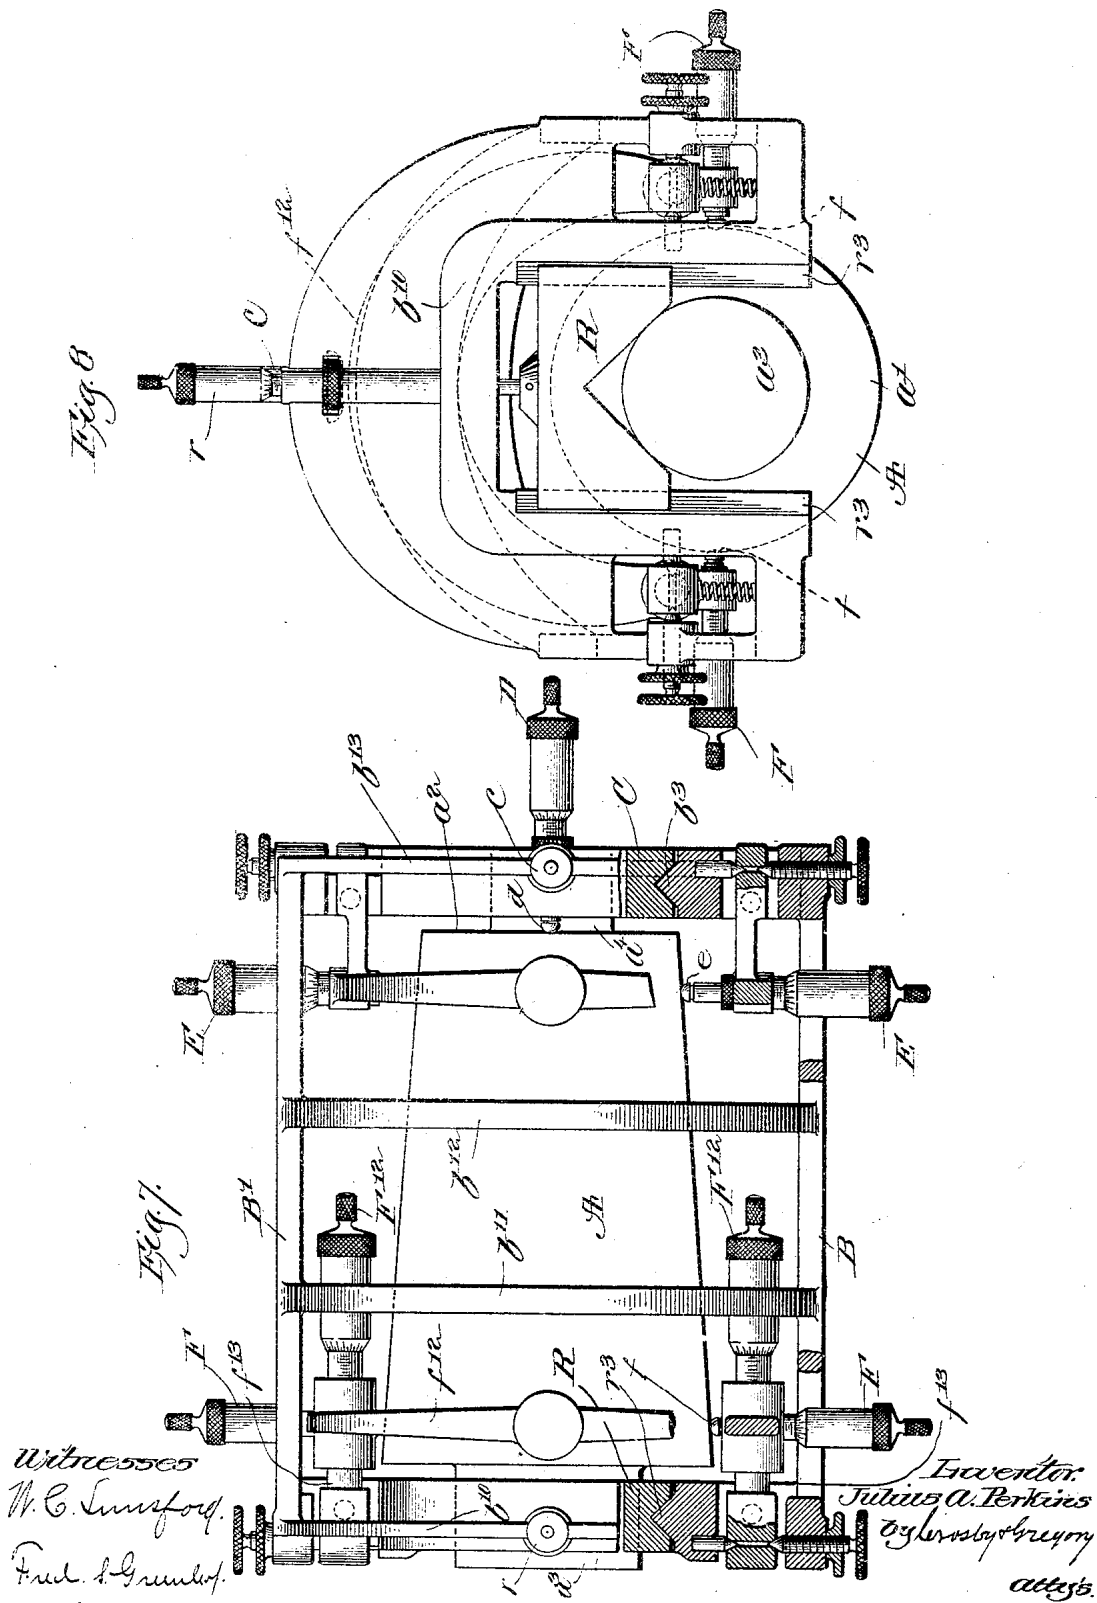
J. A. PERKINS.
CONOMETER.
APPLICATION FILED AUG. 24, 1903.
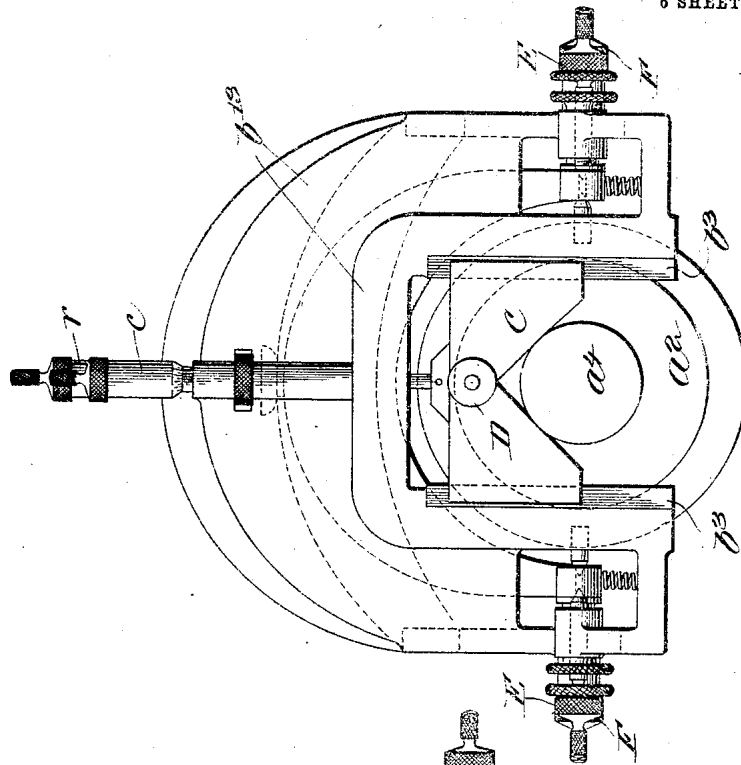
NO MODEL.

6 SHEETS—SHEET 5.

Fig.9.

Fig.11

Fig.10.

No. 764,203.

PATENTED JULY 5, 1904.

J. A. PERKINS,
CONOMETER.
APPLICATION FILED AUG. 24, 1903.

NO MODEL.

6 SHEETS—SHEET 6.

Fig. 12.

Fig. 13.
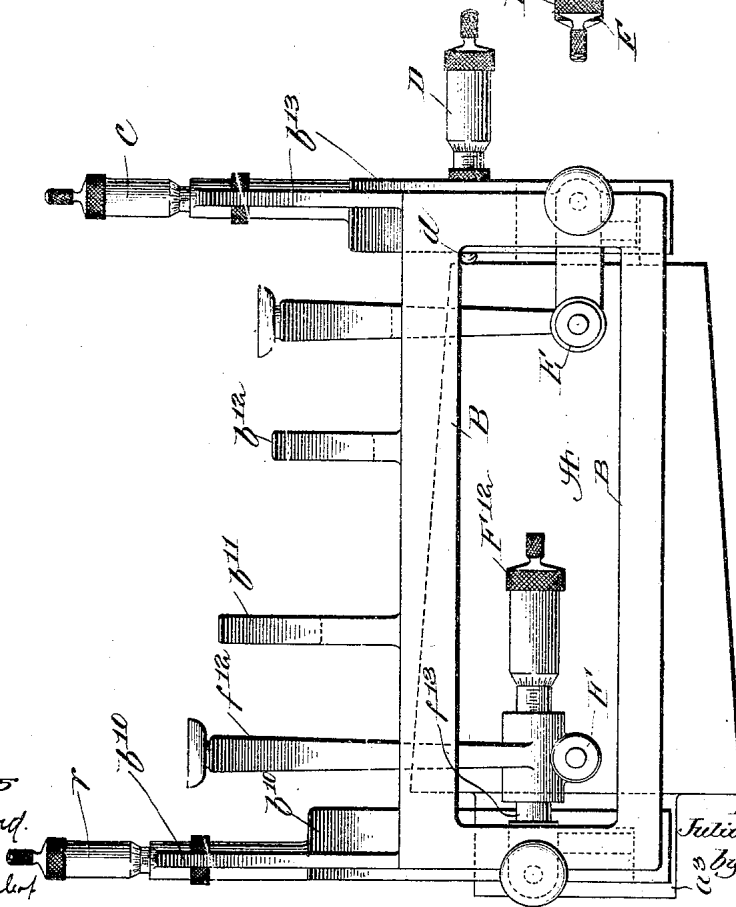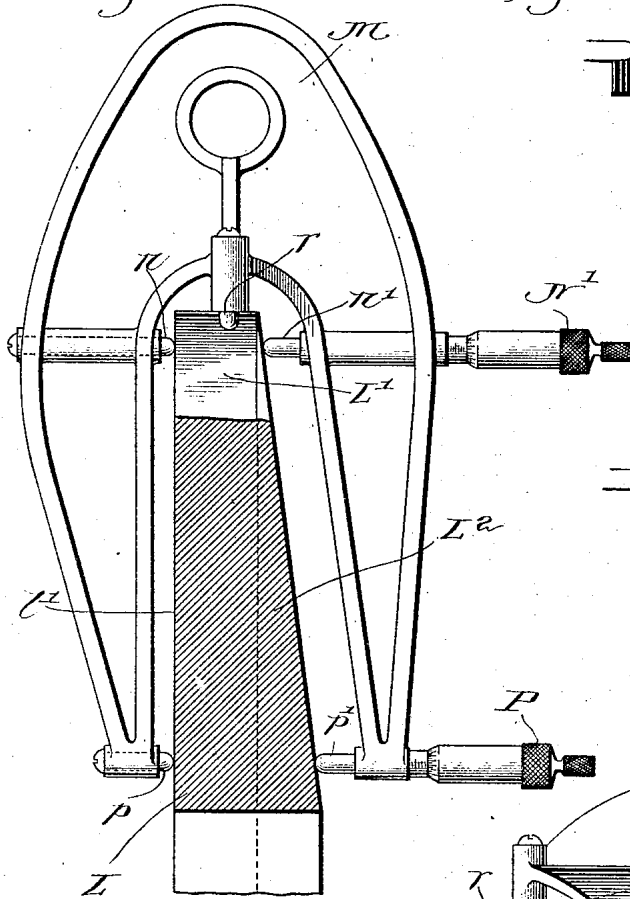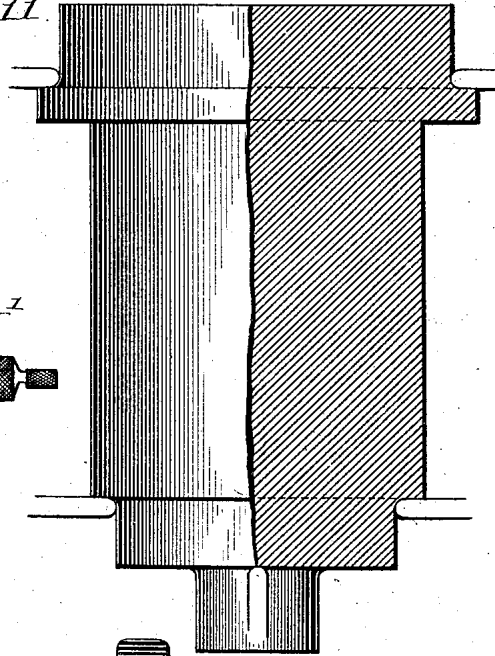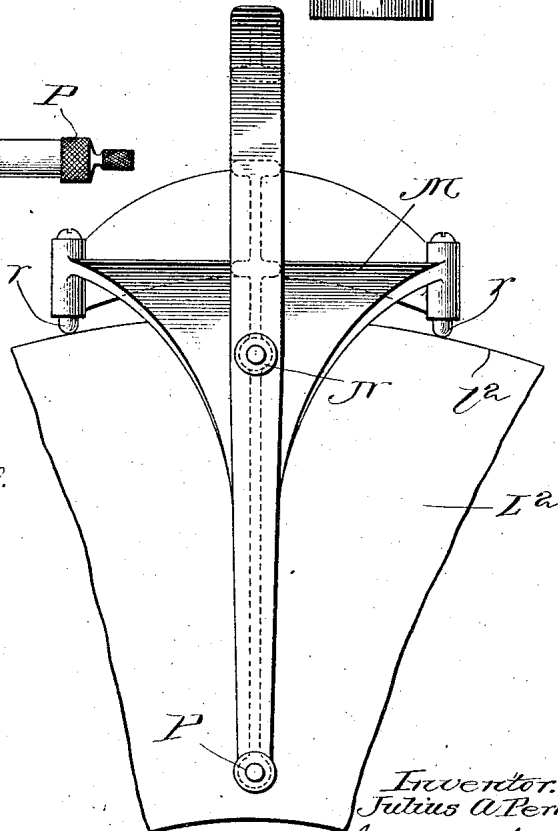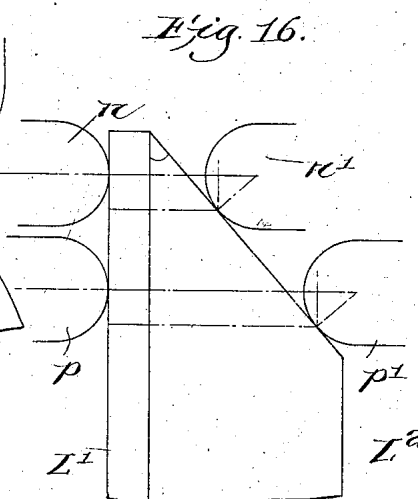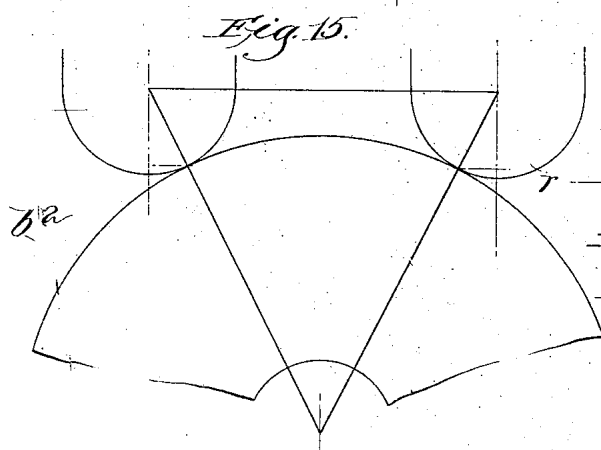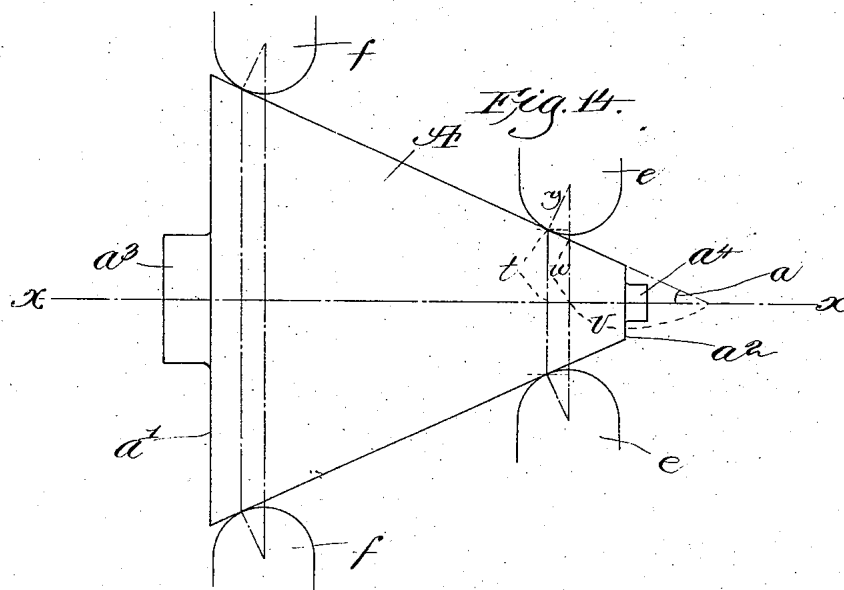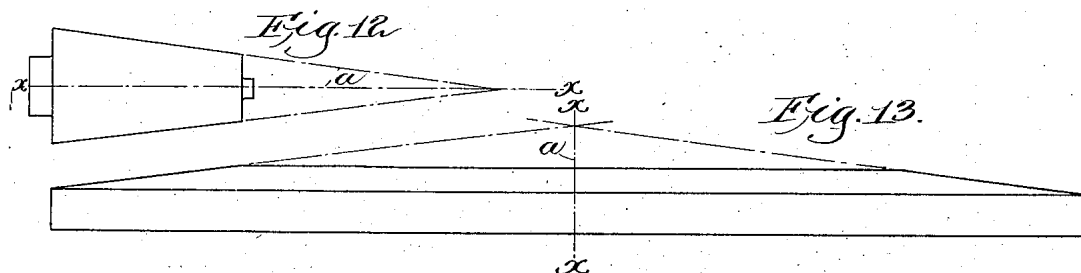
Fig. 14.

Fig. 15.

Fig. 16.

Witnesses.
W. C. Lunsford.
Fred S. Greenleaf.

Inventor,
Julius A. Perkins,
by Crosby & Gregory
atty's.

UNITED STATES PATENT OFFICE.

JULIUS A. PERKINS, OF OMAHA, NEBRASKA.

CONOMETER.

To all whom it may concern:

Be it known that I, JULIUS A. PERKINS, a citizen of the United States, residing at Omaha, county of Douglas, State of Nebraska, have
5 invented an Improvement in Conometers, of which the following description, in connection with the accompanying drawings, is a specification, like letters on the drawings representing like parts.
10 This invention relates to a device for measuring accurately bodies of a conical shape, and I have applied to it the name "conometer." While it is adapted to the measurement of various bodies used for various purposes, which
15 have the shape of a cone, yet it is especially designed for use in roller-bearings in the measurement both of the tracks upon which the rollers run, the surface of which is conoidal, and also of the rollers themselves, which are
20 frustums of cones. In the manufacture of such devices it is not only desirable but absolutely essential that the parts be constructed with absolute accuracy and of exact geometrical shape.
25 In the measurement of bodies having a cylindrical shape the present micrometer-gages are sufficient chiefly for the reason that it is not essential that the measurement should be taken every time in the same plane, since a cy-
30 lindrical body has the same diameter throughout its length. In measuring bodies the surface of which is that of a cone peculiar conditions exist which render accurate measurement with known devices extremely difficult,
35 if not impossible. In order that the desired conical form of the body being manufactured shall be secured, it is necessary that the angle of the cone or the angle between the axis and the elements of the cone shall be exactly
40 determined and that this angle shall be constant throughout the length of the cone. In order to secure this result, it is necessary to take the measurement of the cone in a plurality of planes at given and constant dis-
45 tances from the apex of the cone or some other point having a fixed location with respect to the apex. For practical purposes I find that if the cone be measured in two of

such planes located, respectively, near each end of the cone or frustum of a cone being 50 formed it is sufficient.

In this application I have illustrated the device in several forms all embodying the same principle of operation and shown as adapted more particularly for the measurement in the 55 one instance of conical rollers and in the other instance of conical tracks both for use in roller-bearings; but the device is adapted or with slight changes in construction may be adapted for the measurement of any other 60 articles having surfaces of conical shape.

In the drawings, Figure 1 is a side elevation of a form of the conometer adapted for the measurement of a conical roller. Fig. 2 is an end elevation, partially in cross-section, 65 of the device shown in Fig. 1. Fig. 3 is a top plan of the device shown in Figs. 1 and 2. Fig. 4 is an end elevation of the device shown in Fig. 1, but taken from the end opposite to that from which Fig. 2 is taken. Fig. 5 is a 70 side elevation of another and in some respects a preferred form of a device similar to that shown in Figs. 1 to 4, inclusive, for measuring conical rollers. Fig. 6 is an end elevation of the device shown in Fig. 5. Fig. 7 is 75 a top plan of the device shown in Fig. 5. Fig. 8 is an end elevation of the device shown in Fig. 5, but taken from the end opposite to that from which Fig. 6 is taken. Fig. 9 is a side elevation of a conometer in a form adapt- 80 ed for the measurement of the track of a roller-bearing where the conical surface approaches a plane surface. Fig. 10 is a top plan view of the device shown in Fig. 9. Fig. 11 is a plan view, partially in cross-section, of a test- 85 piece of the conometer when the body to be measured is a conical roller. Fig. 12 is a plan view of a conical roller for a roller-bearing, showing its relation to the imaginary cone with which it forms a part. Fig. 13 is a plan 90 view of the track of a roller-bearing, showing its relation to the imaginary cone of which it forms a part. Figs. 14, 15, and 16 are diagrammatic views illustrating the elements of the conical bodies to be measured in relation 95 to the measuring-points of the conometer and

the corrections which have to be made because of the size of the conometer - points, which are shown greatly exaggerated.

As already stated, in measuring conical
5 bodies I find it necessary to measure the body diametrically in a plurality of planes—for example, two planes located, respectively, at known distances from the apex of the cone. When the angle of the cone marked a in Figs.
10 12 and 13 or the angle between the cone element and its axis x x is forty-five degrees or less, the measurement of the cone can be taken with greater accuracy by fixing the measuring elements, which are usually micrometer-
15 points, in a given position with respect to the apex of the cone and then obtaining the variable measurement of the diameter of the cone in such given position; but when this angle a exceeds forty-five degrees and the surface of
20 the cone approaches more or less a plane surface—as shown, for example, in Fig. 13—the measurement of the diameter of the cone in a plane at right angles to the axis becomes liable to practical error, because of the approach
25 of the surface upon which the micrometer-points rest to parallelism with the plane of the points themselves. In this latter case, therefore, it is necessary to obtain the measurement of the cone by fixing the measuring elements
30 of the conometer, which are usually micrometer-points, in a given position with respect to the axis of the cone and then obtaining the variable distance between the fixed plane or position of the points and the apex of the cone.
35 It is of course evident in both cases that the distance from the apex to the plane of the diameter desired can be obtained by measuring the distance from that plane to any other point fixed with respect to the apex—as, for
40 example, the base of the cone or a plane located at a given distance from the base of the cone—and it is also evident that the distance from the axis to the conical surface in a desired plane can be obtained by measuring the
45 distance from a circle or cylindrical surface at a known distance from the axis—as, for example, the peripheral edge at the base of the cone or a continuation thereof when the same have been made accurately concentric
50 with the axis. While, therefore, in each of the two cases above referred to the same two facts are ascertained—viz., first, the diameter of the cone in a given plane and, second, the distance of that plane from the apex of the
55 cone—mechanical conditions caused by the variation in the angle of the cone referred to and illustrated in practice in the conical roller of a roller - bearing and the track therefor (shown in Figs. 12 and 13) require two dif-
60 ferent types of my conometer, which, while embodying the same principle, obtain the result in a slightly-different manner. The devices illustrated in the first eight figures of the drawings are for measuring that form of
65 cone where the variable measurement may

more accurately be taken directly in the plane of the diameter to be measured, while the device illustrated in Figs. 9 and 10 of the drawings is for the measurement of a cone where the variable measurement cannot as well be 70 taken in the plane of the diameter, but can be practically taken parallel to the axis.

While it is not essential, simplicity of construction and ease of calculation demands that when there are two or more measuring ele- 75 ments, such as micrometer-points, between which desired measurements are taken, they shall all lie in the same plane. For example, the micrometer-points for measuring a diameter shall all lie in the plane of that diameter, 80 and the micrometer-points for measuring the distance from the apex to the diameter shall all lie in a plane parallel to and intersecting the axis of the cone. If they are otherwise located, while they may be fixed in position, 85 considerable calculation would be required, the construction would be more involved, and the degree of accuracy would be lessened In the devices shown in the first eight figures of the drawings the diametrical measurements 90 are taken in two planes at given distances from the end of the conical roller, and in the device shown in Figs. 9 and 10, where the angle of the cone is much more than forty-five degrees, the measurements are taken at given 95 distances from the outer periphery of the roller track-piece.

In conical bodies, such as conical rollers and roller-tracks having a conical surface, it is impossible to base the measurements from the 100 apex of the cone; but in the case of the rollers it is absolutely essential that the journals for the rollers shall be true cylinders and concentric with the axis of the roller, and also that the ends of the rollers themselves shall be 105 plane surfaces at right angles to the axis. Hence these may serve as bases for the desired measurements. In the case of tracks for the rollers, such as herein shown, it is essential that either the interior or exterior peripheral 110 surface shall also be cylindrical and concentric with the axis of the cone, and it is desirable, if not essential, that the bottom of the track shall be a plane surface at right angles to the axis of the cone. Hence these surfaces 115 also serve as bases for the desired measurement. If, however, surfaces as last referred to are not necessary in the construction of the device to be measured, it is comparatively easy to produce either cylindrical or plane surfaces 120 with absolute accuracy upon the parts which may serve as bases for the desired measurements.

In Figs. 1, 2, 3, and 4 I have shown a form of conometer embodying my invention de- 125 signed for the measurement of a cone for a roller - bearing having a small angle. The frusto-conical roller A is shown with plane ends a' a^2 and cylindrical concentric bearings a^3 a^4. The frame of the conometer is shown 130

with two side pieces B, united by arched connections $b\ b'\ b^2$, the latter of which is provided with ribs b^3, upon which slides a cross-bar C, a micrometer-screw c being connected with
5 the cross-bar C, so that it may be accurately adjusted with respect to the frame. The cross-bar C has a **V**-shaped notch formed therein, whereby it is adapted to rest upon one of the bearings of the roller, as a^4, and support the
10 conometer symmetrically with respect to the axis of the roller. In conical bodies where the length of the cone is considerable and the angle small one such support, as the cross-bar C, may be found sufficient and will serve to
15 hold the conometer in line with the axis of the cone without appreciable variation in accuracy of measurement; but except in such cases it is preferable that the frame of the conometer be similarly supported at both ends, and
20 the conometer illustrated in Figs. 5, 6, 7, and 8 shows such support, whereby absolute accuracy in the positioning of the conometer parallel to the axis of the cone is secured. In each case a micrometer-point d is provided in one
25 of the cross-bars, as C, and a micrometer-screw D is connected therewith, whereby the micrometer-point may be adjusted parallel to the axis of the cone and brought into contact with one or the other plane surfaces forming
30 the ends of the roller. In Figs. 1, 2, 3, and 4 there are two pair of micrometer-points for obtaining diametrical measurements in two planes. One pair, $e\ e$, Fig. 3, is attached by micrometer-screws E E to an arched pivot at
35 $e^2 e^3$, Figs. 2 and 3, to the frame, and springs e^4 serve to maintain this arch normally in elevated position, so that upon depression of the arch by gently pressing upon the thumb-piece e^5 the diameter may be determined in the usual
40 manner. In a similar manner measurement is determined by the other pair of micrometer-points $f\ f$, which are likewise provided with micrometer-screws F F. This pair of points are attached to the frame B B, which is likewise
45 pivoted at the points $e^2\ e^7$, Figs. 2 and 3, and normally held in elevated position by the springs $f^4\ f^4$ until gently depressed by the thumb-piece f^5. The end of the frame B B is connected with an arch-piece carrying the
50 thumb-piece f^5 and is adjustable on the frame B B by means of the micrometer-screws F'. By means of the micrometer-screw c, which serves to adjust the cross-bar C, the lines of the pivots $e^2\ e^3\ e^7$ are brought into line with
55 the axis of the conical body to be measured. This may be done in various ways, depending upon the character of the article being measured. The device shown in the drawings, as has already been explained, is adapted for use
60 in connection with a conical roller-bearing having journals which are true cylinders concentric with the axis of the roller and which serve as bases for the measurement. The zero-point for the micrometer-screw c may desig-
65 nate the position of the device when the apex

of the **V**-shaped notch in the cross-bar C is in line with the pivots $e^2 e^3 e^7$. The distance from the apex of this **V**-shaped notch to the axis of the cone, which is coincident with the jour-
70 nal a^4, will vary, of course, with the radius of the journal, which radius is known or ascertainable by a micrometer-caliper, and it will be seen that this distance is equal to the radius of the journal multiplied by the tangent
75 of half the angle formed by the **V**-shaped notch; but, as shown, it is convenient to make this angle of the **V**-shaped notch ninety degrees, so that half the angle is forty-five degrees, and the tangent of the angle of forty-
80 five degrees equals one divided by the square root of two. Hence to bring the line of the pivots $e^2 e^3\ e^7$ into line with the axis of the conical body the micrometer-screw c is set so that its reading will be the result of multiply-
85 ing the radius by the square root of two, which is 1.414214. For example, if the radius of the journal a^4 is one-half inch the micrometer-screw c should be set to read .707107 inches above the zero-point.
90 The form of conometer shown in Figs. 5, 6, 7, and 8 is similar to that just described; but in this case the arch-piece carrying the second pair of micrometer-points is separately pivoted from the arch-piece carrying the first
95 pair to the main frame. The frame after being adjusted into position with respect to the axis of the cone remains fixed, and the pairs of micrometer-points are separately moved to take the desired measurement. It will not
100 be necessary to describe the device of Figs. 5, 6, 7, and 8 in detail, as it will be seen to be very similar in construction save for the one feature mentioned to that already described. The frame is composed of two side pieces B',
105 B', united by arch-pieces b^{10}, b^{11}, b^{12}, and b^{13}. The micrometer-screw c, the cross-bar C, and the ribs b^3 are all as in the device just described, and a similar construction is provided at the opposite end, consisting of the micrometer-
110 screw r, cross-bar R, and ribs r^3, whereby the other end of the frame is positioned and supported accurately upon the journal a^3. The micrometer-point d, with the adjusting-screw D, is shown in the cross-bar C, whereby the posi-
115 tion of the conometer with respect to the apex of the cone is determined by positioning it with respect to the plane surface a^2 of the smaller end of the roller; but it is obvious that this device could, if desired, be transferred to
120 the cross-bar R. The pair of micrometer-points $f\ f$, carried by the micrometer-screws F in this latter device, are carried by an arch f^{12} and are mounted to be adjustable therewith and with respect to the other pair $e\ e$ by means
125 of the micrometer-screws F^{12}. The arch f^{12} is pivoted to the frame B B by being mounted upon bars f^{13}, pivoted at the rear of the frame in a similar manner as the corresponding arch carrying the micrometer-points $e\ e$ is
130 pivoted at the other end of the frame. It will

thus be seen that the micrometer-screws D F' provide for accurate determination of the distance of the respective pairs of micrometer-points $e\ e$, $f\ f$ from the plane end of the con-
5 ical body or roller and that the pairs of micrometer-points themselves provide for the accurate determination of the diameter of the roller or conical body in given planes.

In the form of the device illustrated in Figs.
10 9 and 10 L represents a portion of a track for a roller-bearing consisting of a cylindrical base L' and a conical portion L². In this case the angle of the cone is such that the conical surface approaches the plane surface. In this
15 form of conical-shaped body it is assumed that the surface l' is a plane surface at right angles to the axis of the cone and the surface l^2 is a true cylindrical surface concentric to the axis of the cone. The form of the device herein
20 illustrated for measuring this type of body consists of a frame M, in which are mounted two pairs of conometer-points $n\ n'$, $p\ p'$, one of said pairs being shown as fixed and the other adjustable by micrometer-screws N P,
25 respectively. These pairs of conometer-points are shown at fixed distances apart; but, as in the case of the device already described, means may be employed for adjusting the distance between the pairs. Another pair of
30 conometer-points $r\ r$ are mounted in the frame M in a plane transverse to that of the other conometer-points and serve to engage the peripheral cylindrical surface l^2. The pairs of conometer-points $n\ n'$ and $p\ p'$ are arranged
35 at right angles to the pair $r\ r$ and are intermediate thereof.

While I have thus shown several embodiments of my invention, it is obvious from what has already been stated that the inven-
40 tion may be embodied in various forms, according to the particular conditions of the conical body to be measured, without altering in any way the principles of the invention.

In measuring any of the conical bodies re-
45 ferred to successive measurements are taken on different radial lines, and all the devices are adapted to be shifted for this purpose either by the movement of the conometer itself or by the movement of the body being measured, the
50 surfaces serving as the bases for the measurements being in each instance adapted to such shifting.

In what has been said heretofore it has been assumed that the conometer-points are true
55 mathematical points; but it is obvious that such a point or even an approach to such a point is impossible not only for constructive reasons, but because of the inaccuracy which would be caused by the wear of a small point.
60 It is necessary, therefore, to make the conometer-points in each instance of sufficient size so that the accuracy of the measurement may not be lessened by the wearing away of the points. I therefore make the conometer-points
65 of considerable size and absolutely spherical

on the end. This renders necessary corrections in the measurements, which are explained by reference to Figs. 14, 15, and 16, in which the conometer-points are shown greatly exaggerated. Fig. 14 shows the conometer-points 70 arranged as in the device illustrated in the first eight figures of the drawings, and Figs. 15 and 16 show the conometer-points arranged as in the device illustrated in Figs. 9 and 10 of the drawings. In these three views, Figs. 14, 15, 75 and 16, the conical bodies illustrated in connection with the devices of Figs. 1 to 10 of the drawings are shown exaggerated in portions, but with the same letters of reference to indicate their parts. An explanation of the correc- 80 tion in connection with the conometer-points as shown in Fig. 14 will suffice for both forms. In Fig. 14, $x\ x$ represent the axis of the cone, and a the angle of the cone. The point of the conometer is shown as spherical at its end, 85 having a radius y. v represents, therefore, the distance from the apex of the cone to the axis of the conometer-points or the distance between the apex of the cone and the plane in which the diametrical measurement is to be 90 taken, and this diametrical measurement desired is represented by w; but it will be seen that from the size of the conometer-points the measurement actually taken is represented by t. The radius of the conometer-point y is a 95 known quantity. The angle of the cone a is known, and the measurement w is known. It will be seen, therefore, from a simple trigonometrical calculation that

$$t = \frac{w\ y\ \sin.\ a}{v} + w.$$ 100

A suitable modification of course must be made if the distance v is not measured from the apex of the cone, but from a plane, such as the end 105 of a roller in a roller-bearing, and either the distance t or the distance w may be regarded as a known quantity, the other being ascertained from the formula. When the measurements are taken in, the other type of a cone 110 having an angle of more than forty-five degrees, as illustrated in Figs. 15 and 16, the angle $a\ x$ will of course be the complement of the cone-angle a; but upon the same principles above set forth the exact distances de- 115 sired may be obtained.

When a number of conical bodies—such, for example, as the rollers for roller-bearings—are to be made, it is desirable to set the conometer to the desired measurement in the 120 first place and test the roller as it is being ground or otherwise formed. For this purpose a test-piece, such as shown in Fig. 11, may be made, which will reduce the labor of measurement and insure similarity, as well as 125 accuracy, of the various rollers. This test-piece is formed with a series of shoulders properly located with respect to the apex and a series properly located with respect to the axis of the cone, these shoulders being ar- 130

ranged to allow for the size of the microme-
ter-points on principles already explained.
By setting the micrometer-points so that they
will butt against both series of shoulders they
will be in position to gage the roller or other
conical body being formed.

In the following claims the distance from
the apex refers either to the actual apex, real
or imaginary, of the conical body or to a
plane, real or imaginary, at a known distance
from the apex and perpendicular to the axis,
because either the distance from the apex or
from such a plane may be converted into the
other by simple addition or subtraction, and
the term "diameter" refers either to the ac-
tual diameter or radius or some fraction of
the diameter for the same reason.

Having described my invention, what I
claim as new, and desire to secure by Letters
Patent, is—

1. A conometer comprising a plurality of
means for determining accurately a respec-
tive plurality of diameters of a conical body
in a respective plurality of planes perpendicu-
lar to the axis of the conical body, and means
for determining accurately the distance of
each of said planes from the apex of the cone.

2. A conometer comprising two means for
determining accurately the diameters of a
conical body in two different planes perpen-
dicular to the axis of the conical body, and
means for determining accurately the distance
of each of said planes from the apex of the
cone.

3. A conometer comprising means for de-
termining accurately the diameters of the
conical body in a plurality of planes, means
non-dependent upon the conical surface for
locating said planes perpendicular to the axis
of the cone, and means for determining accu-
rately the distance of each of said planes from
the apex of the cone.

4. A conometer comprising means for de-
termining accurately the diameters of the
conical body in two planes, means non-depend-
ent upon the conical surface to locate said
planes perpendicular to the axis of the cone,
and means for determining accurately the dis-
tance of each of said planes from the apex of
the cone.

5. A conometer comprising a frame, means
for maintaining the frame in a fixed position
with respect to the apex and the axis of the
conical body, means mounted on said frame
for determining accurately the diameters of
the conical body in a plurality of planes per-
pendicular to the axis of the cone, and means
for determining accurately the distance of
said planes from the apex of the cone.

6. A conometer comprising a frame, means
for maintaining the frame in a fixed position
with respect to the apex and the axis of the
conical body, means mounted on said frame
for determining accurately the diameters of

the conical body in two planes perpendicular
to the axis of the cone, and means for de-
termining accurately the distance of said
planes from the apex of the cone.

7. A conometer comprising a frame, means
for maintaining the frame in and accurately
adjusting it into a fixed position with respect
to the apex and the axis of the conical body,
means mounted on said frame for determining
accurately the diameters of the conical body
in a plurality of planes perpendicular to the
axis of the cone, and means for determining
accurately the distance of said planes from
the apex of the cone.

8. A conometer comprising a frame, means
for maintaining the frame in and accurately
adjusting it into a position parallel to the axis
and fixed with respect to the apex of the con-
ical body, means mounted on said frame for
determining accurately the diameters of the
conical body in a plurality of planes perpen-
dicular to the axis of the cone, and means for
determining accurately the distance of said
planes from the apex of the cone.

9. A conometer comprising a frame adapted
to rest on axial projections of the conical
body, means for accurately adjusting the
frame into a position parallel to the axis and
fixed with respect to the apex of the conical
body, means mounted on said frame for de-
termining accurately the diameters of the
conical body in a plurality of planes perpen-
dicular to the axis of the cone, and means for
determining accurately the distance of said
planes from the apex of the cone.

10. A conometer comprising a frame, means
for maintaining the frame in a fixed position
with respect to the apex and the axis of the
conical body, means including pairs of mi-
crometer-points mounted on said frame for
determining accurately the diameters of the
conical body in a plurality of planes perpen-
dicular to the axis of the cone, and means for
determining accurately the distance of said
planes from the apex of the cone.

11. A conometer comprising a frame, means
for maintaining the frame in and accurately
adjusting it into a fixed position with respect
to the apex and the axis of the conical body,
means including pairs of micrometer-points
mounted on said frame for determining accu-
rately the diameters of the conical body in a
plurality of planes perpendicular to the axis
of the cone, and means for determining ac-
curately the distance of said planes from the
apex of the cone.

12. A conometer comprising a frame, means
for maintaining the frame in and accurately
adjusting it into a position parallel to the axis
and fixed with respect to the apex of the con-
ical body, means including pairs of microme-
ter-points mounted on said frame for deter-
mining accurately the diameters of the conical
body in a plurality of planes perpendicular to

the axis of the cone, and means for determining accurately the distance of said planes from the apex of the cone.

13. A conometer comprising a frame adapted to rest on axial projections of the conical body, means for accurately adjusting the frame into a position parallel to the axis and fixed with respect to the apex of the conical body, means including pairs of micrometer-points mounted on said frame for determining accurately the diameters of the conical body in a plurality of planes perpendicular to the axis of the cone, and means for determining accurately the distance of said planes from the apex of the cone.

14. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of the conical body, two pairs of micrometer-points mounted on said frame for determining accurately the diameters of the conical body in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said pairs of micrometer-points with respect to the other, and means for determining accurately the distance of the plane of one of said pairs of micrometer-points from the apex of the cone.

15. A conometer comprising a frame, means for maintaining the frame in and accurately adjusting it into a fixed position with respect to the apex and the axis of the conical body, two pairs of micrometer-points mounted on said frame for determining accurately the diameters of the conical body in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said pairs of micrometer-points with respect to the other, and means for determining accurately the distance of the plane of one of said pairs of micrometer-points from the apex of the cone.

16. A conometer comprising a frame, means for maintaining the frame in and accurately adjusting it into a position parallel to the axis and fixed with respect to the apex of the conical body, two pairs of micrometer-points mounted on said frame for determining accurately the diameters of the conical body in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said pairs of micrometer-points with respect to the other, and means for determining accurately the distance of the plane of one of said pairs of micrometer-points from the apex of the cone.

17. A conometer comprising a frame adapted to rest on axial projections of the conical body, means for accurately adjusting the frame into a position parallel to the axis and fixed with respect to the apex of the conical body, two pairs of micrometer-points mounted on said frame for determining accurately the diameters of the conical body in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said pairs of micrometer-points with respect to the other, and means for determining accurately the distance of the plane of one of said pairs of micrometer-points from the apex of the cone.

18. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of a conical body, a plurality of arches each carrying a pair of micrometer-points and each movable on said frame transversely of the axis of the cone whereby the diameters of the conical body may be accurately determined in a plurality of planes perpendicular to the axis of the cone, and means for determining accurately the distance of said planes from the apex of the cone.

19. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of a conical body, two arches each carrying a pair of micrometer-points, and each movable on said frame transversely of the axis of the cone and normally held by springs away from the axis, whereby upon movement of the arches to bring the micrometer-points into line with the axis the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, and means for determining accurately the distance of said planes from the apex of the cone.

20. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of the conical body, two arches each carrying a pair of micrometer-points and each movable on said frame transversely of the axis of the cone, whereby the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the apex of the cone.

21. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of the conical body, two arches each carrying a pair of micrometer-points and each movable on said frame transversely of the axis of the cone and normally held by springs away from the axis of the cone, whereby upon movement of the arches to bring the micrometer-points into line with the axis the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the apex of the cone.

22. A conometer comprising a frame, means for maintaining and accurately adjusting the frame into a position parallel to the axis and fixed with respect to the apex of the conical body, two arches each carrying a pair of micrometer-points, and each movable on said frame transversely of the axis of the cone and

normally held by springs away from the axis, whereby upon movement of the arches to bring the micrometer-points into line with the axis the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, and means for determining accurately the distance of said planes from the apex of the cone.

23. A conometer comprising a frame, means for maintaining and accurately adjusting the frame into a position parallel to the axis and fixed with respect to the apex of the conical body, two arches each carrying a pair of micrometer-points and each movable on said frame transversely of the axis of the cone, whereby the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the apex of the cone.

24. A conometer comprising a frame, means for maintaining and accurately adjusting the frame into a position parallel to the axis and fixed with respect to the apex of the conical body, two arches each carrying a pair of micrometer-points and each movable on said frame transversely of the axis of the cone and normally held by springs away from the axis of the cone, whereby upon movement of the arches to bring the micrometer-points into line with the axis the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the apex of the cone.

25. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of a conical body, a plurality of arches each carrying a pair of micrometer-points and each pivotally movable on said frame transversely of the axis of the cone whereby the diameters of the conical body may be accurately determined in a plurality of planes perpendicular to the axis of the cone, and means for determining accurately the distance of said planes from the apex of the cone.

26. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of a conical body, two arches each carrying a pair of micrometer-points, and each pivotally movable on said frame transversely of the axis of the cone and normally held by springs away from the axis, whereby upon movement of the arches to bring the micrometer-points into line with the axis the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone,

and means for determining accurately the distance of said plane from the apex of the cone.

27. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of the conical body, two arches each carrying a pair of micrometer-points and each pivotally movable on said frame transversely of the axis of the cone, whereby the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the apex of the cone.

28. A conometer comprising a frame, means for maintaining the frame in a fixed position with respect to the apex and the axis of the conical body, two arches each carrying a pair of micrometer-points and each pivotally movable on said frame transversely of the axis of the cone and normally held by springs away from the axis of the cone, whereby upon movement of the arches to bring the microme-ter-points into line with the axis the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the apex of the cone.

29. A conometer comprising a frame, means for maintaining and accurately adjusting the frame into a position parallel to the axis and fixed with respect to the apex of the conical body, two arches each carrying a pair of micrometer-points, and each pivotally movable on said frame transversely of the axis of the cone and normally held by springs away from the axis, whereby upon movement of the arches to bring the micrometer-points into line with the axis the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, and means for determining accurately the distance of said plane from the apex of the cone.

30. A conometer comprising a frame, means for maintaining and accurately adjusting the frame into a position parallel to the axis and fixed with respect to the apex of the conical body, two arches each carrying a pair of micrometer-points and each pivotally movable on said frame transversely of the axis of the cone, whereby the diameters of the conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the apex of the cone.

31. A conometer comprising a frame, means for maintaining and accurately adjusting the

frame into a position parallel to the axis and fixed with respect to the apex of the conical body, two arches each carrying a pair of micrometer-points and each pivotally movable 5 on said frame transversely of the axis of the cone and normally held by springs away from the axis of the cone, whereby upon movement of the arches to bring the micrometer-points into line with the axis the diameters of the 10 conical body may be accurately determined in two planes perpendicular to the axis of the cone, means for accurately adjusting one of said arches with respect to the other, and means for accurately determining the distance of the plane of one of said arches from the 15 apex of the cone.

In testimony whereof I have signed my name to this specification in the presence of two subscribing witnesses.

JULIUS A. PERKINS.

Witnesses:
    EDWARD E. BRUCE,
    PAUL GOEPEL.