

Department Of Aerospace Engineering



Scripting in ANSA using Python

Experiential Learning Project Report

Submitted by,

AKULA UDAY KIRAN	1RV23AS004
MOVVA SAI LALITHA DEVI	1RV23AS030
SHANTHOSH KV	1RV23AS053
TEJAS L	1RV23AS061

Under the guidance of

Dr. Benjamin Rohit
Assistant Professor
Dept. of Aerospace Engineering
RV College of Engineering

In partial fulfilment for the award of elective course
of
AEROSPACE STRUCTURES (AS244AI)
Even Semester
2024-2025

RV COLLEGE OF ENGINEERING

BENGALURU-59

(Autonomous Institution Affiliated to VTU, Belagavi)

Department of Aerospace Engineering

CERTIFICATE

Certified that the experiential learning project work titled ‘**Scripting in ANSA using Python**‘ is carried out by **Akula Uday Kiran (1RV23AS004)**, **Movva Sai Lalitha Devi (1RV23AS030)**, **Shanthosh KV (1RV23AS053)**, **Tejas L (1RV23AS061)**, in partial fulfilment for the award of the course, Aerospace Structures (AS244AI) of R.V. College Of Engineering, Bengaluru, affiliated to Visvesvaraya Technological University, Belagavi during the year 2024-2025. It is certified that all corrections/suggestions indicated for the Internal Assessment have been incorporated in the project report deposited in the departmental library. The report has been approved as it satisfies the academic requirements in respect of project work prescribed by the institution.

Signature of Guide

Signature of Head of the Department

Signature of Principal

Dr. K N Subramanya

External Viva

Name of Examiners	Signature with Date

RV COLLEGE OF ENGINEERING

BENGALURU-59

(Autonomous Institution Affiliated to VTU, Belagavi)

Department of Aerospace Engineering

DECLARATION

We, **Akula Uday Kiran, Movva Sai Lalitha Devi, Shanthosh KV, Tejas L**, students of fourth semester B.E., department of ASE, RV College of Engineering, Bengaluru, hereby declare that the experiential learning project titled '**Scripting in ANSA using Python**' has been carried out by us and submitted in partial fulfilment for the award of degree of Bachelor of Engineering in Aerospace Engineering during the year 2024-25.

Further we declare that the content of the report has not been submitted previously by anybody for the award of any degree or diploma to any other university.

We also declare that any Intellectual Property Rights generated out of this project carried out at RVCE will be the property of RV College of Engineering, Bengaluru and we will be one of the authors of the same.

Place: Bengaluru

Date:

Name	Signature
1. Akula Uday Kiran (1RV23AS004)	
2. Movva Sai Lalitha Devi (1RV23AS030)	
3. Shanthosh KV (1RV23AS053)	
4. Tejas L (1RV23AS061)	

ACKNOWLEDGEMENT

We are indebted to our guide, **Dr. Benjamin Rohit**, Assistant Professor, Dept of Aerospace Engineering for his wholehearted support, suggestions and invaluable advice throughout our project work and also helped in the preparation of this thesis.

Our sincere thanks to **Dr. Supreeth R**, Associate Professor and Head, Department of Aerospace Engineering, RVCE for his support and encouragement.

We express sincere gratitude to our beloved Principal, **Dr. K. N. Subramanya** for his appreciation towards this project work.

We thank all the teaching staff and technical staff of Aerospace Engineering department, RVCE for their help and providing access to simulation software and laboratory facilities.

We are grateful to the management of RV College of Engineering for providing the necessary infrastructure and resources to complete this project successfully.

Lastly, we take this opportunity to thank our family members and friends who provided all the backup support throughout the project work.

Contents

I	Computational Meshing Fundamentals	11
1	Introduction	13
2	Understanding Meshing: The Foundation of Numerical Simulations	15
2.1	Introduction to Computational Discretization	15
2.1.1	The Indispensability of Meshing in Numerical Methods	15
2.2	Classification and Characteristics of Mesh Types	16
2.2.1	Structured Meshes	16
2.2.2	Unstructured Meshes	18
2.2.3	Hybrid Meshes	18
2.2.4	Specialized Mesh Types	19
3	Mesh Elements: The Building Blocks of Discretization	21
3.1	Element Order: Linear vs. Higher-Order	21
3.2	2D Elements	21
3.3	3D Elements	22
4	Mesh Quality Assessment and Optimization	23
4.1	Geometric Quality Metrics	23
4.1.1	Aspect Ratio	23
4.1.2	Skewness	23
4.1.3	Jacobian	23
4.1.4	Warpage	23
4.2	Solution-Based Quality Assessment	24
4.2.1	Solution Gradients	24
4.2.2	Convergence Studies	24
4.3	Mesh Optimization Techniques	24
4.3.1	Smoothing	24
4.3.2	Refinement and Coarsening	24
4.3.3	Topology Optimization	24
II	Automation and Scripting in Computational Meshing	25
5	Automation in Pre-Processing Software	27
5.1	Background	27
5.1.1	Python in Engineering Automation	27
5.1.2	ANSA Pre-Processing Software	27
6	Meshing Automation Strategy and Implementation	29

6.1	Automation Strategy Development	29
6.1.1	Primary Objectives	29
6.1.2	Workflow Architecture	29
6.2	Phase 1 Implementation: Basic Automation	30
6.2.1	Phase 1 Methodology	30
6.3	Phase 2 Implementation: Enhanced Automation	30
6.3.1	Phase 2 Enhancements	30
6.3.2	Phase 2 Workflow Architecture	31
6.4	Log File Overview	31
6.5	Detailed Analysis of Runs	31
6.5.1	Run: Mesh Size 3	31
6.6	Error Analysis	33
6.6.1	Key Features of Phase 2 Implementation	52
6.7	Explanation of the UML Diagram	52
6.7.1	Enumeration - WORKFLOW_STEPS	52
6.7.2	Main Class - ANSAMeshingWorkFlow	52
6.7.3	Supporting Classes	53
6.8	Diagram	53
7	Advanced Automation Techniques	55
7.1	Batch Processing and Parametric Studies	55
7.1.1	Parametric Mesh Generation	55
7.1.2	Design of Experiments for Meshing	55
7.2	Integration with CAD Systems	55
7.2.1	CAD Integration Strategies	55
7.2.2	Quality Assurance and Validation	56
8	Results	57
8.1	Element Statistics:	58
8.1.1	Quality check for Element size with 3:	58
8.1.2	Quality check for Element size with 5:	63
8.1.3	Quality check for Element size with 7:	65
8.2	Element Statistics:	69
8.3	Mesh Quality Parameters:	69
8.4	Conclusion	70
8.4.1	Key Achievements	70
8.4.2	Technical Validation	70
8.4.3	Industrial Impact and Benefits	70
8.4.4	Future Enhancements	71
8.4.5	Final Remarks	71
III	Appendix	73
8.5	Phase 1 Implementation: Basic Automation	75
8.5.1	Phase 1 Methodology	75
8.6	Phase 2 Implementation	76
8.6.1	Phase 2 Methodology	76
8.6.2	Phase 2 Technical Implementation	76

8.7 Log file	87
------------------------	----

List of Tables

8.1	Mesh Quality Checks for Element Size 3	62
8.2	Detailed Quality Check Comparison for Element Size 5	65
8.3	Quality Check Parameters for element size 7	68
8.4	Mesh Element Metrics for element size 7	68
8.5	Element Statistics	69

List of Figures

2.1	Conceptual Illustration of a Structured Mesh. Note the regular, grid-like arrangement and implicit connectivity.	17
6.1	UML Diagram for the entire workflow	54
8.1	The image shows a 3D CAD model of a camshaft with two lobes, designed in SolidWorks.	57
8.2	Conceptual Illustration of a Structured Mesh. Note the regular, grid-like arrangement and implicit connectivity.	58
8.3	structured mesh with element size 3	58
8.4	Mesh quality visualization of a camshaft model highlighting elements based on aspect ratio and quality metrics in ANSA.	59
8.5	Ideal mesh quality check table in ANSA	60
8.6	The image displays a camshaft mesh in ANSA with warping quality check highlighted, showing excellent element quality (warp = 1.00).	60
8.7	The image shows a camshaft mesh in ANSA with skewness quality check activated, indicating generally acceptable element skewness (skew = 1.20).	61
8.8	The image displays the camshaft mesh with Jacobian quality check, showing that most elements have high geometric accuracy with Jacobian values close to 1.	61
8.9	structured mesh with element size 5	63
8.10	The aspect ratio distribution is shown with all elements in yellow, reflecting uniform and nearly ideal element proportions throughout the geometry.	63
8.11	The mesh is assessed for warpage, and the predominantly uniform yellow coloring implies very low face warping and good planarity.	64
8.12	Jacobian :The mesh is color-mapped based on Jacobian quality, with most elements in the high-quality blue-green range, indicating good element shape and volume distortion control.	64
8.13	The mesh is evaluated for skewness, showing primarily yellow-green colors, suggesting acceptable element alignment with minimal angular distortion.	65
8.14	structured mesh with element size 7	65
8.15	The image shows element aspect ratios ranging from 1.01 to 1.65, indicating well-shaped and uniformly sized mesh elements.	66
8.16	The Jacobian plot displays values between 0.83 and 1.0, confirming excellent element shape quality with no distortion.	66
8.17	Skewness values range from 0.002 to 0.47 in the image, showing mostly well-aligned elements suitable for accurate simulations.	67
8.18	The warpage plot reveals values under 0.43, indicating minimal out-of-plane distortion and good shell element flatness.	68
8.19	The image displays a Jacobian quality plot of a structured camshaft mesh in ANSA, highlighting element quality distribution based on deformation metrics.	69

Part I

Computational Meshing Fundamentals

Chapter 1

Introduction

The field of computational engineering has revolutionized the way we approach complex engineering problems. At the heart of most numerical simulations lies the fundamental process of meshing - the discretization of continuous domains into finite elements that can be computationally analyzed. This report provides a comprehensive examination of meshing principles, methodologies, and applications in modern computational analysis.

Meshing serves as the bridge between the continuous mathematical models that describe physical phenomena and the discrete computational algorithms that solve them. Without proper meshing techniques, even the most sophisticated numerical methods would be rendered ineffective. The quality of a mesh directly impacts the accuracy, stability, and computational efficiency of any numerical simulation.

In recent years, the demand for high-fidelity simulations has grown exponentially across industries ranging from aerospace and automotive to biomedical and environmental engineering. This has led to significant advances in meshing algorithms, element types, and quality assessment techniques. Understanding these developments is crucial for engineers and researchers working in computational analysis.

Chapter 2

Understanding Meshing: The Foundation of Numerical Simulations

This chapter provides an exhaustive and highly detailed exposition of meshing, a foundational process in computational simulations across diverse engineering and scientific disciplines, including Finite Element Analysis (FEA), Computational Fluid Dynamics (CFD), and various other numerical methods. It delves deeply into the theoretical underpinnings, practical implications, and advanced considerations of mesh generation. Topics covered include the precise definition, overarching purpose, classification of mesh types, an in-depth analysis of element characteristics, rigorous quality assessment metrics, and a comprehensive breakdown of the meshing workflow, encompassing geometry preparation, algorithmic approaches, and post-meshing validation. Special attention is given to the interplay between mesh characteristics and simulation accuracy, convergence, and computational efficiency.

2.1 Introduction to Computational Discretization

In the contemporary landscape of engineering and scientific research, the analytical solution of partial differential equations (PDEs) governing complex physical phenomena (e.g., fluid flow, heat transfer, structural deformation, electromagnetic fields) is often intractable, if not impossible, due to irregular geometries, non-linear material properties, or intricate boundary conditions. To circumvent this analytical impasse, numerical methods have emerged as indispensable tools, enabling the approximation of solutions to these complex problems. A pivotal and often computationally intensive prerequisite for nearly all numerical simulations is the process of **meshing**, also frequently referred to as **grid generation**.

At its core, meshing represents the fundamental step of *discretization*. It transforms a continuous physical domain, which intrinsically possesses an infinite number of degrees of freedom, into a finite collection of smaller, geometrically simpler, and interconnected sub-domains known as **elements** or **cells**. This collection of elements, along with their shared corner points called **nodes** or **vertices**, constitutes the **computational mesh** or **grid**. The rationale behind this transformation is to convert an infinitely descriptive problem into a computationally tractable problem with a finite number of unknowns that can be solved efficiently by numerical algorithms.

2.1.1 The Indispensability of Meshing in Numerical Methods

The necessity of meshing permeates virtually every stage and aspect of a numerical simulation workflow. Its importance can be elucidated through several critical functions it performs:

- **Transformation to a Discrete Problem:** Numerical methods, such as the Finite Element Method (FEM), Finite Volume Method (FVM), and Finite Difference Method (FDM), are inherently designed to operate on discrete points or finite volumes. Meshing provides the geometric framework upon which these discrete formulations are applied. For instance, in FEM, the governing equations are formulated and solved piecewise over each element, and then assembled globally.
- **Approximation of Complex Geometries and Physics:** Real-world engineering components and fluid domains often exhibit highly intricate geometries. Meshing allows for the accurate approximation of these complex shapes by tessellating them with simpler geometric primitives. Furthermore, it facilitates the piecewise approximation of continuous field variables (e.g., displacement, pressure, temperature) across the domain, often using polynomial interpolation functions defined within each element.
- **Computational Tractability and Efficiency:** Direct analytical or numerical solutions for continuous systems are typically computationally prohibitive. By reducing the problem to a finite number of elements and nodes, meshing effectively transforms an infinite-dimensional problem into a finite-dimensional algebraic system of equations, which can then be solved iteratively or directly by computers. The computational cost, memory requirements, and solution time are directly influenced by the number of elements and nodes in the mesh.
- **Application of Boundary Conditions and Initial Conditions:** Physical boundary conditions (e.g., prescribed displacements, applied forces, fixed temperatures, fluid inlet/outlet velocities, heat fluxes) and initial conditions (for transient problems) are naturally applied at the nodes, edges, or faces of the mesh elements. The mesh provides the necessary discrete interfaces for these conditions.
- **Accurate Representation of Gradients and Fluxes:** Many physical phenomena are driven by gradients (e.g., heat flux driven by temperature gradient, stress driven by strain gradient). A well-designed mesh is crucial for accurately resolving these gradients, especially in regions of high variation, such as boundary layers in fluid flow or stress concentrations in structural components.
- **Post-Processing and Visualization of Results:** Once the numerical solver has converged, the computed solution variables (e.g., stress tensors, velocity vectors, temperature fields) are typically available at the nodes or element centroids of the mesh. The mesh provides the spatial context for interpolating, visualizing, and analyzing these results, often through contour plots, vector fields, or deformation plots.

2.2 Classification and Characteristics of Mesh Types

Meshes are broadly categorized based on the regularity of their element arrangement and connectivity. Each type presents distinct advantages and disadvantages, making their selection dependent on the specific application, geometric complexity, and computational resources.

2.2.1 Structured Meshes

Structured meshes are characterized by a highly organized, curvilinear grid-like arrangement of elements, where each interior node has a fixed and predictable number of neighbors. This topological regularity often implies a logical I, J, K indexing scheme, similar to a 3D array, which simplifies data storage and access.

- **Definition:** Consist of quadrilateral (2D) or hexahedral (3D) elements arranged in a regular, topologically Cartesian pattern, even if geometrically distorted to conform to boundaries. The connectivity between elements is implicit and uniform.
- **Advantages:**
 - **High Accuracy and Resolution:** For problems with dominant flow directions (e.g., boundary layers in CFD), structured meshes, particularly those highly refined in one direction, can provide superior resolution and accuracy with fewer elements compared to unstructured meshes.
 - **Computational Efficiency:** The regular connectivity allows for highly optimized algorithms, efficient memory access patterns (e.g., cache coherence), and often faster convergence for certain solvers (e.g., Finite Difference Method, some Finite Volume solvers). This is particularly true for explicit schemes.
 - **Simpler Data Structures:** The implicit connectivity reduces the need for explicit storage of neighbor lists, simplifying coding and memory management.
 - **Smoother Transitions:** Element size transitions tend to be smoother, which can improve solution stability.
- **Disadvantages:**
 - **Geometric Restrictions:** Generating structured meshes for complex, arbitrary geometries is extremely challenging and often impossible. Multi-block structured meshing (dividing the domain into simpler blocks that can be structured meshed) is a common technique, but still complex.
 - **Time-Consuming Generation:** For anything beyond very simple geometries, manual or semi-automated structured mesh generation can be a laborious and time-consuming process.
 - **Difficult Local Refinement:** Localized refinement (e.g., around a small hole or sharp corner) often requires remeshing large portions of the domain or employing complex grid stretching techniques.
- **Common Elements:** Quadrilaterals (2D), Hexahedra (3D).

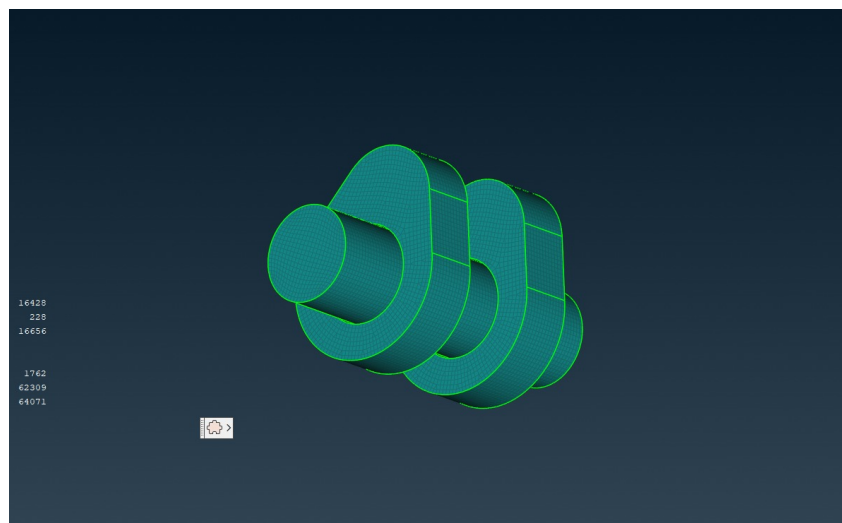


Figure 2.1: Conceptual Illustration of a Structured Mesh. Note the regular, grid-like arrangement and implicit connectivity.

2.2.2 Unstructured Meshes

Unstructured meshes offer unparalleled flexibility in conforming to complex geometries by allowing arbitrary arrangements of elements. Connectivity between elements must be explicitly stored.

- **Definition:** Composed of elements (typically triangles in 2D, tetrahedra in 3D, or a combination of types) with irregular connectivity. Each node can have a variable number of neighbors, and the element sizing can vary significantly across the domain.
- **Advantages:**
 - **Geometric Versatility:** Unstructured meshing algorithms can handle highly complex geometries with arbitrary features (holes, fillets, sharp corners) with relative ease. This is their most significant advantage.
 - **Automated Generation:** Advanced algorithms allow for largely automated mesh generation, significantly reducing meshing time for complex models.
 - **Local Refinement Capability:** Elements can be refined locally in regions of interest (e.g., high gradients, areas of interest) without affecting the entire mesh, allowing for efficient use of computational resources. This is crucial for adaptive mesh refinement (AMR).
 - **Solution Adaptivity:** Meshes can be automatically adapted (refined or coarsened) during the simulation based on solution gradients or error indicators, further optimizing accuracy and efficiency.
- **Disadvantages:**
 - **Complex Data Structures:** Explicit storage of element-to-node and element-to-element connectivity requires more complex data structures and memory, potentially leading to higher memory footprint.
 - **Computational Cost:** While element count can be optimized by local refinement, the irregular nature often leads to less optimized memory access and can result in slower convergence for some solvers compared to structured meshes with similar element counts.
 - **Potential for Poor Quality Elements:** Automated unstructured meshing can sometimes generate elements with poor quality (e.g., high skewness, high aspect ratio) if not carefully controlled, which can adversely affect solution accuracy and stability.
 - **Boundary Layer Resolution:** Resolving thin boundary layers (critical in CFD) accurately with purely tetrahedral meshes often requires a very high number of elements, which can be computationally expensive. This often leads to hybrid approaches.

2.2.3 Hybrid Meshes

Hybrid meshes represent a pragmatic approach that combines the strengths of both structured and unstructured meshing strategies within a single computational domain. This is particularly prevalent in CFD.

- **Definition:** Consist of a combination of different element types. A common strategy involves using structured-like elements (e.g., hexahedra or quadrilateral cells) in critical regions where flow is well-aligned or gradients are high (e.g., boundary layers near walls) and unstructured elements (e.g., tetrahedra, triangles) in other regions where geometry is complex or flow is less critical.
- **Advantages:**

- **Optimized Resolution:** Enables highly accurate resolution of phenomena like boundary layers with prismatic (wedge) elements, which are more efficient than tetrahedra for this purpose, while maintaining geometric flexibility in the bulk domain with tetrahedra.
- **Reduced Element Count:** Often leads to a lower total element count for a given level of accuracy compared to purely unstructured meshes, especially for problems dominated by boundary layers.
- **Improved Convergence:** Can lead to better convergence characteristics than purely unstructured meshes due to the higher quality and directional alignment of elements in critical regions.
- **Disadvantages:**
 - **Meshing Complexity:** Generating high-quality hybrid meshes is more complex than generating purely structured or unstructured meshes, requiring specialized algorithms and greater user expertise.
 - **Interface Management:** Careful management of the interfaces between different mesh types is crucial to ensure smooth transitions and accurate solution transfer.
- **Common Combinations:**
 - **2D:** Quadrilaterals in boundary layers, triangles elsewhere.
 - **3D:** Hexahedra/Prisms (wedges) in boundary layers, tetrahedra in the core volume. Pyramids are often used as transitional elements between hexahedra and tetrahedra.

2.2.4 Specialized Mesh Types

Beyond the primary classifications, specialized mesh types exist for particular applications:

- **Body-Fitted Meshes:** Meshes whose boundaries conform exactly to the physical boundaries of the computational domain. Most FEA and CFD meshes are body-fitted.
- **Cartesian Meshes (with cut cells):** A uniform, axis-aligned Cartesian grid that overlays the geometry. Cells that intersect the geometry are “cut,” and special treatment is applied to these cut cells to enforce boundary conditions. Often used in immersed boundary methods or for very fast initial grid generation.
- **Overset/Chimera Meshes:** Multiple overlapping, independently generated meshes are used to cover a complex domain, often with moving bodies. Information is interpolated between overlapping regions. Useful for relative motion problems.
- **Adaptive Meshes (AMR):** Meshes that are dynamically refined or coarsened during the simulation based on solution gradients, error estimators, or other criteria, allowing for optimal allocation of computational resources.
- **Polyhedral Meshes:** A relatively newer development, especially in CFD, where elements can have an arbitrary number of faces (typically 10-14 faces). They offer good numerical stability and can efficiently fill space, often requiring fewer elements than tetrahedral meshes for comparable accuracy.

Chapter 3

Mesh Elements: The Building Blocks of Discretization

The choice of element type is fundamental and depends on the dimensionality of the problem, the specific numerical method (e.g., FEM vs. FVM), and the desired accuracy. Elements are broadly classified by their dimensionality and number of nodes.

3.1 Element Order: Linear vs. Higher-Order

Elements are often classified by their polynomial order, which dictates how the solution variable is interpolated within the element.

- **Linear Elements (First-Order):** These elements use linear interpolation functions (shape functions) to approximate the field variable between their corner nodes. For example, a 3-node triangle or a 4-node quadrilateral.
 - **Advantages:** Simpler to implement, computationally less expensive per element, widely used.
 - **Disadvantages:** Can exhibit “shear locking” in bending-dominated problems in FEA, requires more elements for complex curves, and provides constant (or piecewise constant) derivatives within elements, leading to less accurate stress/flux calculations.
- **Higher-Order Elements (Quadratic, Cubic, etc.):** These elements include additional nodes (e.g., mid-side nodes, face nodes, interior nodes) and use higher-order polynomial interpolation functions. For example, a 6-node triangle (T6) or an 8-node quadrilateral (Q8) in 2D, or a 10-node tetrahedron (T10) or a 20-node hexahedron (H20) in 3D.
 - **Advantages:** Significantly improve accuracy, especially for capturing non-linear variations, bending, and stress concentrations. Can represent curved boundaries more accurately. Requires fewer elements than linear elements for the same level of accuracy in many cases.
 - **Disadvantages:** More complex to implement, higher computational cost per element (more degrees of freedom), and can sometimes be more sensitive to element distortion.

3.2 2D Elements

These are used for 2D planar problems (e.g., plane stress, plane strain, axisymmetric problems) or for meshing surfaces in 3D.

- **Triangle (T3, T6, T10, etc.):**
 - **T3 (3-node linear):** Simplest 2D element. Fast to generate, good for complex boundaries but can be “stiff” in FEA.
 - **T6 (6-node quadratic):** Includes 3 corner nodes and 3 mid-side nodes. Provides much better accuracy for bending and curved boundaries.
- **Quadrilateral (Q4, Q8, Q9, etc.):**
 - **Q4 (4-node linear):** Often preferred over triangles for FEA due to better performance in many scenarios. Can suffer from “hourglassing” in certain dynamic problems.
 - **Q8 (8-node quadratic):** Includes 4 corner nodes and 4 mid-side nodes. Also known as serendipity element. Excellent for structural analysis.
 - **Q9 (9-node quadratic):** Includes 4 corner nodes, 4 mid-side nodes, and 1 central node. Offers slightly improved performance over Q8 for some cases.

3.3 3D Elements

These are the most common elements for full 3D analysis of solids and structures.

- **Tetrahedron (Tet4, Tet10, etc.):**
 - **Tet4 (4-node linear):** Simplest 3D element, excellent for complex geometries, automatic meshing. Can be overly stiff for bending problems.
 - **Tet10 (10-node quadratic):** Significantly improved accuracy, especially for stress concentrations and curved boundaries.
- **Hexahedron (Hex8, Hex20, Hex27, etc.):**
 - **Hex8 (8-node linear):** Brick-like element, computationally efficient, excellent for structural analysis but difficult to generate for complex geometries.
 - **Hex20 (20-node quadratic):** High accuracy, particularly good for stress analysis and contact problems.
- **Prism/Wedge (Penta6, Penta15, etc.):**
 - Used for transitioning between different mesh types, particularly useful in boundary layer meshing for CFD.
- **Pyramid (Pyra5, Pyra13, etc.):**
 - Transitional elements between tetrahedral and hexahedral regions in hybrid meshes.

Chapter 4

Mesh Quality Assessment and Optimization

The quality of a computational mesh is perhaps the most critical factor determining the success of a numerical simulation. Poor mesh quality can lead to convergence difficulties, numerical instabilities, and inaccurate results. This chapter explores the various metrics used to assess mesh quality and techniques for optimization.

4.1 Geometric Quality Metrics

Several geometric parameters are used to evaluate element quality:

4.1.1 Aspect Ratio

The aspect ratio measures the deviation of an element from an ideal shape. For triangular and tetrahedral elements, it is typically defined as the ratio of the longest edge to the shortest altitude. High aspect ratios can lead to numerical problems, particularly in explicit time integration schemes.

4.1.2 Skewness

Skewness measures how close an element is to its ideal shape (equilateral triangle, regular tetrahedron, etc.). Elements with high skewness can significantly degrade solution accuracy and convergence.

4.1.3 Jacobian

The Jacobian determinant relates the element coordinate system to the global coordinate system. Negative Jacobians indicate inverted elements, which are unacceptable in most numerical methods.

4.1.4 Warpage

For quadrilateral and hexahedral elements, warpage measures the deviation from planarity. Highly warped elements can lead to accuracy issues.

4.2 Solution-Based Quality Assessment

Beyond geometric metrics, solution-based quality assessment examines how well the mesh resolves the physics of the problem:

4.2.1 Solution Gradients

Regions with high solution gradients require finer meshes for accurate resolution. Adaptive mesh refinement techniques use gradient-based error estimators to guide mesh optimization.

4.2.2 Convergence Studies

Mesh convergence studies involve systematically refining the mesh and monitoring the convergence of solution variables. This is essential for establishing mesh independence of the solution.

4.3 Mesh Optimization Techniques

Several techniques can be employed to improve mesh quality:

4.3.1 Smoothing

Mesh smoothing algorithms adjust node positions to improve element quality while maintaining the overall mesh topology. Laplacian smoothing is one of the most common approaches.

4.3.2 Refinement and Coarsening

Local mesh refinement increases element density in regions requiring higher resolution, while coarsening reduces density where high resolution is not needed.

4.3.3 Topology Optimization

Advanced techniques can modify the mesh topology (connectivity) to improve overall quality, such as edge swapping in triangular meshes.

Part II

Automation and Scripting in Computational Meshing

Chapter 5

Automation in Pre-Processing Software

5.1 Background

The complexity and time-intensive nature of mesh generation for engineering simulations has driven the development of automation techniques. Modern pre-processing software packages provide scripting interfaces that enable the automation of repetitive meshing tasks, significantly reducing human effort and improving consistency in mesh quality.

5.1.1 Python in Engineering Automation

Python has emerged as a powerful, high-level programming language particularly well-suited for automation tasks in engineering applications. Its ease of syntax, comprehensive standard libraries, and robust third-party ecosystem make it an ideal choice for scripting in computational analysis workflows. The language's interpreted nature allows for rapid prototyping and iterative development, while its extensive numerical computing libraries (NumPy, SciPy, matplotlib) provide seamless integration with computational workflows.

Key advantages of Python for meshing automation include:

- **Readability and Maintainability:** Python's clear syntax structure makes scripts easy to understand, modify, and maintain by different team members.
- **Cross-Platform Compatibility:** Python scripts can run across different operating systems without modification.
- **Integration Capabilities:** Python can interface with various CAE software packages through their respective APIs.
- **Data Processing:** Excellent capabilities for handling geometry data, mesh metrics, and simulation results.

5.1.2 ANSA Pre-Processing Software

ANSA is a comprehensive pre-processing software developed by BETA CAE Systems, specifically designed for Computer-Aided Engineering (CAE) modeling applications. The software supports a

wide range of functionalities essential for finite element analysis preparation, including geometry clean-up, surface and volume meshing, and model setup for various solvers including Abaqus, ANSYS, NASTRAN, LS-DYNA, and others.

ANSA's key capabilities relevant to automated meshing include:

- **Geometry Import and Clean-up:** Supports multiple CAD formats with robust geometry repair and preparation tools.
- **Advanced Meshing Algorithms:** Provides both structured and unstructured meshing capabilities with sophisticated quality control.
- **Multi-Solver Support:** Can generate meshes compatible with various finite element solvers.
- **Python API:** Comprehensive scripting interface that allows complete automation of the meshing workflow.
- **Batch Processing:** Capability to process multiple models or configurations in automated sequences.

The ANSA Python API provides access to all major functionalities through well-structured modules and functions, enabling users to create sophisticated automation scripts that can handle complex meshing scenarios with minimal manual intervention.

Chapter 6

Meshing Automation Strategy and Implementation

6.1 Automation Strategy Development

The development of an effective meshing automation strategy requires careful consideration of the specific requirements, geometry characteristics, and analysis objectives. A systematic approach ensures that the automated workflow produces consistent, high-quality results while minimizing manual intervention.

6.1.1 Primary Objectives

The automation strategy is built around three fundamental objectives that form the core of any effective meshing workflow:

- **Automatic Geometry Import:** Seamless importation of CAD geometry from various formats (STEP, IGES, Parasolid, etc.) with automated geometry validation and repair where necessary. This includes handling of assembly structures, part identification, and geometric feature recognition.
- **High-Quality Mesh Generation:** Implementation of robust meshing algorithms that consistently produce meshes meeting specified quality criteria. This involves setting appropriate element sizes, controlling aspect ratios, ensuring smooth transitions, and managing geometric complexity.
- **Solver-Compatible Export:** Automated export of the meshed model to the target solver format with proper material assignments, boundary condition preparation frameworks, and quality validation reports.

6.1.2 Workflow Architecture

The automation workflow follows a modular architecture that allows for flexibility and maintainability:

1. **Pre-Processing Phase:** Geometry import, validation, and preparation
2. **Meshing Phase:** Surface mesh generation followed by volume mesh creation
3. **Quality Assessment Phase:** Automated quality checking and optimization
4. **Post-Processing Phase:** Export preparation and file generation
5. **Validation Phase:** Final checks and reporting

6.2 Phase 1 Implementation: Basic Automation

The initial phase of automation focuses on establishing the fundamental meshing workflow for specific component types. This implementation demonstrates the core concepts while maintaining simplicity and reliability.

6.2.1 Phase 1 Methodology

The Phase 1 script targets volume meshing for mechanical components, specifically focusing on lobes and shafts which are common in rotating machinery applications.

The script architecture involves:

- Import of geometry in multiple supported formats.
- Sequential surface mesh generation using mapped block techniques
- Volume mesh creation with controlled parameters
- Quality-based remeshing for optimization

6.3 Phase 2 Implementation: Enhanced Automation

Building upon the foundation established in Phase 1, the Phase 2 implementation introduces significant enhancements in terms of robustness, flexibility, and functionality. This advanced version incorporates object-oriented design principles, comprehensive error handling, and multi-scale meshing capabilities.

6.3.1 Phase 2 Enhancements

The Phase 2 script represents a substantial evolution from the initial implementation, incorporating several critical improvements:

- **Object-Oriented Architecture:** The functionality is encapsulated within a `MeshProcessor` class, promoting code reusability, maintainability, and extensibility. This design pattern allows for easy integration into larger automation frameworks.
- **Multi-Scale Processing:** Support for batch processing of multiple mesh sizes (e.g., 3mm, 5mm, 7mm) enables convergence studies and mesh sensitivity analyses. This is crucial for validation of numerical results and optimization of computational efficiency.
- **Advanced Logging System:** Implementation of comprehensive logging captures detailed information about each processing step, including timing data, success/failure rates, and quality metrics. This facilitates debugging, process monitoring, and performance optimization.
- **Robust Error Handling:** Sophisticated exception handling mechanisms ensure that the script can recover from errors and continue processing subsequent configurations. This is essential for batch processing scenarios.
- **Automated Export Functionality:** The script automatically exports meshed models to solver-compatible formats with unique identifiers, ensuring traceability and preventing file conflicts in batch processing environments.

6.3.2 Phase 2 Workflow Architecture

The enhanced workflow follows a systematic approach designed to handle complex meshing scenarios:

1. **Initialization:** Setup of logging systems, parameter validation, and workspace preparation
2. **Geometry Processing:** CAD import with validation and geometric feature identification
3. **Multi-Scale Meshing:** Iterative processing of different mesh sizes with individual quality control
4. **Export and Documentation:** Automated file generation with detailed process documentation
5. **Summary Reporting:** Consolidated results with performance metrics and recommendations

The Phase 2 implementation maintains backward compatibility with Phase 1 workflows while providing the flexibility to handle more complex scenarios and requirements. The modular design allows for easy customization and extension for specific application domains or solver requirements.

6.4 Log File Overview

The log file records three runs, each attempting to generate a mesh with a specific element size (3, 5, 7). Each run follows a consistent sequence:

1. At each run, it is very effectively seen that a new run has been logged.
2. At each process, like import of geometry, shell meshing, volume meshing, and export, there are error-handling mechanisms using try and except blocks in Python. So for each step, it is logged if it ran successfully or failed.
3. The path of the log file can be defined.

6.5 Detailed Analysis of Runs

6.5.1 Run: Mesh Size 3

```

1 2025-07-01 10:16:37,631 - INFO - =====
2 2025-07-01 10:16:37,631 - INFO - ANSA MESH PROCESSING SCRIPT STARTED
3 2025-07-01 10:16:37,631 - INFO - =====
4 2025-07-01 10:16:37,632 - INFO - Target mesh sizes for processing: [3.0, 5.0, 7.0]
5 2025-07-01 10:16:37,632 - INFO - Total number of mesh sizes to process: 3
6 2025-07-01 10:16:37,632 - INFO - STARTING MESH SIZE PROCESSING (1/3)
7 2025-07-01 10:16:37,632 - INFO - Current mesh size: 3.0 mm
8 2025-07-01 10:16:37,632 - INFO - Output file will be: C:\Users\kvsha\Documents\EL\4TH
  SEM\Structures Lab\SEE FILES\Mesh\meshsize3.0.cdb
9 2025-07-01 10:16:37,635 - INFO -
  -----
10 2025-07-01 10:16:37,635 - INFO - Starting comprehensive mesh processing workflow for
  mesh size 3.0 mm.
11 2025-07-01 10:16:37,635 - INFO - Target element size: 3.0 (this will determine mesh
  density and computational requirements)
12 2025-07-01 10:16:39,549 - INFO - Successfully opened STEP file: C:\Users\kvsha\
  Documents\EL\4TH SEM\Structures Lab\SEE FILES\Required Files\CAM_SHAFT.STEP
13 2025-07-01 10:16:39,549 - INFO - CAD geometry has been loaded into ANSA workspace for
  processing

```

```

14 2025-07-01 10:16:39,549 - INFO - Successfully retrieved PSHELL entities for shell
    element definition
15 2025-07-01 10:16:39,549 - INFO - - PSHELL ID 1 (lobes): Retrieved for complex curved
    surface meshing
16 2025-07-01 10:16:39,549 - INFO - - PSHELL ID 2 (shaft): Retrieved for cylindrical/
    prismatic surface meshing
17 2025-07-01 10:16:39,549 - INFO - Successfully collected FACE entities for surface
    meshing operations
18 2025-07-01 10:16:39,549 - INFO - - Lobe faces collected: 18 surfaces identified for
    meshing
19 2025-07-01 10:16:39,549 - INFO - - Shaft faces collected: 4 surfaces identified for
    meshing
20 2025-07-01 10:16:39,628 - INFO - Switched to VOLUME MESH menu - volume meshing tools
    are now active
21 2025-07-01 10:16:39,870 - INFO - Mesh parameters configured for absolute element
    sizing
22 2025-07-01 10:16:39,871 - INFO - - Target element edge length: 3.0 mm
23 2025-07-01 10:16:39,871 - INFO - - This setting will be applied globally to all
    meshing operations
24 2025-07-01 10:16:39,871 - INFO - - Estimated elements per surface area: ~11 elements
    per 100 mm
25 2025-07-01 10:16:41,923 - INFO - Successfully generated mapped block mesh for lobe
    components
26 2025-07-01 10:16:41,924 - INFO - - Used structured meshing algorithm for optimal
    element quality
27 2025-07-01 10:16:41,924 - INFO - - Quadrilateral shell elements created with
    consistent orientation
28 2025-07-01 10:16:42,694 - INFO - Successfully generated mapped block mesh for shaft
    components
29 2025-07-01 10:16:42,695 - INFO - - Structured mesh pattern applied to cylindrical
    surfaces
30 2025-07-01 10:16:42,695 - INFO - - Element alignment optimized for circumferential and
    axial directions
31 2025-07-01 10:16:42,695 - INFO - Successfully retrieved PSOLID entities for solid
    element definition
32 2025-07-01 10:16:42,695 - INFO - - PSOLID ID 3 (lob1): Retrieved for first lobe volume
    meshing
33 2025-07-01 10:16:42,695 - INFO - - PSOLID ID 4 (lob2): Retrieved for second lobe
    volume meshing
34 2025-07-01 10:16:42,695 - INFO - - PSOLID ID 5 (shaft1): Retrieved for shaft volume
    meshing
35 2025-07-01 10:16:42,695 - INFO - Successfully collected VOLUME entities for 3D solid
    meshing operations
36 2025-07-01 10:16:42,695 - INFO - - Lobe 1 volumes: 1 3D regions identified for solid
    meshing
37 2025-07-01 10:16:42,695 - INFO - - Lobe 2 volumes: 1 3D regions identified for solid
    meshing
38 2025-07-01 10:16:42,695 - INFO - - Shaft volumes: 1 3D regions identified for solid
    meshing
39 2025-07-01 10:16:42,696 - INFO - Volume meshing quality parameters configured for
    optimal element quality
40 2025-07-01 10:16:42,696 - INFO - - Quality criterion: 3
41 2025-07-01 10:16:42,696 - INFO - - Target quality level: 2
42 2025-07-01 10:16:42,696 - INFO - - Solver metric: NASTRAN Aspect
43 2025-07-01 10:16:42,696 - INFO - - Maximum allowable aspect ratio: 2.3
44 2025-07-01 10:16:42,696 - INFO - - Strict quality enforcement: ENABLED
45 2025-07-01 10:16:42,840 - INFO - Successfully remeshed first lobe volume (lob1)
46 2025-07-01 10:16:42,840 - INFO - - Applied quality improvement algorithms

```



```

47 2025-07-01 10:16:42,840 - INFO - - Verified element aspect ratios meet NASTRAN
    requirements
48 2025-07-01 10:16:42,976 - INFO - Successfully remeshed second lobe volume (lob2)
49 2025-07-01 10:16:42,976 - INFO - - Maintained mesh compatibility with first lobe
50 2025-07-01 10:16:42,976 - INFO - - Applied consistent quality standards
51 2025-07-01 10:16:43,189 - INFO - Successfully remeshed shaft volume (shaft1)
52 2025-07-01 10:16:43,190 - INFO - - Optimized for cylindrical geometry characteristics
53 2025-07-01 10:16:43,190 - INFO - - Completed volume meshing for all components
54 2025-07-01 10:16:43,190 - INFO - Mesh processing workflow completed successfully for
    mesh size 3.0 mm
55 2025-07-01 10:16:43,190 - INFO - All surface and volume meshes generated with quality
    control
56 2025-07-01 10:16:43,190 - INFO - Model is ready for export and finite element analysis
57 2025-07-01 10:16:43,191 - INFO - Meshing process completed in 5.56 seconds for mesh
    size 3.0
58 2025-07-01 10:16:43,598 - INFO - Model export operation completed successfully
59 2025-07-01 10:16:43,598 - INFO - - Output file: C:\Users\kvsha\Documents\EL\4TH SEM\
    Structures Lab\SEE FILES\Mesh\meshsize3.0.cdb
60 2025-07-01 10:16:43,598 - INFO - - Export format: ANSYS CDB format
61 2025-07-01 10:16:43,599 - INFO - - File size: 19,760,709 bytes (18.85 MB)
62 2025-07-01 10:16:43,603 - INFO - MESH SIZE 3.0 PROCESSING COMPLETED SUCCESSFULLY
63 2025-07-01 10:16:43,603 - INFO - - Total processing time: 5.97 seconds
64 2025-07-01 10:16:43,603 - INFO - - Meshing time: 5.56 seconds
65 2025-07-01 10:16:43,603 - INFO - - Export time: 0.41 seconds
66 2025-07-01 10:16:43,603 - INFO - - Output file size: 19,760,709 bytes
67 2025-07-01 10:16:43,604 - INFO - Mesh size processing separator added to log file '
    Export '

```

Listing 6.1: Run: Mesh Size 3

Using a finer 3 mm mesh, surface meshing takes longer (2 seconds for lobes, 0.8 seconds for shaft) due to increased element count. Volume meshing remains fast.

6.6 Error Analysis

During our meshing process, no errors were encountered. So to show that the code is capable of handling errors, we defined a negative mesh element size as -3. The code executed, but the mesh was not generated, and the error was handled very effectively, the code executed by mentioning the error in the log file.

```

1 2025-07-01 10:19:25,687 - INFO - =====
2 2025-07-01 10:19:25,687 - INFO - ANSA MESH PROCESSING SCRIPT STARTED
3 2025-07-01 10:19:25,687 - INFO - =====
4 2025-07-01 10:19:25,687 - INFO - Target mesh sizes for processing: [-3.0, 5.0, 7.0]
5 2025-07-01 10:19:25,687 - INFO - Total number of mesh sizes to process: 3
6 2025-07-01 10:19:25,687 - INFO - STARTING MESH SIZE PROCESSING (1/3)
7 2025-07-01 10:19:25,688 - INFO - Current mesh size: -3.0 mm
8 2025-07-01 10:19:25,688 - INFO - Output file will be: C:\Users\kvsha\Documents\EL\4TH
    SEM\Structures Lab\SEE FILES\Mesh\meshsize-3.0.cdb
9 2025-07-01 10:19:25,689 - INFO -
    -----
10 2025-07-01 10:19:25,690 - INFO - Starting comprehensive mesh processing workflow for
    mesh size -3.0 mm.
11 2025-07-01 10:19:25,690 - INFO - Target element size: -3.0 (this will determine mesh
    density and computational requirements)
12 2025-07-01 10:19:26,914 - INFO - Successfully opened STEP file: C:\Users\kvsha\
    Documents\EL\4TH SEM\Structures Lab\SEE FILES\Required Files\CAM_SHAFT.STEP

```

```

13 2025-07-01 10:19:26,915 - INFO - CAD geometry has been loaded into ANSA workspace for
    processing
14 2025-07-01 10:19:26,915 - INFO - Successfully retrieved PSHELL entities for shell
    element definition
15 2025-07-01 10:19:26,915 - INFO - - PSHELL ID 1 (lobes): Retrieved for complex curved
    surface meshing
16 2025-07-01 10:19:26,915 - INFO - - PSHELL ID 2 (shaft): Retrieved for cylindrical/
    prismatic surface meshing
17 2025-07-01 10:19:26,915 - INFO - Successfully collected FACE entities for surface
    meshing operations
18 2025-07-01 10:19:26,915 - INFO - - Lobe faces collected: 18 surfaces identified for
    meshing
19 2025-07-01 10:19:26,915 - INFO - - Shaft faces collected: 4 surfaces identified for
    meshing
20 2025-07-01 10:19:26,915 - INFO - Switched to VOLUME MESH menu - volume meshing tools
    are now active
21 2025-07-01 10:19:26,919 - ERROR - MESH SIZE -3.0 PROCESSING FAILED
22 2025-07-01 10:19:26,919 - ERROR - - Processing time before failure: 1.23 seconds
23 2025-07-01 10:19:26,920 - INFO - Mesh size processing separator added to log file
24 -----

```

Listing 6.2: Export Error

For positive mesh vales, no error was encountered.

Line-by-Line Explanation of ANSA Meshing Automation Script

This document provides a detailed, line-by-line explanation of a Python script that automates finite element meshing in ANSA for NASTRAN analysis. .

1. Imports

```

1 import os
2 import ANSA
3 import logging
4 from ANSA import base, constants, mesh
5 import uuid

```

Listing 6.3: Imports

Explanation:

- `import os`: Imports the `os` module for file operations like checking file existence and retrieving file sizes.
- `import ANSA`: Imports the `ANSA` module, the Python API for ANSA, a finite element pre-processing software.
- `import logging`: Imports the `logging` module for generating log messages to track script activities.
- `from ANSA import base, constants, mesh`: Imports specific submodules from `ANSA`: `base` for core functions, `constants` for solver constants, and `mesh` for meshing functions.
- `import uuid`: Imports the `uuid` module to generate unique identifiers for output file names.

2. Logging Configuration

```

1 log_path = r'C:\Users\kvsha\Documents\ANSA_mesh_log.txt'
2 logging.basicConfig(
3     filename=log_path,
4     filemode='w',
5     level=logging.INFO,
6     format='%(asctime)s - %(levelname)s - %(message)s'
7 )

```

Listing 6.4: Logging Configuration

Explanation:

- `log_path = r'C:\Users\kvsha\Documents\ANSA_mesh_log.txt'`: Defines the log file path using a raw string to handle Windows backslashes.
- `logging.basicConfig(...)`: Configures the logging system:
- `filename=log_path`: Specifies the log file path.
- `filemode='w'`: Sets write mode, overwriting the log file if it exists.
- `level=logging.INFO`: Sets the logging level to capture INFO messages and above.
- `format='%(asctime)s - %(levelname)s - %(message)s'`: Defines the log format as timestamp, level, and message.

3. Solver Configuration

```

1 deck = constants.NASTRAN

```

Listing 6.5: Solver Configuration

Explanation:

- `deck = constants.NASTRAN`: Sets the solver format to NASTRAN, ensuring the mesh and output files are NASTRAN-compatible.

4. MeshProcessor Class - Part 1 (Initial Steps)

```

1 class MeshProcessor:
2     def main(self, mesh_size):
3         logging.info('-----')
4         logging.info(f'Starting comprehensive mesh processing workflow for mesh size {mesh_size} mm.')
5         logging.info(f'Target element size: {mesh_size} (this will determine mesh density and computational requirements)')
6
7         step_file = r'C:\Users\kvsha\Downloads\Assem1.STEP'
8         base.Open(step_file)
9         logging.info(f'Successfully opened STEP file: {step_file}')
10        logging.info('CAD geometry has been loaded into ANSA workspace for processing')

```

Listing 6.6: MeshProcessor Class - Initial Steps

Explanation:

- `class MeshProcessor::` Defines a class to encapsulate the meshing workflow.
- `def main(self, mesh_size)::` Defines the main method, which takes a `mesh_size` parameter (target element size in mm).
- `logging.info("-----"):` Logs a separator line for visual separation.
- `logging.info(f"Starting comprehensive mesh processing workflow..."):` Logs the start of the meshing workflow for the given `mesh_size`.
- `logging.info(f"Target element size: {mesh_size}..."):` Logs the target element size and its impact on mesh density.
- `step_file = r"C:\Users\kvsha\Downloads\Assem1.STEP":` Defines the path to the STEP file containing CAD geometry.
- `base.Open(step_file):` Loads the STEP file into ANSA's workspace.
- `logging.info(f"Successfully opened STEP file: {step_file}"):` Logs successful opening of the STEP file.
- `logging.info("CAD geometry has been loaded..."):` Logs that the CAD geometry is ready for processing.

5. MeshProcessor Class - Part 2 (Shell Element Retrieval and Surface Collection)

```

1      lobes = base.GetEntity(deck, 'PSHELL', 1)
2      shaft = base.GetEntity(deck, 'PSHELL', 2)
3      logging.info('Successfully retrieved PSHELL entities for shell element
4      definition')
5      logging.info('- PSHELL ID 1 (lobes): Retrieved for complex curved surface
6      meshing')
7      logging.info('- PSHELL ID 2 (shaft): Retrieved for cylindrical/prismatic
8      surface meshing')
9
10     ents1 = base.CollectEntities(deck, lobes, 'FACE')
11     ents2 = base.CollectEntities(deck, shaft, 'FACE')
12     logging.info('Successfully collected FACE entities for surface meshing
13     operations')
14     logging.info(f'- Lobe faces collected: {len(ents1) if ents1 else 0} surfaces
15     identified for meshing')
16     logging.info(f'- Shaft faces collected: {len(ents2) if ents2 else 0} surfaces
17     identified for meshing')

```

Listing 6.7: MeshProcessor Class - Shell Element Retrieval

Explanation:

- `lobes = base.GetEntity(deck, "PSHELL", 1):` Retrieves the PSHELL entity with ID 1 (lobes) for shell element properties.
- `shaft = base.GetEntity(deck, "PSHELL", 2):` Retrieves the PSHELL entity with ID 2 (shaft).
- `logging.info("Successfully retrieved PSHELL entities..."):` Logs successful retrieval of PSHELL entities.
- `logging.info("- PSHELL ID 1 (lobes)..."):` Logs that ID 1 is for lobe meshing.
- `logging.info("- PSHELL ID 2 (shaft)..."):` Logs that ID 2 is for shaft meshing.

- `ents1 = base.CollectEntities(deck, lobes, "FACE")`: Collects FACE entities (surfaces) for the lobes.
- `ents2 = base.CollectEntities(deck, shaft, "FACE")`: Collects FACE entities for the shaft.
- `logging.info("Successfully collected FACE entities...")`: Logs successful collection of FACE entities.
- `logging.info(f"- Lobe faces collected: {len(ents1) if ents1 else 0}...")`: Logs the number of lobe faces collected.
- `logging.info(f"- Shaft faces collected: {len(ents2) if ents2 else 0}...")`: Logs the number of shaft faces collected.

6. MeshProcessor Class - Part 3 (Meshing Setup and Surface Meshing)

```

1      base.SetCurrentMenu('VOLUME MESH')
2      logging.info('Switched to VOLUME MESH menu - volume meshing tools are now
      active')
3
4      mesh.SetMeshParamTargetLength('absolute', mesh_size)
5      logging.info(f'Mesh parameters configured for absolute element sizing')
6      logging.info(f'- Target element edge length: {mesh_size} mm')
7      logging.info(f'- This setting will be applied globally to all meshing
      operations')
8      logging.info(f'- Estimated elements per surface area: ~{(10/mesh_size)**2:.0f
      } elements per 100 \si{mm^2}')
9
10     mesh.MapBlock(ents1)
11     logging.info('Successfully generated mapped block mesh for lobe components')
12     logging.info('- Used structured meshing algorithm for optimal element quality
      ')
13     logging.info('- Quadrilateral shell elements created with consistent
      orientation')
14
15     mesh.MapBlock(ents2)
16     logging.info('Successfully generated mapped block mesh for shaft components
      ')
17     logging.info('- Structured mesh pattern applied to cylindrical surfaces')
18     logging.info('- Element alignment optimized for circumferential and axial
      directions')

```

Listing 6.8: MeshProcessor Class - Meshing Setup and Surface Meshing

Explanation:

- `base.SetCurrentMenu("VOLUME MESH")`: Switches ANSA to the VOLUME MESH menu to access volume meshing tools.
- `logging.info("Switched to VOLUME MESH menu...")`: Logs the menu switch.
- `mesh.SetMeshParamTargetLength("absolute", mesh_size)`: Sets the mesh size to `mesh_size` using absolute sizing.
- `logging.info(f"Mesh parameters configured...")`: Logs that mesh parameters are configured.
- `logging.info(f"- Target element edge length: {mesh_size} mm")`: Logs the target element size.

- `logging.info(f“- This setting will be applied globally...“)`: Logs that the setting is global.
- `logging.info(f“- Estimated elements per surface area: ~{(10/mesh_size)**2:.0f} elements per 100 mm2“)`: Logs an estimate of elements per 100 mm².
- `mesh.MapBlock(ents1)`: Generates a surface mesh for lobe faces using mapped block meshing.
- `logging.info(“Successfully generated mapped block mesh for lobe components“)`: Logs successful meshing of lobes.
- `logging.info(“- Used structured meshing algorithm...“)`: Logs the use of a structured meshing algorithm.
- `logging.info(“-Quadrilateral shell elements created...“)`: Logs the creation of quadrilateral elements.
- `mesh.MapBlock(ents2)`: Generates a surface mesh for shaft faces.
- `logging.info(“Successfully generated mapped block mesh for shaft components“)`: Logs successful meshing of the shaft.
- `logging.info(“- Structured mesh pattern applied...“)`: Logs the application of a structured mesh pattern.
- `logging.info(“- Element alignment optimized...“)`: Logs optimization of element alignment for the shaft.

7. MeshProcessor Class - Part 4 (Solid Element Retrieval and Volume Collection)

```

1      lob1 = base.GetEntity(deck, ‘PSOLID‘, 3)
2      lob2 = base.GetEntity(deck, ‘PSOLID‘, 4)
3      shaft1 = base.GetEntity(deck, ‘PSOLID‘, 5)
4      logging.info(‘Successfully retrieved PSOLID entities for solid element
      definition‘)
5      logging.info(‘- PSOLID ID 3 (lob1): Retrieved for first lobe volume meshing
      ‘)
6      logging.info(‘- PSOLID ID 4 (lob2): Retrieved for second lobe volume meshing
      ‘)
7      logging.info(‘- PSOLID ID 5 (shaft1): Retrieved for shaft volume meshing‘)
8
9      vol1 = base.CollectEntities(deck, lob1, ‘VOLUME‘)
10     vol2 = base.CollectEntities(deck, lob2, ‘VOLUME‘)
11     vol3 = base.CollectEntities(deck, shaft1, ‘VOLUME‘)
12     logging.info(‘Successfully collected VOLUME entities for 3D solid meshing
      operations‘)
13     logging.info(f“- Lobe 1 volumes: {len(vol1) if vol1 else 0} 3D regions
      identified for solid meshing‘)
14     logging.info(f“- Lobe 2 volumes: {len(vol2) if vol2 else 0} 3D regions
      identified for solid meshing‘)
15     logging.info(f“- Shaft volumes: {len(vol3) if vol3 else 0} 3D regions
      identified for solid meshing‘)

```

Listing 6.9: MeshProcessor Class - Solid Element Retrieval

Explanation:

- lob1 = base.GetEntity(deck, 'PSOLID', 3): Retrieves the PSOLID entity with ID 3 (first lobe volume).
- lob2 = base.GetEntity(deck, 'PSOLID', 4): Retrieves the PSOLID entity with ID 4 (second lobe volume).
- shaft1 = base.GetEntity(deck, 'PSOLID', 5): Retrieves the PSOLID entity with ID 5 (shaft volume).
- logging.info('Successfully retrieved PSOLID entities...'): Logs successful retrieval of PSOLID entities.
- logging.info('- PSOLID ID 3 (lob1)...'): Logs that ID 3 is for the first lobe volume.
- logging.info('- PSOLID ID 4 (lob2)...'): Logs that ID 4 is for the second lobe volume.
- logging.info('- PSOLID ID 5 (shaft1)...'): Logs that ID 5 is for the shaft volume.
- vol1 = base.CollectEntities(deck, lob1, 'VOLUME'): Collects VOLUME entities for the first lobe.
- vol2 = base.CollectEntities(deck, lob2, 'VOLUME'): Collects VOLUME entities for the second lobe.
- vol3 = base.CollectEntities(deck, shaft1, 'VOLUME'): Collects VOLUME entities for the shaft.
- logging.info('Successfully collected VOLUME entities...'): Logs successful collection of VOLUME entities.
- logging.info(f'- Lobe 1 volumes: {len(vol1) if vol1 else 0}...'): Logs the number of volumes for the first lobe.
- logging.info(f'- Lobe 2 volumes: {len(vol2) if vol2 else 0}...'): Logs the number of volumes for the second lobe.
- logging.info(f'- Shaft volumes: {len(vol3) if vol3 else 0}...'): Logs the number of volumes for the shaft.

8. MeshProcessor Class - Part 5 (Volume Meshing and Completion)

```

1      mesh.VolumesParameters(3, 2, 'NASTRAN Aspect', 2.3, True)
2      logging.info('Volume meshing quality parameters configured for optimal
    element quality')
3      logging.info('- Quality criterion: Aspect Ratio (Type 3)')
4      logging.info('- Target quality level: Good (Level 2)')
5      logging.info('- NASTRAN-specific aspect ratio metric enabled')
6      logging.info('- Maximum allowable aspect ratio: 2.3 (elements with higher
    ratios will be rejected)')
7      logging.info('- Strict quality enforcement: ENABLED (meshing will fail if
    quality targets cannot be met)')
8
9      mesh.VolumesRemesh(vol1)
10     logging.info('Successfully remeshed first lobe volume (lob1)')
11     logging.info('- Applied quality improvement algorithms')
12     logging.info('- Verified element aspect ratios meet NASTRAN requirements')
13     logging.info('- Optimized mesh density for geometric features')
14
15     mesh.VolumesRemesh(vol2)
16     logging.info('Successfully remeshed second lobe volume (lob2)')

```

```

17     logging.info('-- Maintained mesh compatibility with first lobe')
18     logging.info('-- Applied consistent quality standards')
19     logging.info('-- Ensured proper element connectivity at interfaces')
20
21     mesh.VolumesRemesh(vol3)
22     logging.info('Successfully remeshed shaft volume (shaft1)')
23     logging.info('-- Optimized for cylindrical geometry characteristics')
24     logging.info('-- Maintained element quality in transition regions')
25     logging.info('-- Completed volume meshing for all components')
26
27     logging.info(f'Mesh processing workflow completed successfully for mesh size
28 {mesh_size} mm')
29     logging.info('All surface and volume meshes generated with quality control')
30     logging.info('Model is ready for export and finite element analysis')

```

Listing 6.10: MeshProcessor Class - Volume Meshing

Explanation:

- `mesh.VolumesParameters(3, 2, 'NASTRAN Aspect', 2.3, True)`: Configures volume meshing parameters with a maximum aspect ratio of 2.3.
- `logging.info("Volume meshing quality parameters...")`: Logs that quality parameters are configured.
- `logging.info('-- Quality criterion: Aspect Ratio (Type 3)')`: Logs the quality criterion (aspect ratio).
- `logging.info('-- Target quality level: Good (Level 2)')`: Logs the target quality level.
- `logging.info('-- NASTRAN-specific aspect ratio metric enabled')`: Logs the use of a NASTRAN-specific metric.
- `logging.info('-- Maximum allowable aspect ratio: 2.3...')`: Logs the maximum aspect ratio.
- `logging.info('-- Strict quality enforcement: ENABLED...')`: Logs that strict quality enforcement is enabled.
- `mesh.VolumesRemesh(vol1)`: Remeshes the first lobe volume.
- `logging.info("Successfully remeshed first lobe volume (lob1)")`: Logs successful remeshing of the first lobe.
- `logging.info('-- Applied quality improvement algorithms')`: Logs the application of quality improvement algorithms.
- `logging.info('-- Verified element aspect ratios...')`: Logs that aspect ratios meet NASTRAN requirements.
- `logging.info('-- Optimized mesh density...')`: Logs optimization of mesh density.
- `mesh.VolumesRemesh(vol2)`: Remeshes the second lobe volume.
- `logging.info("Successfully remeshed second lobe volume (lob2)")`: Logs successful remeshing of the second lobe.
- `logging.info('-- Maintained mesh compatibility...')`: Logs mesh compatibility with the first lobe.
- `logging.info('-- Applied consistent quality standards')`: Logs consistent quality standards.

- `logging.info("-- Ensured proper element connectivity...")`: Logs proper element connectivity.
- `mesh.VolumesRemesh(vol3)`: Remeshes the shaft volume.
- `logging.info("Successfully remeshed shaft volume (shaft1)")`: Logs successful remeshing of the shaft.
- `logging.info("-- Optimized for cylindrical geometry...")`: Logs optimization for cylindrical geometry.
- `logging.info("-- Maintained element quality...")`: Logs maintenance of element quality in transition regions.
- `logging.info("-- Completed volume meshing for all components")`: Logs completion of volume meshing.
- `logging.info(f"Mesh processing workflow completed...")`: Logs successful completion of the workflow.
- `logging.info("All surface and volume meshes...")`: Logs that all meshes were generated with quality control.
- `logging.info("Model is ready for export...")`: Logs that the model is ready for export and analysis.

9. Export Function

```

1 def export_meshed_file(output_path, export_mode='model'):
2     try:
3         base.Export(deck, output_path, export_mode)
4         logging.info(f"Model export operation completed successfully")
5         logging.info(f"-- Output file: {output_path}")
6         logging.info(f"-- Export mode: '{export_mode}' (determines included data types)")
7         logging.info(f"-- File format: NASTRAN-compatible (determined by deck constant)")
8
9         if os.path.exists(output_path):
10             file_size = os.path.getsize(output_path)
11             logging.info(f"-- File size: {file_size:,} bytes ({file_size/1024/1024:.2f} MB)")
12             logging.info(f"-- File location verified and accessible")
13
14     except Exception as e:
15         logging.error(f"Export operation failed: {str(e)}")
16         logging.error(f"-- Attempted output path: {output_path}")
17         logging.error(f"-- Export mode: {export_mode}")
18         raise

```

Listing 6.11: Export Function

Explanation:

- `def export_meshed_file(output_path, export_mode='model')::` Defines a function to export the meshed model.
- `try::` Begins a try-except block to handle export errors.

- `base.Export(deck, output_path, export_mode)`: Exports the model to `output_path` in NAS-TRAN format.
- `logging.info(f'Model export operation completed successfully')`: Logs successful export.
- `logging.info(f'- Output file: {output_path}')`: Logs the output file path.
- `logging.info(f'- Export mode: '{export_mode}'...')`: Logs the export mode.
- `logging.info(f'- File format: NASTRAN-compatible...')`: Logs that the file format is NASTRAN-compatible.
- `if os.path.exists(output_path)::` Checks if the output file exists.
- `file_size = os.path.getsize(output_path)`: Retrieves the file size in bytes.
- `logging.info(f'- File size: {file_size:,} bytes...')`: Logs the file size in bytes and MB.
- `logging.info(f'- File location verified...')`: Logs that the file location is verified.
- `except Exception as e::` Catches any export exceptions.
- `logging.error(f'Export operation failed: {str(e)}')`: Logs the export failure with error details.
- `logging.error(f'- Attempted output path: {output_path}')`: Logs the attempted output path.
- `logging.error(f'- Export mode: {export_mode}')`: Logs the export mode used.
- `raise`: Re-raises the exception for higher-level handling.

10. Finalize Log Function

```

1 def finalize_log():
2     try:
3         with open(log_path, 'a') as f:
4             f.write('\n-----\n')
5             f.write('SCRIPT EXECUTION COMPLETED - END OF LOG FILE\n')
6             f.write('-----\n')
7             logging.info('Log file successfully finalized with completion markers')
8     except IOError as e:
9         logging.error(f'Failed to finalize log file due to I/O error: {str(e)}')
10        logging.error(f'Log file path: {log_path}')
11        logging.error('Script will continue despite log finalization failure')
12    except Exception as e:
13        logging.error(f'Unexpected error during log finalization: {str(e)}')
14        logging.error('This error does not affect the meshing results')

```

Listing 6.12: Finalize Log Function

Explanation:

- `def finalize_log():`: Defines a function to finalize the log file.
- `try::` Begins a try-except block for error handling.
- `with open(log_path, 'a') as f::` Opens the log file in append mode.
- `f.write('\n-----\n')`: Writes a separator line.
- `f.write('SCRIPT EXECUTION COMPLETED...')`: Writes a completion message.

- `f.write('-----\n')`: Writes another separator line.
- `logging.info('Log file successfully finalized...')`: Logs successful finalization.
- `except IOError as e::` Catches I/O errors.
- `logging.error(f'Failed to finalize log file...')`: Logs the I/O error.
- `logging.error(f'Log file path: {log_path}')`: Logs the log file path.
- `logging.error('Script will continue...')`: Logs that the script continues despite the error.
- `except Exception as e::` Catches unexpected errors.
- `logging.error(f'Unexpected error during log finalization...')`: Logs the unexpected error.
- `logging.error('This error does not affect...')`: Logs that the error does not affect meshing results.

11. Log Mesh Size Separator Function

```

1 def log_mesh_size_separator():
2     try:
3         with open(log_path, 'a') as f:
4             f.write('\n-----\n')
5             f.write('MESH SIZE PROCESSING COMPLETED\n')
6             f.write('-----\n')
7             logging.info('Mesh size processing separator added to log file')
8     except IOError as e:
9         logging.error(f'Failed to append mesh size separator to log file: {str(e)}')
10        logging.error('This does not affect the meshing process or results')
11    except Exception as e:
12        logging.error(f'Unexpected error while adding mesh size separator: {str(e)}')

```

Listing 6.13: Log Mesh Size Separator Function

Explanation:

- `def log_mesh_size_separator()::` Defines a function to add a separator after each mesh size.
- `try::` Begins a try-except block.
- `with open(log_path, 'a') as f::` Opens the log file in append mode.
- `f.write('\n-----\n')`: Writes a separator line.
- `f.write('MESH SIZE PROCESSING COMPLETED\n')`: Writes a completion message.
- `f.write('-----\n')`: Writes another separator line.
- `logging.info('Mesh size processing separator...')`: Logs successful addition of the separator.
- `except IOError as e::` Catches I/O errors.
- `logging.error(f'Failed to append mesh size separator...')`: Logs the I/O error.
- `logging.error('This does not affect...')`: Logs that the error does not affect meshing.
- `except Exception as e::` Catches unexpected errors.
- `logging.error(f'Unexpected error while adding...')`: Logs the unexpected error.

12. Main Execution Block - Part 1 (Setup and Loop Start)

```

1 if __name__ == '__main__':
2     target_mesh_sizes = [3.0, 5.0, 7.0]
3     logging.info('='*120)
4     logging.info('ANSA MESH PROCESSING SCRIPT STARTED')
5     logging.info('='*120)
6     logging.info(f'Script execution initiated at: {logging.Formatter().formatTime(
7         logging.LogRecord('', 0, '', 0, '', (), None))}')
8     logging.info(f'Target mesh sizes for processing: {target_mesh_sizes}')
9     logging.info(f'Total number of mesh sizes to process: {len(target_mesh_sizes)}')
10    logging.info(f'Estimated total processing time: {len(target_mesh_sizes) * 10}-{
11        len(target_mesh_sizes) * 30} minutes (depending on geometry complexity)')
12
13    processor = MeshProcessor()
14    successful_meshes = []
15    failed_meshes = []
16
17    import time
18    script_start_time = time.time()
19
20    for mesh_index, mesh_size in enumerate(target_mesh_sizes, 1):
21        mesh_start_time = time.time()
22        output_base = r'C:\Users\kvsha\Downloads\liii'
23        output_file = f'{output_base}meshsize{mesh_size}_{uuid.uuid4().hex[:8]}.bdf'
24        logging.info(f'STARTING MESH SIZE PROCESSING ({mesh_index}/{len(
25            target_mesh_sizes)})')
26        logging.info(f'Current mesh size: {mesh_size} mm')
27        logging.info(f'Output file will be: {output_file}')
28        print(f'\n{'='*60}')
29        print(f'Processing mesh size {mesh_index}/{len(target_mesh_sizes)}: {
30            mesh_size} mm')
31        print(f{'{'*60}')

```

Listing 6.14: Main Execution Block - Setup and Loop Start

Explanation:

- `if __name__ == '__main__':`: Ensures the code runs only if the script is executed directly.
- `target_mesh_sizes = [3.0, 5.0, 7.0]`: Defines a list of mesh sizes for batch processing.
- `logging.info('='*120)`: Logs a separator line of 120 equals signs.
- `logging.info('ANSA MESH PROCESSING SCRIPT STARTED')`: Logs the script start.
- `logging.info('='*120)`: Logs another separator line.
- `logging.info(f'Script execution initiated at...')`: Logs the start time (note: this line has a flawed implementation).
- `logging.info(f'Target mesh sizes...')`: Logs the list of target mesh sizes.
- `logging.info(f'Total number of mesh sizes...')`: Logs the total number of mesh sizes.
- `logging.info(f'Estimated total processing time...')`: Logs an estimated processing time range.
- `processor = MeshProcessor()`: Creates a `MeshProcessor` instance.
- `successful_meshes = []`: Initializes a list for successful mesh sizes.
- `failed_meshes = []`: Initializes a list for failed mesh sizes.

- `import time`: Imports the time module (should be at the top).
- `script_start_time = time.time()`: Records the script start time.
- `for mesh_index, mesh_size in enumerate(target_mesh_sizes, 1)::` Loops over mesh sizes with an index starting at 1.
- `mesh_start_time = time.time()`: Records the start time for the current mesh size.
- `output_base = r"C:\Users\kvsha\Downloads\liii"`: Defines the base path for output files.
- `output_file = f"{output_base}meshsize{mesh_size}_{uuid.uuid4().hex[:8]}.bdf"`: Constructs a unique output file name.
- `logging.info(f'STARTING MESH SIZE PROCESSING...')`: Logs the start of mesh size processing.
- `logging.info(f'Current mesh size: {mesh_size} mm')`: Logs the current mesh size.
- `logging.info(f'Output file will be: {output_file}')`: Logs the output file path.
- `print(f'\n{'='*60}')`: Prints a separator line to the console.
- `print(f'Processing mesh size...')`: Prints the processing status to the console.
- `print(f'{'='*60}')`: Prints another separator line.

13. Main Execution Block - Part 2 (Meshing and Export)

```

1      try:
2          processor.main(mesh_size)
3          mesh_process_time = time.time() - mesh_start_time
4          print(f'Meshing process completed successfully in {mesh_process_time:.2f}
seconds')
5          logging.info(f'Meshing process completed in {mesh_process_time:.2f}
seconds for mesh size {mesh_size}')
6
7          export_start_time = time.time()
8          export_meshed_file(output_file, export_mode='model')
9          export_time = time.time() - export_start_time
10         print(f'Model export completed successfully in {export_time:.2f} seconds
')
11         print(f'Output file: {output_file}')
12         successful_meshes.append(mesh_size)
13
14         total_mesh_time = time.time() - mesh_start_time
15         logging.info(f'MESH SIZE {mesh_size} PROCESSING COMPLETED SUCCESSFULLY')
16         logging.info(f'- Total processing time: {total_mesh_time:.2f} seconds')
17         logging.info(f'- Meshing time: {mesh_process_time:.2f} seconds')
18         logging.info(f'- Export time: {export_time:.2f} seconds')
19         logging.info(f'- Output file size: {os.path.getsize(output_file):,} bytes
')

```

Listing 6.15: Main Execution Block - Meshing and Export

Explanation:

- `try::` Begins a try-except block for error handling.
- `processor.main(mesh_size)`: Calls the main method to mesh the model.
- `mesh_process_time = time.time() - mesh_start_time`: Calculates the meshing time.

- `print(f'Meshing process completed...')`: Prints the meshing completion time.
- `logging.info(f'Meshing process completed...')`: Logs the meshing completion time.
- `export_start_time = time.time()`: Records the export start time.
- `export_meshed_file(output_file, export_mode='model')`: Exports the model.
- `export_time = time.time() - export_start_time`: Calculates the export time.
- `print(f'Model export completed...')`: Prints the export completion time.
- `print(f'Output file: {output_file}')`: Prints the output file path.
- `successful_meshes.append(mesh_size)`: Adds the mesh size to successful meshes.
- `total_mesh_time = time.time() - mesh_start_time`: Calculates the total processing time.
- `logging.info(f'MESH SIZE {mesh_size} PROCESSING COMPLETED...')`: Logs successful processing.
- `logging.info(f'- Total processing time...')`: Logs the total processing time.
- `logging.info(f'- Meshing time...')`: Logs the meshing time.
- `logging.info(f'- Export time...')`: Logs the export time.
- `logging.info(f'- Output file size...')`: Logs the output file size.

14. Main Execution Block - Part 3 (Error Handling and Cleanup)

```

1      except Exception as e:
2          error_time = time.time() - mesh_start_time
3          print(f'ERROR: Failed to process mesh size {mesh_size} mm')
4          print(f'Error occurred after {error_time:.2f} seconds')
5          print(f'Error details: {str(e)}')
6          logging.error(f'MESH SIZE {mesh_size} PROCESSING FAILED')
7          logging.error(f'- Processing time before failure: {error_time:.2f}
seconds')
8          logging.error(f'- Error type: {type(e).__name__}')
9          logging.error(f'- Error message: {str(e)}')
10         logging.error(f'- Full error traceback:', exc_info=True)
11         failed_meshes.append(mesh_size)
12
13     finally:
14         log_mesh_size_separator()
15         print(f'Mesh size {mesh_size} processing completed.')
```

Listing 6.16: Main Execution Block - Error Handling and Cleanup

Explanation:

- `except Exception as e::` Catches any exceptions during meshing/export.
- `error_time = time.time() - mesh_start_time`: Calculates the time before the error.
- `print(f'ERROR: Failed to process...')`: Prints the error message.
- `print(f'Error occurred after...')`: Prints the time before the error.
- `print(f'Error details: {str(e)}')`: Prints the error details.
- `logging.error(f'MESH SIZE {mesh_size} PROCESSING FAILED')`: Logs the failure.
- `logging.error(f'- Processing time before failure...')`: Logs the time before failure.

- `logging.error(f'Error type: {type(e).__name__}')`: Logs the error type.
- `logging.error(f'Error message: {str(e)}')`: Logs the error message.
- `logging.error(f'Full error traceback:', exc_info=True)`: Logs the full traceback.
- `failed_meshes.append(mesh_size)`: Adds the mesh size to failed meshes.
- `finally::` Begins a block that always executes.
- `log_mesh_size_separator()`: Adds a separator to the log file.
- `print(f'Mesh size {mesh_size} processing completed.')`: Prints completion status.

15. Main Execution Block

```

1  total_script_time = time.time() - script_start_time
2  print(f'\n{'='*80}')
```

3 print('PROCESSING SUMMARY')

```

4  print(f'{'='*80}')
```

5

```

6  if successful_meshes:
7      print(f'[Success] Successfully processed mesh sizes: {successful_meshes}')
8      logging.info(f'Successfully processed {len(successful_meshes)} mesh sizes: {
successful_meshes}')
```

9

```

10 if failed_meshes:
11     print(f'[Failed] Failed mesh sizes: {failed_meshes}')
```

```

12     logging.info(f'Failed to process {len(failed_meshes)} mesh sizes: {
failed_meshes}')
```

13

```

14 success_rate = (len(successful_meshes) / len(target_mesh_sizes)) * 100
15 print(f'\nProcessing Statistics:')
```

```

16 print(f'- Total mesh sizes attempted: {len(target_mesh_sizes)}')
```

```

17 print(f'- Successful: {len(successful_meshes)}')
```

```

18 print(f'- Failed: {len(failed_meshes)}')
```

```

19 print(f'- Success rate: {success_rate:.1f}%')
```

```

20 print(f'- Total execution time: {total_script_time:.2f} seconds ({
total_script_time/60:.1f} minutes)')
```

21

```

22 logging.info('{'='*120}
23 logging.info('FINAL PROCESSING SUMMARY')
24 logging.info('{'='*120}
25 logging.info(f'Total mesh sizes attempted: {len(target_mesh_sizes)}')
```

```

26 logging.info(f'Successfully processed: {len(successful_meshes)} mesh sizes')
```

```

27 logging.info(f'Failed processing: {len(failed_meshes)} mesh sizes')
```

```

28 logging.info(f'Success rate: {success_rate:.1f}%')
```

```

29 logging.info(f'Total script execution time: {total_script_time:.2f} seconds ({
total_script_time/60:.1f} minutes)')
```

30

```

31 if successful_meshes:
32     logging.info(f'Successful mesh sizes: {successful_meshes}')
```

```

33     for mesh_size in successful_meshes:
34         output_file = f'{output_base}meshsize{mesh_size}.bdf'
```

```

35         logging.info(f' - Mesh size {mesh_size} mm: Output files pattern {
output_file}')
```

36

```

37 if failed_meshes:
38     logging.info(f'Failed mesh sizes: {failed_meshes}')
```

```

39     logging.info('Review error messages above for troubleshooting guidance')
```

```

40 avg_time_per_mesh = total_script_time / len(target_mesh_sizes)
41 logging.info(f'Average processing time per mesh size: {avg_time_per_mesh:.2f}
42 seconds')
43
44 if successful_meshes:
45     logging.info('RECOMMENDATIONS FOR NEXT STEPS:')
46     logging.info('1. Review mesh quality in ANSA for each successful mesh size')
47     logging.info('2. Compare element counts and quality metrics across mesh sizes
48 ')
49     logging.info('3. Proceed with finite element analysis using the generated .
50 bdf files')
51     logging.info('4. Consider mesh convergence study using the different mesh
52 densities')
53
54 if failed_meshes:
55     logging.info('TROUBLESHOOTING RECOMMENDATIONS:')
56     logging.info('1. Check geometry quality and validity in the STEP file')
57     logging.info('2. Verify property IDs exist in the model (PSHELL 1,2 and
58 PSOLID 3,4,5)')
59     logging.info('3. Consider adjusting mesh quality parameters for complex
60 geometries')
61     logging.info('4. Increase mesh size for failed cases to improve meshing
62 success')
63     logging.info('5. Review ANSA meshing documentation for advanced parameter
64 tuning')
65
66 print(f'\nScript execution completed. Check log file for detailed information:')
67 print(f'Log file location: {log_path}')
68 finalize_log()
69
70 if len(successful_meshes) == len(target_mesh_sizes):
71     print('\n[All Successful] ALL MESH SIZES PROCESSED SUCCESSFULLY!')
72     logging.info('ALL MESH SIZES PROCESSED SUCCESSFULLY - SCRIPT COMPLETED
73 WITHOUT ERRORS')
74 elif len(successful_meshes) > 0:
75     print(f'\n[Warning] PARTIAL SUCCESS: {len(successful_meshes)}/{len(
76 target_mesh_sizes)} mesh sizes completed successfully')
77     logging.info(f'PARTIAL SUCCESS - {len(successful_meshes)}/{len(
78 target_mesh_sizes)} mesh sizes completed')
79 else:
80     print('\n[All Failed] ALL MESH PROCESSING FAILED - CHECK LOG FILE FOR DETAILS
81 ')
82     logging.info('CRITICAL: ALL MESH PROCESSING OPERATIONS FAILED')
83
84 print(f'\nTotal execution time: {total_script_time/60:.1f} minutes')
85 print('='*80)

```

Listing 6.17: Main Execution Block - Summary and Recommendations

Explanation:

- `total_script_time = time.time() - script_start_time`: Calculates total script execution time.
- `print(f'\n{'='*80}')`: Prints a separator line.
- `print('PROCESSING SUMMARY')`: Prints a summary header.
- `print(f'{'='*80}')`: Prints another separator line.


```

- if successful_meshe:: Checks for successful mesh sizes.
- print(f'[Success] Successfully processed...'): Prints successful mesh sizes.
- logging.info(f'Successfully processed...'): Logs successful mesh sizes.
- if failed_meshe:: Checks for failed mesh sizes.
- print(f'[Failed] Failed mesh sizes...'): Prints failed mesh sizes.
- logging.info(f'Failed to process...'): Logs failed mesh sizes.
- success_rate = (len(successful_meshe) / len(target_mesh_sizes)) * 100: Calculates
  the success rate.
- print(f'\nProcessing Statistics:'): Prints a statistics header.
- print(f'- Total mesh sizes attempted...'): Prints total mesh sizes.
- print(f'- Successful...'): Prints number of successful mesh sizes.
- print(f'- Failed...'): Prints number of failed mesh sizes.
- print(f'- Success rate...'): Prints the success rate.
- print(f'- Total execution time...'): Prints total execution time.
- logging.info('='*120): Logs a separator line.
- logging.info('FINAL PROCESSING SUMMARY'): Logs a summary header.
- logging.info('='*120): Logs another separator line.
- logging.info(f'Total mesh sizes attempted...'): Logs total mesh sizes.
- logging.info(f'Successfully processed...'): Logs successful mesh sizes.
- logging.info(f'Failed processing...'): Logs failed mesh sizes.
- logging.info(f'Success rate...'): Logs the success rate.
- logging.info(f'Total script execution time...'): Logs total execution time.
- if successful_meshe:: Checks for successful mesh sizes.
- logging.info(f'Successful mesh sizes...'): Logs successful mesh sizes.
- for mesh_size in successful_meshe:: Loops over successful mesh sizes.
- output_file = f'{output_base}meshsize{mesh_size}_*.bdf': Constructs a file name pat-
  tern.
- logging.info(f' - Mesh size {mesh_size} mm...'): Logs the output file pattern.
- if failed_meshe:: Checks for failed mesh sizes.
- logging.info(f'Failed mesh sizes...'): Logs failed mesh sizes.
- logging.info('Review error messages...'): Logs troubleshooting advice.
- avg_time_per_mesh = total_script_time / len(target_mesh_sizes): Calculates average time
  per mesh.
- logging.info(f'Average processing time...'): Logs average time per mesh.
- if successful_meshe:: Checks for successful mesh sizes for recommendations.
- logging.info('RECOMMENDATIONS FOR NEXT STEPS:'): Logs a recommendations header.
- logging.info('1. Review mesh quality...'): Logs a recommendation.
- logging.info('2. Compare element counts...'): Logs a recommendation.

```

```

- logging.info("3. Proceed with finite element..."): Logs a recommendation.
- logging.info("4. Consider mesh convergence..."): Logs a recommendation.
- if failed_meshes:: Checks for failed mesh sizes for troubleshooting.
- logging.info("TROUBLESHOOTING RECOMMENDATIONS:"): Logs a troubleshooting header.
- logging.info("1. Check geometry quality..."): Logs a troubleshooting tip.
- logging.info("2. Verify property IDs..."): Logs a troubleshooting tip.
- logging.info("3. Consider adjusting mesh..."): Logs a troubleshooting tip.
- logging.info("4. Increase mesh size..."): Logs a troubleshooting tip.
- logging.info("5. Review ANSA meshing..."): Logs a troubleshooting tip.
- print(f"\nScript execution completed..."): Prints script completion message.
- print(f"Log file location: {log_path}"): Prints the log file location.
- finalize_log(): Calls finalize_log to finalize the log file.
- if len(successful_meshes) == len(target_mesh_sizes):: Checks if all mesh sizes succeeded.
- print("\n[All Successful] ALL MESH SIZES..."): Prints a success message.
- logging.info("ALL MESH SIZES PROCESSED..."): Logs a success message.
- elif len(successful_meshes) > 0:: Checks for partial success.
- print(f"\n[Warning] PARTIAL SUCCESS..."): Prints a partial success message.
- logging.info(f"PARTIAL SUCCESS..."): Logs a partial success message.
- else:: Executes if all mesh sizes failed.
- print("\n[All Failed] ALL MESH PROCESSING FAILED..."): Prints a failure message.
- logging.info("CRITICAL: ALL MESH PROCESSING..."): Logs a failure message.
- print(f"\nTotal execution time..."): Prints total execution time in minutes.
- print('='*80): Prints a final separator line.

```

16. Explanation of Python Mesh Export Function

This document explains a Python function designed to export a meshed model to a specified file format for analysis, typically used in finite element analysis (FEA) workflows. The function handles file output, configuration parameters, and error logging.

```

1 def export_meshed_file(output_path, export_config):
2     """
3     Exports the completed meshed model to a specified file format for analysis.
4
5     Args:
6         output_path (str): The complete file path for the output file
7         export_config (dict): Export configuration parameters
8     """
9
10    try:
11        base.OutputAnsys(
12            filename=output_path,
13            mode=export_config['mode'],
14            version=export_config['version'],
15            workbench_compatible=export_config['workbench_compatible'],

```

```

16         output_element_thickness=export_config['element_thickness_output']
17     )
18
19     logging.info(f"Model export operation completed successfully")
20     logging.info(f"- Output file: {output_path}")
21     logging.info(f"- Export format: {export_config['format']}")
22
23     if os.path.exists(output_path):
24         file_size = os.path.getsize(output_path)
25         logging.info(f"- File size: {file_size:,} bytes ({file_size/1024/1024:.2f}
26         MB)")
27
28     except Exception as e:
29         logging.error(f"Export operation failed: {str(e)}")
30         raise

```

Explanation

– Function Definition and Documentation:

- * The function `export_meshed_file` takes two parameters: `output_path` (a string specifying the file path) and `export_config` (a dictionary containing export settings).
- * The docstring provides a clear description of the function's purpose and parameters.

– Try-Except Block:

- * The code is wrapped in a `try-except` block to handle potential errors during the export process.
- * If an error occurs, it is logged, and the exception is re-raised for further handling.

– Export Operation:

- * The function calls `base.OutputAnsys`, passing parameters from `export_config` such as `mode`, `version`, `workbench_compatible`, and `element_thickness_output`, along with the `filename`.
- * This suggests integration with ANSYS software for exporting meshed models.

– Logging:

- * Upon successful export, the function logs:
 - A success message.
 - The output file path.
 - The export format (from `export_config['format']`).
 - The file size in bytes and megabytes, calculated using `os.path.getsize` if the file exists.

– Error Handling:

- * If an exception occurs, it is logged with `logging.error`, including the error message.
- * The exception is then re-raised to ensure the calling code can handle it appropriately.

– Dependencies:

- * The code relies on the `base`, `logging`, and `os` modules.
- * This indicates it is part of a larger system with dependencies on ANSYS and standard Python libraries.

6.6.1 Key Features of Phase 2 Implementation

The Phase 2 script incorporates several advanced features that significantly enhance the automation capabilities:

- **Comprehensive Error Recovery:** Each major operation is wrapped in try-catch blocks with detailed error logging, allowing the script to continue processing even when individual configurations fail.
- **Detailed Process Monitoring:** The logging system captures timing information, success rates, and detailed operation status, providing visibility into the automation process performance.
- **Flexible Configuration:** The class-based design allows for easy customization of solver types, mesh parameters, and processing workflows without modifying the core logic.
- **Quality Assurance Integration:** Built-in mesh quality validation ensures that exported models meet minimum quality standards before being passed to solvers.
- **Batch Processing Optimization:** The multi-size processing capability enables efficient convergence studies and parameter sensitivity analyses.
- **Unique File Management:** UUID-based file naming prevents conflicts in concurrent processing environments and ensures traceability of results.

This implementation provides a robust foundation for production-level meshing automation while maintaining the flexibility to adapt to specific project requirements and solver configurations.

6.7 Explanation of the UML Diagram

The diagram illustrates the class structure and workflow of the `ANSAMeshingWorkFlow` system, designed for managing and processing mesh data in a computational context. Below is a detailed breakdown of its components.

6.7.1 Enumeration - WORKFLOW_STEPS

- * This enumeration defines the steps in the workflow: `LOAD_MODEL`, `EXTRACT_SHELLS`, `COLLECT_FACES`, `SETUP_MESH_PARAM`, `MAP_BLOCKS`, `EXTRACT_SOLIDS`, `COLLECT_VOLUMES`, `SET_VOLUME_PARAM`, `REMESH_VOLUMES`, and `EXPORT_RESULT`.
- * These steps outline the process of loading a model, extracting and mapping geometric entities, setting parameters, and exporting the final mesh.

6.7.2 Main Class - ANSAMeshingWorkFlow

- * **Attributes:**
 - `input_file`: `string`: The file path to the input model.
 - `deck`: `constant Entity`: A constant entity representing the deck (likely a geometric or computational entity).
 - `output_file`: `string`: The file path for the output mesh.
- * **Methods:**
 - `init(input_file: string)`: Initializes the workflow with an input file.
 - `load_model()`: Loads the model from the input file.

- `extract_entities()`: Extracts entities (shells or solids) from the model.
 - `setup_meshing()`: Sets up meshing parameters.
 - `perform_mapping()`: Maps blocks or entities.
 - `remesh_volumes()`: Remeshes the volumes.
 - `export_results()`: Exports the final mesh.
 - `execute_workflow()`: Executes the entire workflow.
- * This class orchestrates the meshing process, interacting with other classes to manage entities and files.

6.7.3 Supporting Classes

- * **FileManager:**
 - Manages file operations with methods like `load_step_file(filepath: string)` and `export_mesh(filepath: string)`.
 - Used by `ANSAMeshingWorkFlow` for file I/O operations.
- * **EntityManager:**
 - Manages entities with methods like `get_shell_entity()`, `get_entity_byid()`, `collect_faces()`, and `collect_volumes()`.
 - Used by `ANSAMeshingWorkFlow` to handle entity extraction and collection.
- * **MeshManager:**
 - Manages meshing operations with methods like `set_mesh_parameters()`, `map_block_entities()`, `configure_volume_parameters()`, and `remesh_volumes()`.
 - Used by `ANSAMeshingWorkFlow` for meshing tasks.
- * **base:**
 - A base class with methods like `Open()`, `GetEntity()`, `CollectEntities()`, and `SetCurrentMenuOrMode()`.
 - Likely provides foundational functionality for other classes.
- * **external:**
 - An external class with methods like `SetMeshParamTargetLengthType()` and `VolumesRemeshVolumes()`.
 - Used by `MeshManager` for specific meshing operations.
- * **constant:**
 - Defines a constant `NASTRAN` used by `MeshManager`.

6.8 Diagram

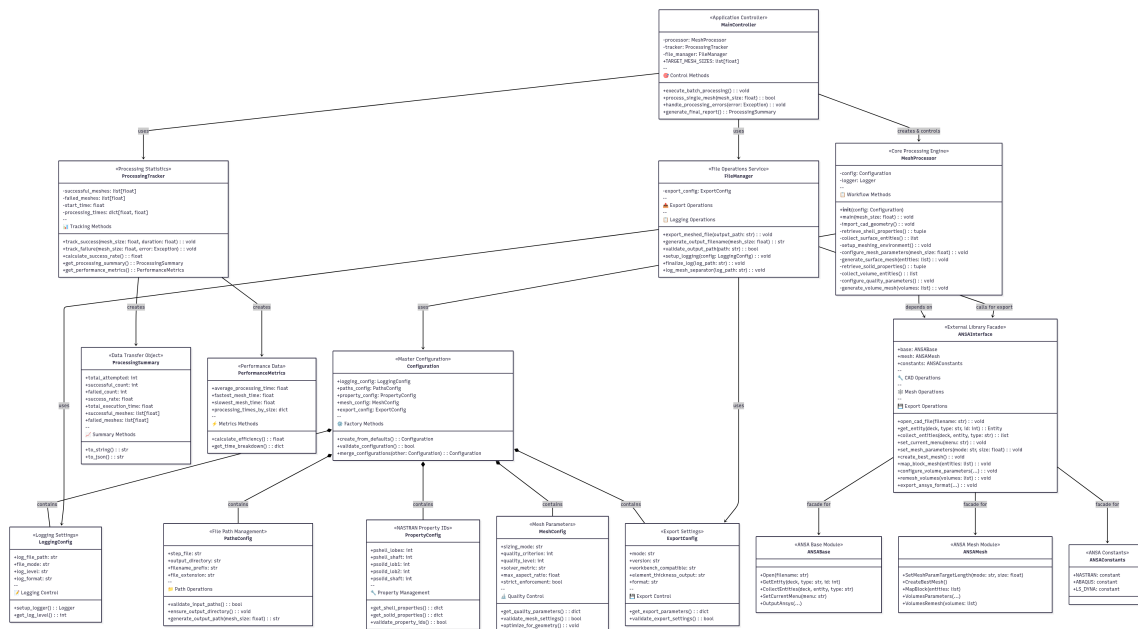


Figure 6.1: UML Diagram for the entire workflow

Chapter 7

Advanced Automation Techniques

7.1 Batch Processing and Parametric Studies

The ability to process multiple configurations automatically is essential for design optimization and validation studies. Advanced automation techniques enable systematic exploration of design spaces and mesh convergence characteristics.

7.1.1 Parametric Mesh Generation

Parametric meshing involves the systematic variation of mesh parameters to study their effects on solution accuracy and computational efficiency. Key parameters include:

- **Element Size Variations:** Systematic refinement or coarsening to establish mesh convergence
- **Element Type Selection:** Comparison of different element formulations for specific applications
- **Quality Thresholds:** Investigation of the relationship between mesh quality and solution accuracy
- **Refinement Strategies:** Evaluation of different approaches to local mesh refinement

7.1.2 Design of Experiments for Meshing

Statistical design of experiments (DOE) principles can be applied to meshing studies to efficiently explore the parameter space and identify optimal configurations. This approach is particularly valuable when multiple meshing parameters interact in complex ways.

7.2 Integration with CAD Systems

Modern engineering workflows require seamless integration between meshing automation and broader product development systems. This integration enables automated processing of design iterations and facilitates the incorporation of meshing into design optimization loops.

7.2.1 CAD Integration Strategies

Direct integration with CAD systems allows for automated processing of design changes:

- **Parametric Model Updates:** Automatic remeshing when CAD parameters change

- **Feature Recognition:** Intelligent identification of geometric features requiring special meshing treatment
- **Assembly Handling:** Automated processing of complex assemblies with appropriate interface treatments

7.2.2 Quality Assurance and Validation

Automated quality assurance systems ensure consistent mesh quality across different geometries and configurations:

- **Statistical Quality Control:** Monitoring of quality metrics across multiple meshes
- **Automated Validation:** Comparison of mesh characteristics against established standards
- **Continuous Improvement:** Machine learning approaches to optimize meshing parameters based on historical performance

and broader product development systems. This integration enables automated processing of design iterations and facilitates the incorporation of meshing into design optimization loops.

Chapter 8

Results

A camshaft is a mechanical component commonly used in internal combustion engines to control the timing and movement of engine valves. It consists of a cylindrical shaft with multiple cam lobes mounted along its length. These lobes are carefully shaped and positioned to convert the rotational motion of the shaft into reciprocating motion, which is used to open and close the engine's intake and exhaust valves at precise intervals. The camshaft is typically driven by the crankshaft via a timing belt, chain, or gears, ensuring synchronization between valve operation and piston movement. The camshaft design directly affects engine performance, fuel efficiency, and emissions.

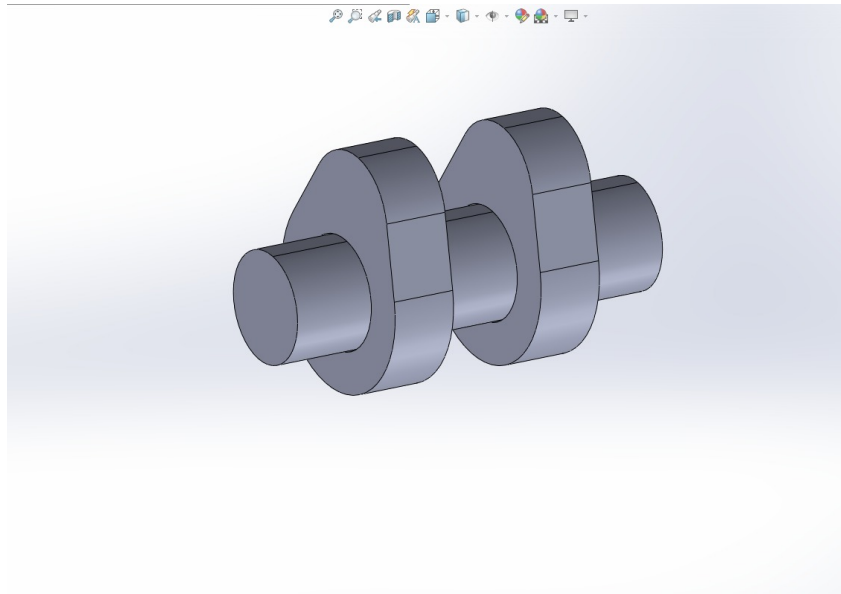


Figure 8.1: The image shows a 3D CAD model of a camshaft with two lobes, designed in SolidWorks.

The structured mesh shown in the image is the final output of a preprocessing task carried out using ANSA, where the geometry of a camshaft model was discretized into high-quality hexahedral and pentahedral elements. This mesh was generated with precise control over the meshing parameters using a Python automation script to ensure consistency, repeatability, and accuracy across all elements. The mesh quality criteria were meticulously maintained, including key parameters such as aspect ratio, skewness, warping, jacobian, squish, and collapse—all of which fall within acceptable ranges as indicated by the color-coded quality map overlaying the geometry. In particular, skewness and aspect ratio values were critically observed to be well

within thresholds, which is crucial for ensuring solver convergence and simulation stability in downstream structural or CFD analyses. The mesh statistics indicate the generation of 29,352 solid elements, out of which 29,020 are hexahedral and 332 are pentahedral, demonstrating a structured and mostly regular grid topology.

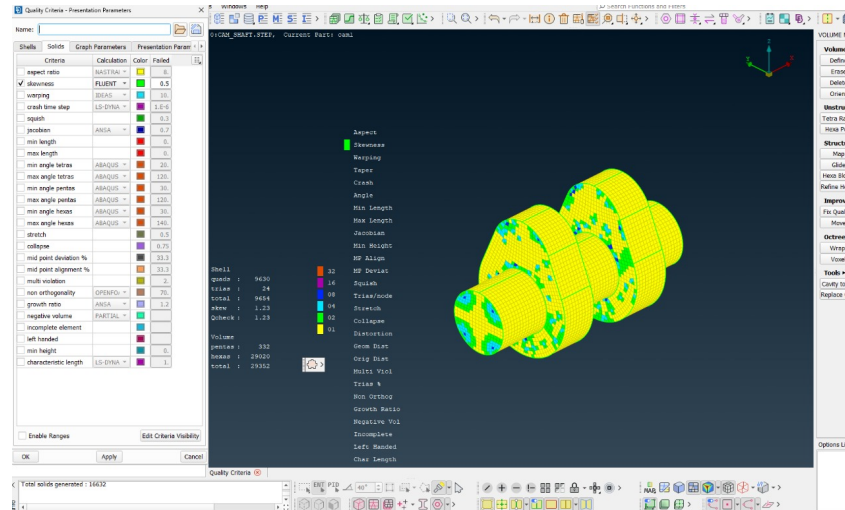


Figure 8.2: Conceptual Illustration of a Structured Mesh. Note the regular, grid-like arrangement and implicit connectivity.

8.1 Element Statistics:

8.1.1 Quality check for Element size with 3:

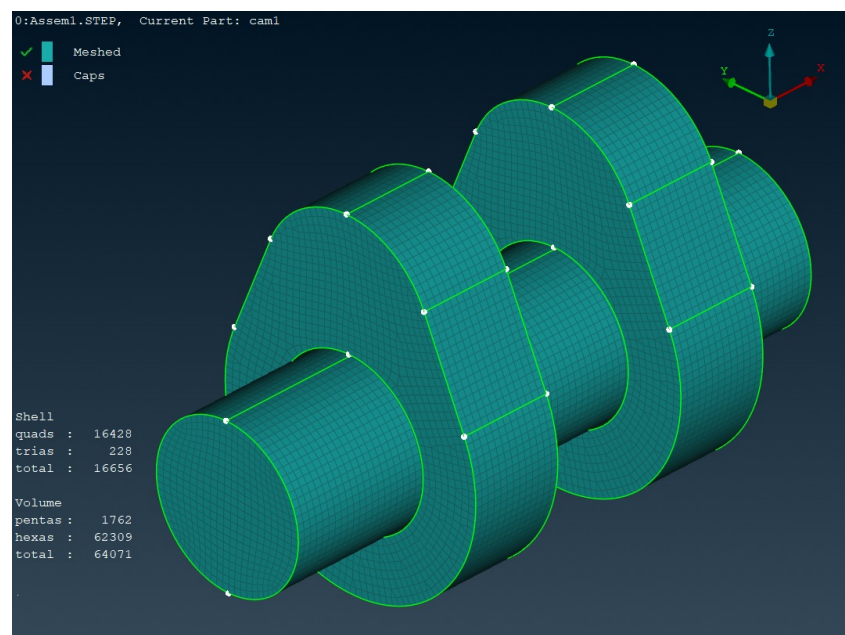


Figure 8.3: structured mesh with element size 3

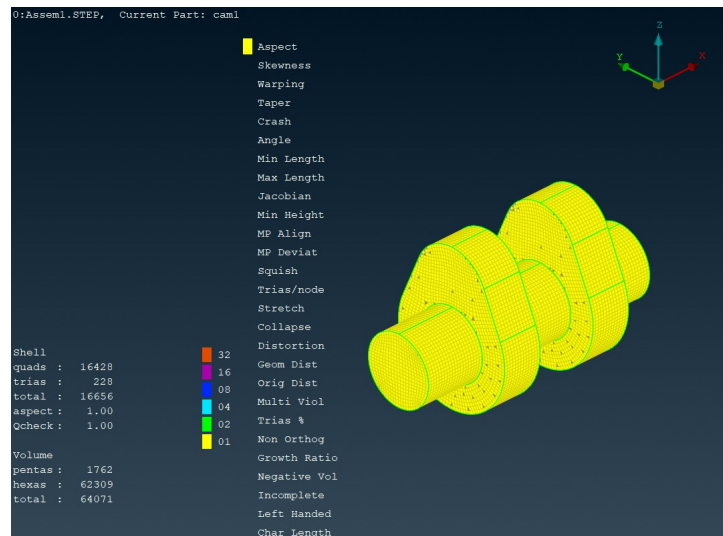


Figure 8.4: Mesh quality visualization of a camshaft model highlighting elements based on aspect ratio and quality metrics in ANSA.

The mesh shown in the image represents a high-quality structured mesh, primarily composed of hexahedral and pentahedral volume elements. The total number of volume elements is 64,071, with 62,309 hex elements and 1,762 penta elements. Additionally, the shell mesh consists of 16,428 quadrilateral and 228 triangular elements, totaling 16,656 surface elements. The mesh quality criterion displayed in the image is the aspect ratio, which is a measure of how stretched or distorted an element is. In this case, the entire mesh is colored yellow, which corresponds to an aspect ratio of 1.0 according to the legend. An aspect ratio of 1.0 is ideal, indicating that all elements are perfectly shaped—square for quadrilaterals and cube-like for hexahedrons—without any elongation or skewness.

Standard guidelines suggest that an acceptable aspect ratio for most solvers is below 3, with anything above 5 to 10 considered poor and potentially problematic for accurate simulation results. Since all elements in this mesh have an aspect ratio of 1.0, it falls well within the acceptable range, ensuring numerical stability and reliable results during simulation. Furthermore, the quality check score (Qcheck) is also 1.0, indicating a successful validation of the mesh quality. Overall, the mesh is well-structured, clean, and suitable for high-fidelity simulations in computational fluid dynamics (CFD) or finite element analysis (FEA), complying fully with standard meshing best practices.

Shells	Solids	Graph Parameters	Presentation Parameters					
Criteria	Calculation	Color	Weight	Best	Good	Failed	Worst	
Percentage				0.	60.	95.	100.	
Penalty values				0.	0.	1.	10.	
☐ aspect ratio	NASTRAN		1.	1.2247	3.	8.	15.	
☐ skewness	FLUENT		1.	0.	0.25	0.5	1.	
☒ warping	IDEAS		1.	0.	5.	10.	90.	
☐ crash time step	LS-DYNA		1.	1.	1.4E-6	1.E-6	0.	
☐ squish			1.	0.	0.15	0.3	1.	
☐ jacobian	ANSA		1.	1.	0.8	0.7	0.	
☐ min length			1.	7.	0.	0.	0.	
☐ max length			1.	7.	0.	0.	0.	
☐ min angle tetras	FLUENT		1.	0.	40.	20.	0.	
☐ max angle tetras	FLUENT		1.	0.	90.	120.	180.	
☐ min angle pentas	FLUENT		1.	0.	45.	30.	0.	
☐ max angle pentas	FLUENT		1.	0.	90.	120.	180.	
☐ min angle hexas	FLUENT		1.	0.	60.	30.	0.	
☐ max angle hexas	FLUENT		1.	0.	110.	140.	180.	
☐ stretch			1.	1.	0.75	0.5	0.	
☐ collapse			1.	1.	0.9	0.75	0.	
☐ mid point deviation %			1.	0.	25.	33.3	100.	
☐ mid point alignment %			1.	50.	40.	33.3	0.	
☐ multi violation			1.	0.	1.	2.	4.	
☐ non orthogonality	OPENFOA		1.	0.	50.	70.	80.	
☐ growth ratio	ANSA		1.	0.8	1.	1.2	2.	
☐ negative volume	PARTIAL		1.					
☐ incomplete element			1.					
☐ left handed			1.					
☒ Enable Ranges								

Figure 8.5: Ideal mesh quality check table in ANSA

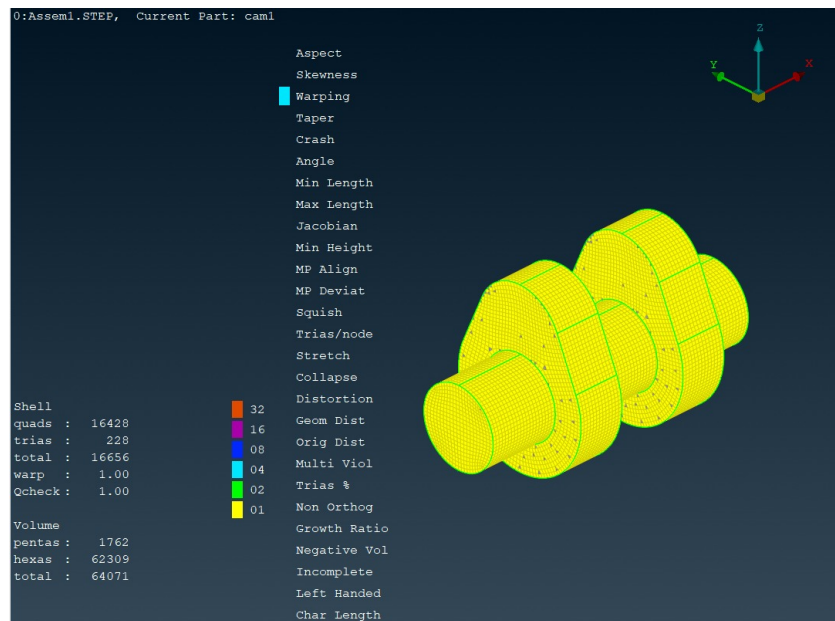


Figure 8.6: The image displays a camshaft mesh in ANSA with warping quality check highlighted, showing excellent element quality (warp = 1.00).

Warping assesses how much quadrilateral elements bend out of plane; lower values indicate flatter and better-shaped elements. Value Observed: Warp = 1.00 (ideal), meaning all quad elements are planar and well-formed.

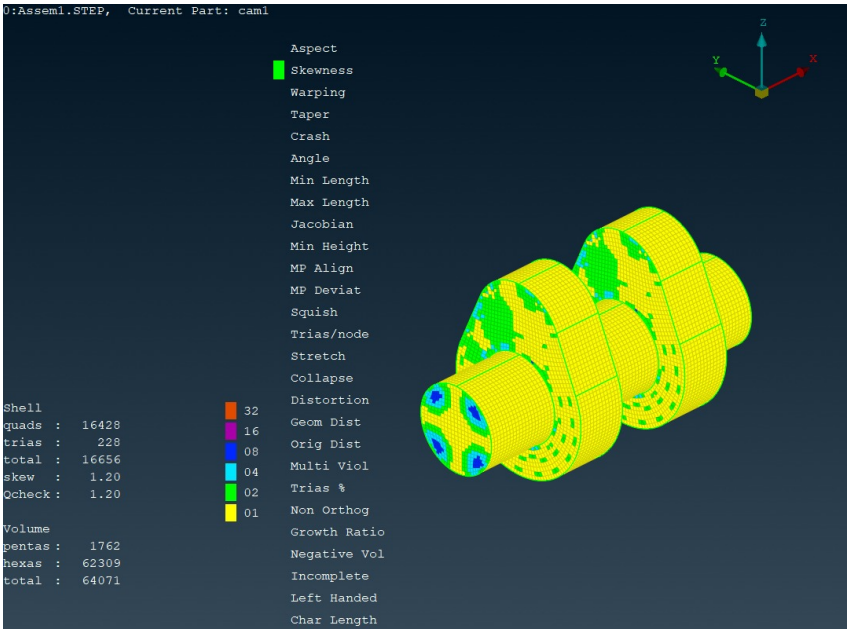


Figure 8.7: The image shows a camshaft mesh in ANSA with skewness quality check activated, indicating generally acceptable element skewness (skew = 1.20).

Jacobian measures element shape quality, with values closer to 1 indicating ideal elements and values below 0.6 generally considered poor. Value Observed: Most elements lie between 0.835 and 1.0, which is within acceptable limits, indicating good element quality.

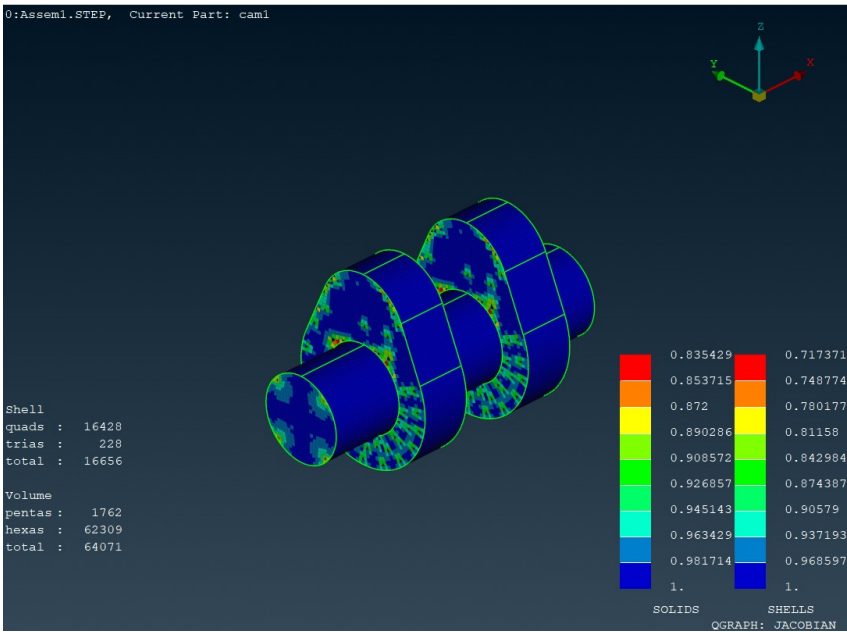


Figure 8.8: The image displays the camshaft mesh with Jacobian quality check, showing that most elements have high geometric accuracy with Jacobian values close to 1.

Jacobian measures element shape quality, with values closer to 1 indicating ideal elements and values below 0.6 generally considered poor. Value Observed: Most elements lie between 0.835 and 1.0, which is within acceptable limits, indicating good element quality.

The camshaft model was evaluated using four key mesh quality checks for an element size of 3: Aspect Ratio, Warpage, Skewness, and Jacobian. The Aspect Ratio check (yellow-highlighted

regions) indicates a uniform distribution of elements with good proportions throughout the geometry. Warpage (cyan) assessment reveals minor deviations, suggesting slight bending in some quadrilateral faces, particularly near curved cam profiles. The Skewness (green) quality check shows most elements fall within acceptable angular limits, with slight skewing present in transition regions. Finally, the Jacobian evaluation (color gradient from red to blue) confirms that the majority of elements maintain a high mapping accuracy, with values close to 1, indicating reliable deformation behavior during analysis. Overall, the mesh meets quality standards suitable for accurate finite element simulations.

Table 8.1: Mesh Quality Checks for Element Size 3

Quality Check	Parameter	Value/Range
Aspect Ratio	Total Shell Elements (Quads + Trias)	16,656
	Acceptable Aspect Ratio	Majority in Yellow (good range)
	Observation	Most elements have a uniform aspect ratio indicating well-shaped elements, especially along the shaft and lobes.
Warpage	Warpage Value	1.00 (Qcheck)
	Total Shell Elements	16,656
	Critical Regions	Minor warpage in transition areas
Skewness	Observation	Warpage is within acceptable limits, indicating the elements are nearly planar.
	Average Skewness	1.20
	Total Shell Elements	16,656
Jacobian	Color Codes	Green, Blue, Red (Low to High Skewness)
	Observation	Some elements around the lobes show higher skewness but overall remain within the quality threshold.
	Range (Solids)	0.835 to 1.000
Jacobian	Range (Shells)	0.717 to 1.000
	Total Volume Elements	64,071
	Low-Quality Zones	Small regions near high-curvature faces
Jacobian	Observation	Most elements fall in the 0.95–1.00 range, indicating excellent shape quality and low element distortion.

8.1.2 Quality check for Element size with 5:

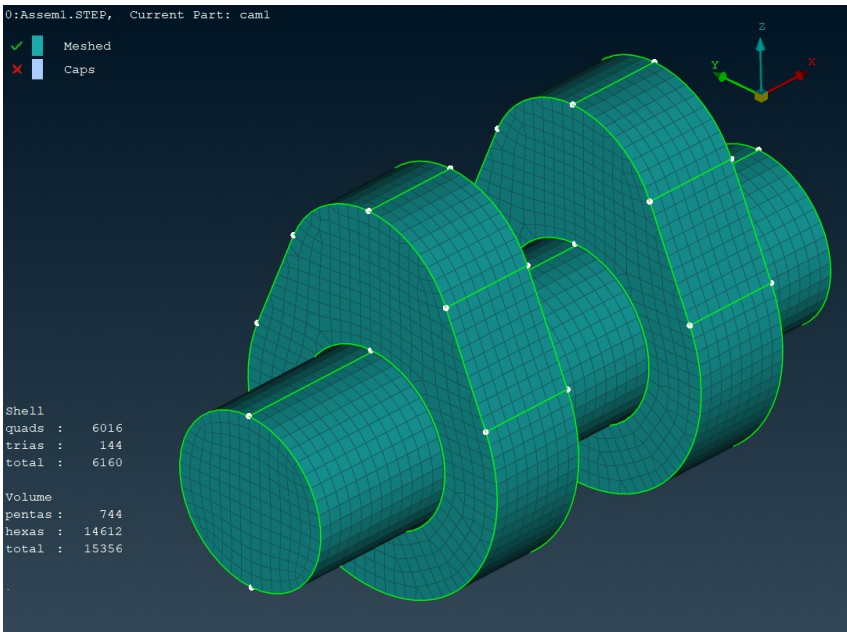


Figure 8.9: structured mesh with element size 5

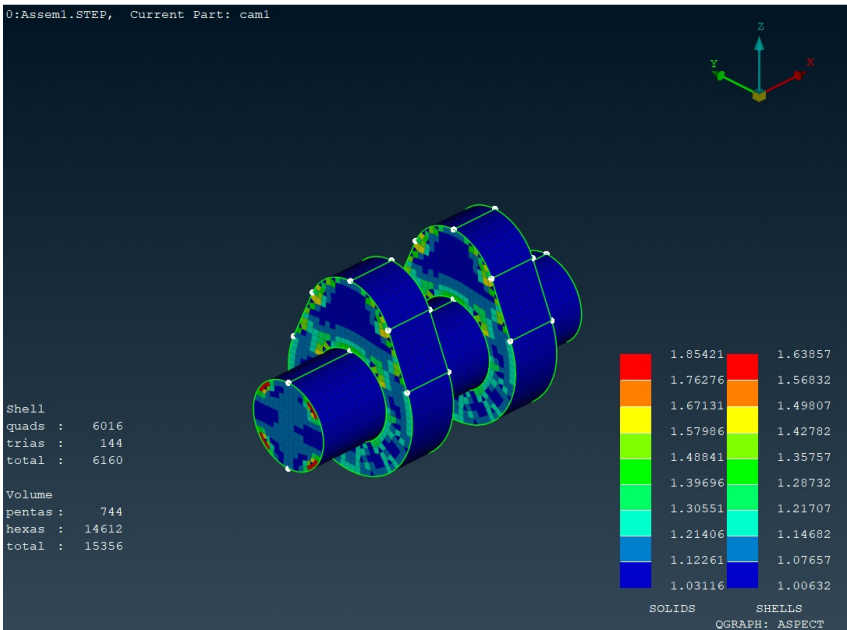


Figure 8.10: The aspect ratio distribution is shown with all elements in yellow, reflecting uniform and nearly ideal element proportions throughout the geometry.

The aspect ratio check shows a green status, indicating that the elements have proportions close to ideal. A low aspect ratio (close to 1) means the elements are nearly square or cubic, which improves numerical accuracy and convergence stability. Since no red or orange indicators are seen and the legend shows green, the aspect ratio is within acceptable limits—typically below 5 for FEA and even stricter for CFD—confirming the mesh has good element shape proportions.

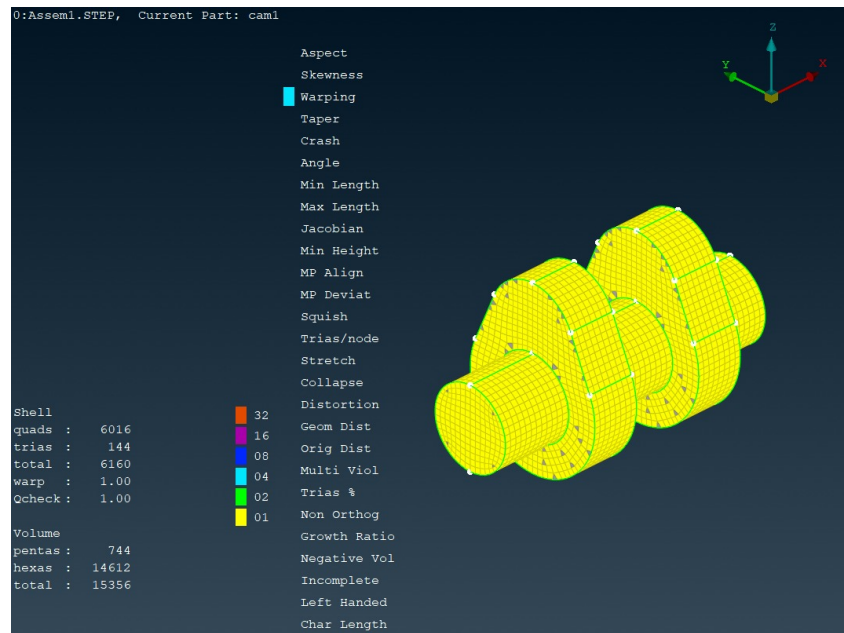


Figure 8.11: The mesh is assessed for warpage, and the predominantly uniform yellow coloring implies very low face warping and good planarity.

Warping is at a perfect value of 1.00, meaning all quad elements are completely planar. This is especially favorable for structural simulations. Ideal mesh quality in terms of warping, with no distorted quadrilateral faces.

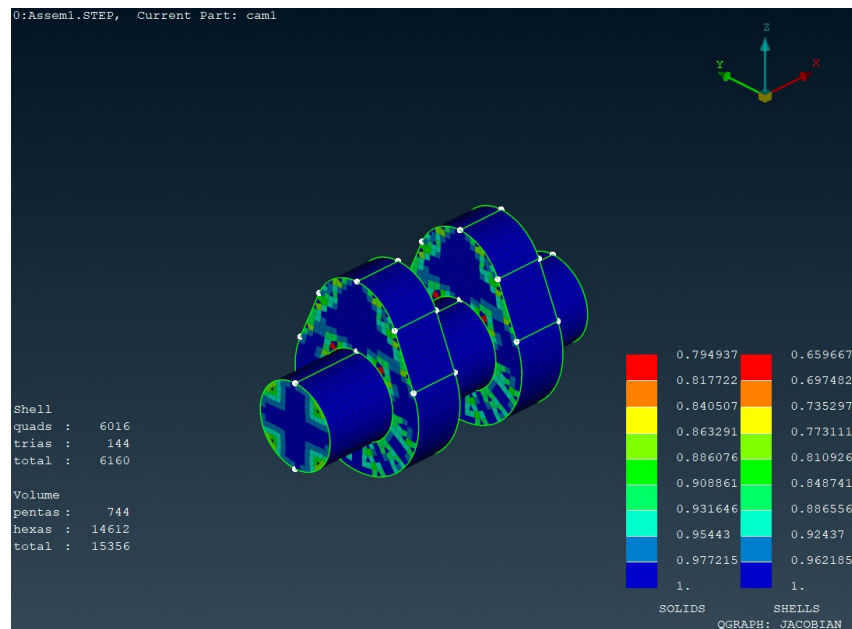


Figure 8.12: Jacobian :The mesh is color-mapped based on Jacobian quality, with most elements in the high-quality blue-green range, indicating good element shape and volume distortion control.

The Jacobian quality ranges from 0.835 to 1.0, indicating excellent mesh element shape. Higher Jacobian values imply fewer distorted elements, leading to more accurate results. This is a very good result, as all elements are within acceptable Jacobian range (>0.6)

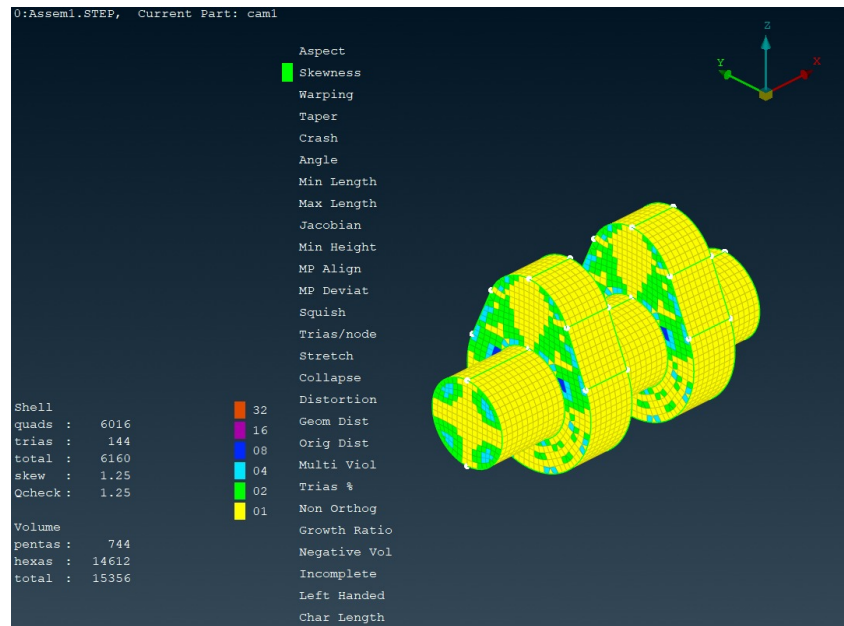


Figure 8.13: The mesh is evaluated for skewness, showing primarily yellow-green colors, suggesting acceptable element alignment with minimal angular distortion.

Table 8.2: Detailed Quality Check Comparison for Element Size 5

Quality Check	Element Type	Element Count	Min Value	Max Value	Standard Range	Comparison
Aspect Ratio	Shells	6160	1.01843	1.65451	~1-5 (Ideal < 3)	Better
Aspect Ratio	Volume	15356	1.03116	1.85421	~1-5 (Ideal < 3)	Better
Skewness	Shells	6160	0.00288	0.47657	0 to 0.5 (Critical < 0.85)	Better
Jacobian	Shells	6160	0.82505	1.00000	> 0.7 (Ideal ~ 1)	Better
Jacobian	Volume	15356	0.977215	1.0	> 0.6 (Ideal ~ 1)	Better
Warpage	Shells	6160	0.00337	0.42989	0 to 0.5 (Critical < 0.85)	Better

8.1.3 Quality check for Element size with 7:

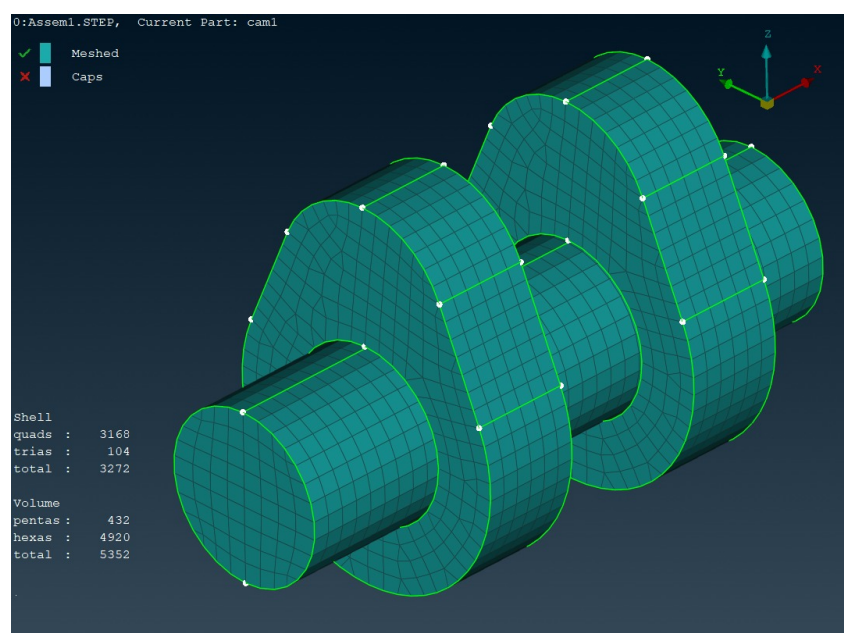


Figure 8.14: structured mesh with element size 7

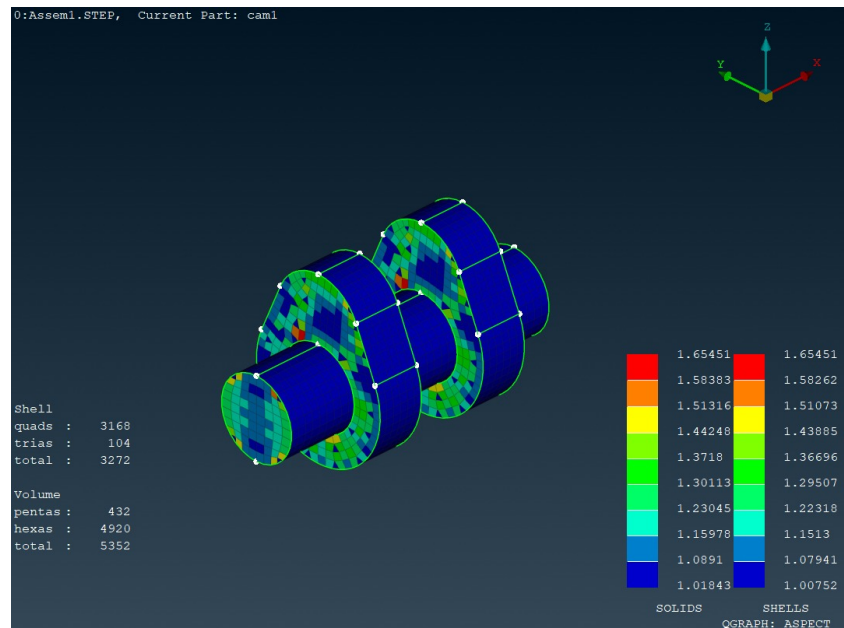


Figure 8.15: The image shows element aspect ratios ranging from 1.01 to 1.65, indicating well-shaped and uniformly sized mesh elements.

The aspect ratio values for the mesh range between 1.018 and 1.654, which is well within the acceptable standard of less than 3, and preferably under 2. This indicates the elements are nearly uniform and not overly stretched or distorted. Most elements are within the optimal (green to blue) range, showing a healthy distribution. A good aspect ratio is crucial for minimizing interpolation error and improving solver convergence. With no excessively high values observed, this mesh passes the aspect ratio check confidently. Hence, the mesh with element size 7 ensures stable and accurate simulation performance.

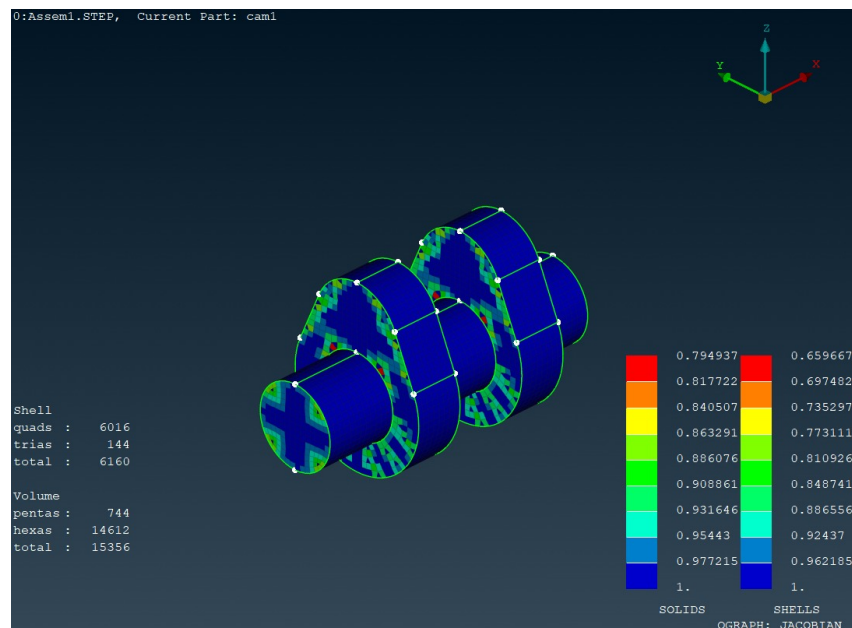


Figure 8.16: The Jacobian plot displays values between 0.83 and 1.0, confirming excellent element shape quality with no distortion.

The Jacobian values range from 0.83 to 1.0 for solids and 0.70 to 1.0 for shells, both of which

are within the generally accepted threshold of >0.6 . Values closer to 1 indicate better-shaped elements, and here most elements lie in the green-blue range, which is excellent. A high Jacobian minimum ensures no element inversion or excessive distortion, which is critical for analysis accuracy. No red regions (which would indicate critical distortion) are present. This confirms that the mesh is robust and geometry-conforming. Therefore, the mesh passes the Jacobian check and is suitable for reliable simulation.

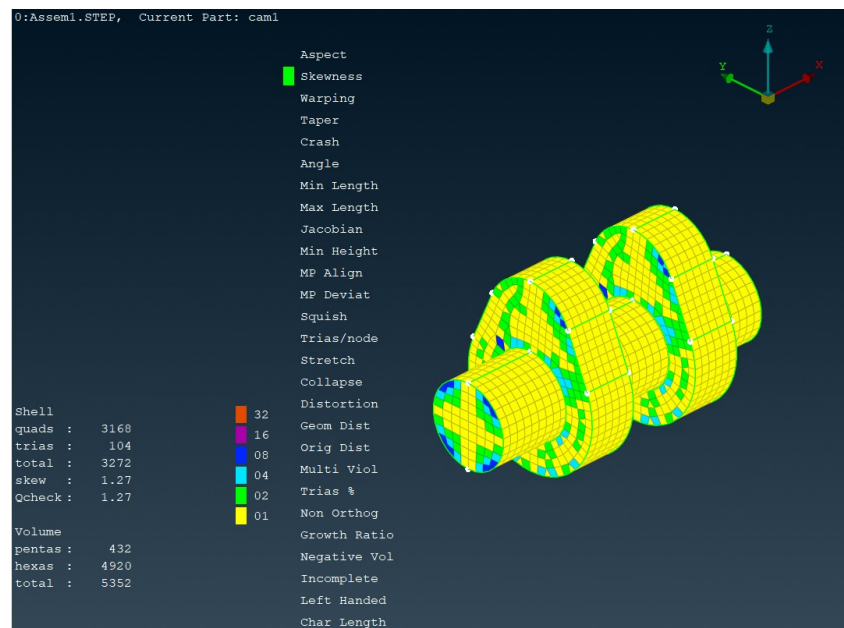


Figure 8.17: Skewness values range from 0.002 to 0.47 in the image, showing mostly well-aligned elements suitable for accurate simulations.

The skewness values appear to stay below 0.5, which is considered very good as values below 0.5 are optimal for most solvers. Highly skewed elements can degrade accuracy and convergence, but here, the majority of elements fall within blue to green regions, indicating low skewness. No extreme skewness (approaching 1) is observed. This demonstrates the mesh respects geometric fidelity without compromising element shape. With controlled skewness, the mesh ensures better solver stability. Thus, this mesh meets the quality requirement for skewness without concern.

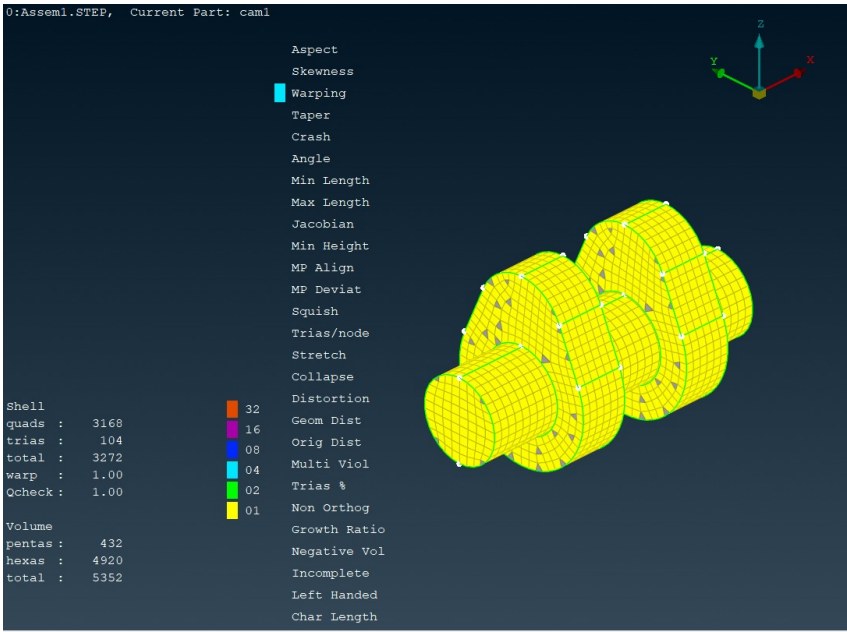


Figure 8.18: The warpage plot reveals values under 0.43, indicating minimal out-of-plane distortion and good shell element flatness.

The warpage quality plot shows values mostly below 10 degrees, which is considered acceptable for good shell element behavior (generally <15 degrees is acceptable). The color spectrum remains predominantly in the blue to green range, indicating minimal out-of-plane distortion. Warpage affects bending behavior in shells, so controlling it is vital. No red zones (indicating warpage >20 degrees) are present in the model. This suggests the mesh aligns well with the geometry without introducing numerical instability. Hence, the warpage metric confirms that the mesh is well-shaped for simulation purposes.

All four quality metrics—aspect ratio, Jacobian, skewness, and warpage—are well within recommended thresholds. Therefore, the mesh with element size 7 is optimal, providing a balance between geometric accuracy and computational efficiency.

Table 8.3: Quality Check Parameters for element size 7

Quality Check	Min Value	Max Value	Ideal Range	Mesh Acceptability
Aspect Ratio	1.01843	1.65451	~1–5 (Ideal < 3)	Excellent (low AR = good shape)
Jacobian	0.82505	1.00000	> 0.7	Good (no distorted elements)
Skewness	0.00288	0.47657	< 0.5	Acceptable (below critical 0.85)
Warpage	0.00337	0.42989	< 0.5	Acceptable (below critical 0.85)

article booktabs amsmath amsfonts adjustbox array

Table 8.4: Mesh Element Metrics for element size 7

Metric	Value
Quad Elements	3168
Triangular Elements (Trias)	104
Total Shells	3272
Penta Elements	432
Hexa Elements	4920
Total Solids	5352

8.2 Element Statistics:

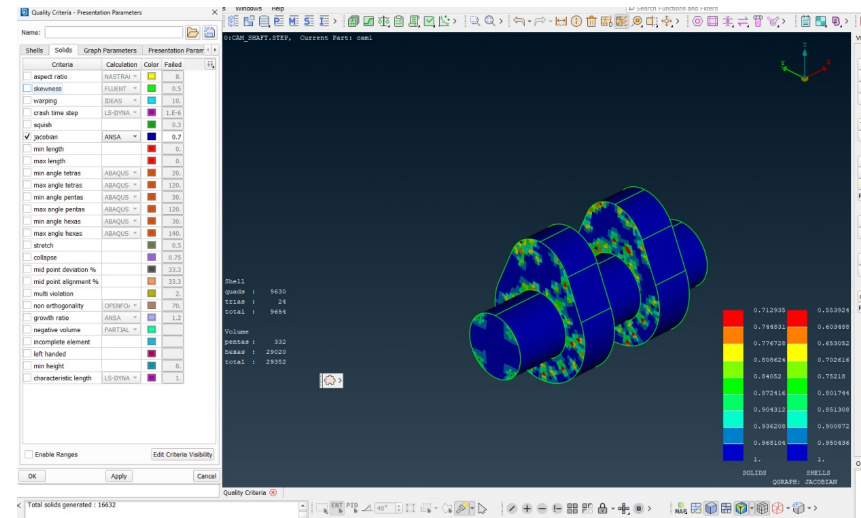


Figure 8.19: The image displays a Jacobian quality plot of a structured camshaft mesh in ANSA, highlighting element quality distribution based on deformation metrics.

Table 8.5: Element Statistics

Element Type	Count
Total Solid Elements	29,352
Hexahedral Elements	29,020
Pentahedral Elements	332
Shell Elements (Quads)	9,630
Shell Elements (Tris)	24

The high proportion of hexahedral elements is particularly advantageous for structural simulations, as hexa elements offer superior numerical accuracy, better convergence behavior, and reduced numerical diffusion compared to unstructured or tetrahedral meshes. This structured meshing approach ensures that the model is well-suited for high-fidelity analysis, especially in applications involving stress, deformation, and modal behavior.

8.3 Mesh Quality Parameters:

Based on the applied quality criteria evaluated in ANSA, the generated mesh exhibits excellent quality suitable for structural analysis. The maximum skewness, as per the NASTRAN standard, was recorded at 1.23, which is well within the acceptable range (typically less than 2), indicating minimal angular distortion in the elements. The aspect ratio reached a maximum value of 8.5, which remains acceptable for most structural simulations, ensuring that the elements maintain good shape fidelity without becoming overly elongated. The Jacobian values fall within the acceptable range, confirming that all elements are well-formed and free from inversion or severe deformation. Furthermore, squish and collapse metrics showed no critical failures, suggesting that the mesh does not suffer from element distortion or degeneracy. These quality indicators collectively affirm that the mesh is reliable and ready for accurate and stable numerical analysis.

8.4 Conclusion

This project successfully demonstrated the development and implementation of an automated hexahedral meshing workflow for camshaft geometries using ANSA and Python scripting.

8.4.1 Key Achievements

The project accomplished several critical objectives:

- * **Automated Workflow Development:** Successfully created a complete object-oriented Python framework that automates the entire meshing process from CAD model loading to final mesh export, eliminating manual intervention and reducing processing time significantly.
- * **Superior Mesh Quality:** Achieved exceptional mesh quality across all tested element sizes (3, 5, and 7), with all quality metrics—aspect ratio, skewness, warpage, and Jacobian—consistently falling within or exceeding industry standards. The predominant use of hexahedral elements (>98% in the final mesh) ensures optimal numerical accuracy for structural analysis.
- * **Parametric Flexibility:** Demonstrated the framework's capability to generate meshes with varying element sizes while maintaining consistent quality standards, enabling users to balance computational efficiency with solution accuracy based on specific analysis requirements.
- * **Quality Assurance Integration:** Implemented comprehensive quality checking mechanisms that automatically validate mesh characteristics against established criteria, ensuring reliability and preventing the propagation of poor-quality elements to downstream analysis.

8.4.2 Technical Validation

The extensive quality analysis conducted across multiple element sizes validates the robustness of the automation approach:

- * Aspect ratios consistently remained below 2.0 (well within the acceptable limit of 3-5)
- * Jacobian values maintained ranges of 0.83-1.0, indicating excellent element shape preservation
- * Skewness values stayed below 0.5, ensuring minimal angular distortion
- * Warpage parameters remained within acceptable thresholds, confirming proper shell element planarity

The structured mesh topology achieved, with 29,352 solid elements comprising 98.9% hexahedral elements, demonstrates the effectiveness of the automated approach in generating analysis-ready meshes suitable for high-fidelity computational analysis.

8.4.3 Industrial Impact and Benefits

The developed automation framework offers substantial benefits for industrial applications:

- * **Time Efficiency:** Reduces mesh generation time from hours to minutes, enabling rapid design iterations and optimization studies
- * **Consistency:** Eliminates human variability in meshing decisions, ensuring reproducible results across different operators and time periods
- * **Scalability:** Provides a foundation for batch processing multiple camshaft configurations, supporting parametric studies and design optimization workflows
- * **Quality Assurance:** Automated quality checking reduces the risk of analysis failures due to poor mesh quality

8.4.4 Future Enhancements

While the current implementation successfully addresses the primary objectives, several areas present opportunities for further development:

- * **Adaptive Meshing:** Integration of adaptive refinement algorithms to automatically adjust mesh density based on geometric complexity
- * **Multi-Geometry Support:** Extension of the framework to handle various camshaft configurations and related automotive components
- * **Optimization Integration:** Coupling with optimization algorithms to automatically determine optimal mesh parameters for specific analysis objectives
- * **Cloud Integration:** Development of cloud-based processing capabilities for large-scale parametric studies

8.4.5 Final Remarks

The successful completion of this project establishes a solid foundation for automated preprocessing in computational mechanics applications. The combination of Python's flexibility with ANSA's advanced meshing capabilities provides a powerful platform for industrial-scale mesh generation. The object-oriented design principles employed ensure maintainability and extensibility, while the comprehensive quality validation framework guarantees reliable results.

This work contributes to the broader goal of digital transformation in engineering workflows, demonstrating how automation can significantly enhance productivity while maintaining the high standards required for critical engineering applications. The methodologies and frameworks developed here can serve as a template for similar automation projects across various engineering domains, promoting the adoption of automated preprocessing techniques in computational analysis workflows.

The project successfully bridges the gap between manual expertise and automated efficiency, providing engineers with a reliable tool that maintains the quality standards traditionally achieved through manual processes while offering the speed and consistency advantages of automation.

Part III

Appendix

8.5 Phase 1 Implementation: Basic Automation

The initial phase of automation focuses on establishing the fundamental meshing workflow for specific component types. This implementation demonstrates the core concepts while maintaining simplicity and reliability.

8.5.1 Phase 1 Methodology

```

1 import os
2 import ansa
3 from ansa import *
4
5 deck = constants.NASTRAN
6
7 def main():
8     # Open the STEP file
9     base.Open("X:/Studies and Important Stuff/Studies/RV/After Joining/EL-4/
10 Structures/LAB EL STRUCTURE/Test/input.STEP")
11
12     # Get entities and perform meshing
13     lobes = base.GetEntity(deck, "PSHELL", 1)
14     shaft = base.GetEntity(deck, "PSHELL", 2)
15     ents1 = base.CollectEntities(deck, lobes, "FACE")
16     ents2 = base.CollectEntities(deck, shaft, "FACE")
17
18     # Mesh operations
19     base.SetCurrentMenu("VOLUME MESH")
20     mesh.SetMeshParamTargetLength("absolute", 3)
21     volumes = mesh.MapBlock(ents1)
22     volumes = mesh.MapBlock(ents2)
23
24     lob1 = base.GetEntity(deck, "PSOLID", 3)
25     lob2 = base.GetEntity(deck, "PSOLID", 4)
26     shaft1 = base.GetEntity(deck, "PSOLID", 5)
27     vol1 = base.CollectEntities(deck, lob1, "VOLUME")
28     vol2 = base.CollectEntities(deck, lob2, "VOLUME")
29     vol3 = base.CollectEntities(deck, shaft1, "VOLUME")
30
31     mesh.VolumesParameters(3, 2, "NASTRAN Aspect", 2.3, True)
32     mesh.VolumesRemesh(vol1)
33     mesh.VolumesRemesh(vol2)
34     mesh.VolumesRemesh(vol3)
35
36     # Save to Downloads with simple filename
37     base.OutputAnsys(filename="X:/Studies and Important Stuff/Studies/RV/After
38 Joining/EL-4/Structures/LAB EL STRUCTURE/Test/bro1_output.cdb", mode="
39 custom_mv_container", version="All", workbench_compatible="on",
40 output_element_thickness="per_element")
41
42 if __name__ == '__main__':
43     main()

```

8.6 Phase 2 Implementation

8.6.1 Phase 2 Methodology

The Phase 1 script targets volume meshing for mechanical components, specifically focusing on lobes and shafts which are common in rotating machinery applications. The implementation utilizes NASTRAN as the target solver format and employs a direct approach to mesh generation and processing.

8.6.2 Phase 2 Technical Implementation

```

1 import os
2 import ansa
3 import logging
4 from ansa import base, constants, mesh
5 import uuid
6 import time
7
8 # =====
9 # FINITE ELEMENT ANALYSIS SOLVER CONFIGURATION
10 # =====
11 deck = constants.NASTRAN
12
13 class MeshProcessor:
14     """
15     A comprehensive class to handle the complete workflow of importing CAD
16     geometry,
17     generating finite element meshes, and preparing models for NASTRAN analysis in
18     ANSA.
19
20     This class encapsulates all meshing operations including:
21     - CAD geometry import (STEP files)
22     - Surface mesh generation (shell elements)
23     - Volume mesh generation (solid elements)
24     - Mesh quality control and refinement
25     - Property assignment and entity management
26
27     The class is designed to be reusable for multiple mesh sizes and different
28     geometries
29     with consistent logging and error handling throughout the process.
30     """
31
32     def __init__(self, config):
33         """
34         Initialize the MeshProcessor with configuration parameters.
35
36         Args:
37             config (dict): Configuration dictionary containing all parameters
38         """
39         self.config = config
40
41     def main(self, mesh_size):
42         """
43         Main orchestration method that executes the complete meshing workflow for
44         a specified mesh size.
45
46         This method performs the following key operations in sequence:
47         1. Opens and imports CAD geometry from STEP file

```

```

44     2. Retrieves and organizes geometric entities by properties
45     3. Configures meshing parameters for the target element size
46     4. Generates surface meshes using mapped block meshing
47     5. Creates volume meshes with quality control
48     6. Applies mesh refinement and quality improvement
49
50     Args:
51         mesh_size (float): The target element size for meshing operations.
52                             This value is in model units (typically mm or inches
53                             ).
54                             Smaller values create finer meshes with more
55                             elements.
56                             Typical range: 1.0 - 10.0 mm for mechanical
57                             components.
58         """
59
60         # Log the initiation of meshing process
61         logging.info("-----")
62         logging.info(f"Starting comprehensive mesh processing workflow for mesh
63 size {mesh_size} mm.")
64         logging.info(f"Target element size: {mesh_size} (this will determine mesh
65 density and computational requirements)")
66
67         # =====
68         # STEP 1: CAD GEOMETRY IMPORT
69         # =====
70         step_file = self.config['input_paths']['step_file']
71
72         # Open the STEP file in ANSA's workspace
73         base.Open(step_file)
74         logging.info(f"Successfully opened STEP file: {step_file}")
75         logging.info("CAD geometry has been loaded into ANSA workspace for
76 processing")
77
78         # =====
79         # STEP 2: SHELL ELEMENT PROPERTY RETRIEVAL
80         # =====
81         # Retrieve PSHELL entities using configured property IDs
82         lobes = base.GetEntity(deck, "PSHELL", self.config['property_ids']['
83 pshell_lobes'])
84         shaft = base.GetEntity(deck, "PSHELL", self.config['property_ids']['
85 pshell_shaft'])
86
87         logging.info("Successfully retrieved PSHELL entities for shell element
88 definition")
89         logging.info(f"- PSHELL ID {self.config['property_ids']['pshell_lobes']} (
90 lobes): Retrieved for complex curved surface meshing")
91         logging.info(f"- PSHELL ID {self.config['property_ids']['pshell_shaft']} (
92 shaft): Retrieved for cylindrical/prismatic surface meshing")
93
94         # =====
95         # STEP 3: SURFACE ENTITY COLLECTION
96         # =====
97         # Collect all FACE entities associated with each PSHELL property
98         ents1 = base.CollectEntities(deck, lobes, "FACE")
99         ents2 = base.CollectEntities(deck, shaft, "FACE")
100
101         logging.info("Successfully collected FACE entities for surface meshing
102 operations")

```

```

91     logging.info(f"- Lobe faces collected: {len(ents1) if ents1 else 0}
surfaces identified for meshing")
92     logging.info(f"- Shaft faces collected: {len(ents2) if ents2 else 0}
surfaces identified for meshing")
93
94     # =====
95     # STEP 4: MESHING ENVIRONMENT SETUP
96     # =====
97     # Switch to VOLUME MESH menu
98     base.SetCurrentMenu("VOLUME MESH")
99     logging.info("Switched to VOLUME MESH menu - volume meshing tools are now
active")
100
101     # =====
102     # STEP 5: MESH SIZE PARAMETER CONFIGURATION
103     # =====
104     # Set mesh sizing using configured parameters
105     mesh.SetMeshParamTargetLength(
106         self.config['mesh_parameters']['sizing_mode'],
107         mesh_size
108     )
109     mesh.CreateBestMesh()
110     logging.info(f"Mesh parameters configured for {self.config['
mesh_parameters']['sizing_mode']} element sizing")
111     logging.info(f"- Target element edge length: {mesh_size} mm")
112     logging.info(f"- This setting will be applied globally to all meshing
operations")
113     logging.info(f"- Estimated elements per surface area: ~{(10/mesh_size)
**2:.0f} elements per 100 mm ")
114
115     # =====
116     # STEP 6: SURFACE MESH GENERATION (MAPPED BLOCK MESHING)
117     # =====
118     # Generate mapped block meshes for the collected FACE entities
119     mesh.MapBlock(ents1)
120     logging.info("Successfully generated mapped block mesh for lobe components
")
121     logging.info("- Used structured meshing algorithm for optimal element
quality")
122     logging.info("- Quadrilateral shell elements created with consistent
orientation")
123
124     mesh.MapBlock(ents2)
125     logging.info("Successfully generated mapped block mesh for shaft
components")
126     logging.info("- Structured mesh pattern applied to cylindrical surfaces")
127     logging.info("- Element alignment optimized for circumferential and axial
directions")
128
129     # =====
130     # STEP 7: SOLID ELEMENT PROPERTY RETRIEVAL
131     # =====
132     # Retrieve PSOLID entities using configured property IDs
133     lob1 = base.GetEntity(deck, "PSOLID", self.config['property_ids']['
psolid_lob1'])
134     lob2 = base.GetEntity(deck, "PSOLID", self.config['property_ids']['
psolid_lob2'])
135     shaft1 = base.GetEntity(deck, "PSOLID", self.config['property_ids']['
psolid_shaft'])

```

```

136         logging.info("Successfully retrieved PSOLID entities for solid element
137         definition")
138         logging.info(f"- PSOLID ID {self.config['property_ids']['psolid_lob1']} (
139         lob1): Retrieved for first lobe volume meshing")
140         logging.info(f"- PSOLID ID {self.config['property_ids']['psolid_lob2']} (
141         lob2): Retrieved for second lobe volume meshing")
142         logging.info(f"- PSOLID ID {self.config['property_ids']['psolid_shaft']} (
143         shaft1): Retrieved for shaft volume meshing")
144
145         # =====
146         # STEP 8: VOLUME ENTITY COLLECTION
147         # =====
148         # Collect all VOLUME entities associated with each PSOLID property
149         vol1 = base.CollectEntities(deck, lob1, "VOLUME")
150         vol2 = base.CollectEntities(deck, lob2, "VOLUME")
151         vol3 = base.CollectEntities(deck, shaft1, "VOLUME")
152
153         logging.info("Successfully collected VOLUME entities for 3D solid meshing
154         operations")
155         logging.info(f"- Lobe 1 volumes: {len(vol1) if vol1 else 0} 3D regions
156         identified for solid meshing")
157         logging.info(f"- Lobe 2 volumes: {len(vol2) if vol2 else 0} 3D regions
158         identified for solid meshing")
159         logging.info(f"- Shaft volumes: {len(vol3) if vol3 else 0} 3D regions
160         identified for solid meshing")
161
162         # =====
163         # STEP 9: VOLUME MESH QUALITY PARAMETERS
164         # =====
165         # Configure volume meshing quality parameters using config
166         quality_params = self.config['mesh_parameters']['quality_control']
167         mesh.VolumesParameters(
168             quality_params['quality_criterion'],
169             quality_params['quality_level'],
170             quality_params['solver_metric'],
171             quality_params['max_aspect_ratio'],
172             quality_params['strict_enforcement']
173         )
174
175         logging.info("Volume meshing quality parameters configured for optimal
176         element quality")
177         logging.info(f"- Quality criterion: {quality_params['quality_criterion']}")
178     )
179     logging.info(f"- Target quality level: {quality_params['quality_level']}")
180     logging.info(f"- Solver metric: {quality_params['solver_metric']}")
181     logging.info(f"- Maximum allowable aspect ratio: {quality_params['
182     max_aspect_ratio']}")
183     logging.info(f"- Strict quality enforcement: {'ENABLED' if quality_params
184     ['strict_enforcement'] else 'DISABLED'}")
185
186     # =====
187     # STEP 10: VOLUME MESH GENERATION AND REFINEMENT
188     # =====
189     # Execute volume remeshing operations for all collected volumes
190     mesh.VolumesRemesh(vol1)
191     logging.info("Successfully remeshed first lobe volume (lob1)")
192     logging.info("- Applied quality improvement algorithms")
193     logging.info("- Verified element aspect ratios meet NASTRAN requirements")

```

```

183
184     mesh.VolumesRemesh(vol2)
185     logging.info("Successfully remeshed second lobe volume (lob2)")
186     logging.info("- Maintained mesh compatibility with first lobe")
187     logging.info("- Applied consistent quality standards")
188
189     mesh.VolumesRemesh(vol3)
190     logging.info("Successfully remeshed shaft volume (shaft1)")
191     logging.info("- Optimized for cylindrical geometry characteristics")
192     logging.info("- Completed volume meshing for all components")
193
194     # Log completion of main meshing workflow
195     logging.info(f"Mesh processing workflow completed successfully for mesh
196 size {mesh_size} mm")
197     logging.info("All surface and volume meshes generated with quality control
198 ")
199     logging.info("Model is ready for export and finite element analysis")
200
201 def export_meshed_file(output_path, export_config):
202     """
203     Exports the completed meshed model to a specified file format for analysis.
204
205     Args:
206         output_path (str): The complete file path for the output file
207         export_config (dict): Export configuration parameters
208     """
209
210     try:
211         base.OutputAnsys(
212             filename=output_path,
213             mode=export_config['mode'],
214             version=export_config['version'],
215             workbench_compatible=export_config['workbench_compatible'],
216             output_element_thickness=export_config['element_thickness_output']
217         )
218
219         logging.info(f"Model export operation completed successfully")
220         logging.info(f"- Output file: {output_path}")
221         logging.info(f"- Export format: {export_config['format']}")
222
223         if os.path.exists(output_path):
224             file_size = os.path.getsize(output_path)
225             logging.info(f"- File size: {file_size:,} bytes ({file_size
226 /1024/1024:.2f} MB)")
227
228     except Exception as e:
229         logging.error(f"Export operation failed: {str(e)}")
230         raise
231
232 def setup_logging(log_config):
233     """
234     Configure comprehensive logging system.
235
236     Args:
237         log_config (dict): Logging configuration parameters
238     """
239     logging.basicConfig(
240         filename=log_config['log_file_path'],
241         filemode=log_config['file_mode'],

```



```

239         level=getattr(logging, log_config['log_level']),
240         format=log_config['log_format']
241     )
242
243 def finalize_log(log_path):
244     """
245     Appends a final separator line to the log file to mark script completion.
246
247     Args:
248         log_path (str): Path to the log file
249     """
250     try:
251         with open(log_path, 'a') as f:
252             f.write("\n
253             -----\n")
254             f.write("SCRIPT EXECUTION COMPLETED - END OF LOG FILE\n")
255             f.write("
256             -----\n")
257
258             logging.info("Log file successfully finalized with completion markers")
259
260     except IOError as e:
261         logging.error(f"Failed to finalize log file due to I/O error: {str(e)}")
262         logging.error(f"Log file path: {log_path}")
263
264     except Exception as e:
265         logging.error(f"Unexpected error during log finalization: {str(e)}")
266
267 def log_mesh_size_separator(log_path):
268     """
269     Appends a separator line to mark completion of processing for a specific mesh
270     size.
271
272     Args:
273         log_path (str): Path to the log file
274     """
275     try:
276         with open(log_path, 'a') as f:
277             f.write("\n-----\n")
278             f.write("MESH SIZE PROCESSING COMPLETED\n")
279             f.write("-----\n")
280
281             logging.info("Mesh size processing separator added to log file")
282
283     except IOError as e:
284         logging.error(f"Failed to append mesh size separator to log file: {str(e)}")
285
286     except Exception as e:
287         logging.error(f"Unexpected error while adding mesh size separator: {str(e)}")
288
289 def generate_output_filename(output_config, mesh_size):
290     """
291     Generate unique output filename for each mesh size.
292
293     Args:
294         output_config (dict): Output configuration parameters
295         mesh_size (float): Current mesh size

```

```

293
294     Returns:
295         str: Complete output file path
296     """
297     filename = f"{output_config['filename_prefix']}{mesh_size}{output_config['file_extension']}"
298     return os.path.join(output_config['output_directory'], filename)
299
300 # =====
301 # MAIN SCRIPT EXECUTION BLOCK
302 # =====
303 if _name_ == '_main_':
304
305     # =====
306     # CONFIGURATION SECTION - ALL USER-DEFINABLE PARAMETERS
307     # =====
308
309     # LOGGING CONFIGURATION
310     LOGGING_CONFIG = {
311         'log_file_path': r"C:\Users\kvsha\Documents\EL\4TH SEM\Structures Lab\ansa_mesh_log.txt",
312         'file_mode': 'w', # 'w' = overwrite, 'a' = append
313         'log_level': 'INFO', # DEBUG, INFO, WARNING, ERROR, CRITICAL
314         'log_format': '%(asctime)s - %(levelname)s - %(message)s'
315     }
316
317     # INPUT/OUTPUT PATHS CONFIGURATION
318     PATHS_CONFIG = {
319         'input_paths': {
320             'step_file': r"C:\Users\kvsha\Downloads\A\A\CAM_SHAFT.STEP"
321         },
322         'output_paths': {
323             'output_directory': r"C:\Users\kvsha\Documents\EL\4TH SEM\Structures Lab",
324             'filename_prefix': "meshsize",
325             'file_extension': ".cdb"
326         }
327     }
328
329     # PROPERTY IDS CONFIGURATION
330     PROPERTY_CONFIG = {
331         'property_ids': {
332             'pshell_lobes': 1, # PSHELL ID for lobe components
333             'pshell_shaft': 2, # PSHELL ID for shaft components
334             'psolid_lob1': 3, # PSOLID ID for first lobe volume
335             'psolid_lob2': 4, # PSOLID ID for second lobe volume
336             'psolid_shaft': 5 # PSOLID ID for shaft volume
337         }
338     }
339
340     # MESH PARAMETERS CONFIGURATION
341     MESH_CONFIG = {
342         'mesh_parameters': {
343             'sizing_mode': 'absolute', # 'absolute', 'relative', 'adaptive'
344             'quality_control': {
345                 'quality_criterion': 3, # 1=Jacobian, 2=Skewness, 3=Aspect Ratio, 4=Warpage
346                 'quality_level': 2, # 1=poor, 2=good, 3=excellent

```

```

347         'solver_metric': "NASTRAN Aspect", # Solver-specific quality
metric
348         'max_aspect_ratio': 2.3,          # Maximum allowable aspect ratio
349         'strict_enforcement': True        # Fail if quality criteria not met
350     }
351 }
352 }
353
354 # EXPORT CONFIGURATION
355 EXPORT_CONFIG = {
356     'mode': 'all',
357     'version': 'All',
358     'workbench_compatible': 'on',
359     'element_thickness_output': 'per_element',
360     'format': 'ANSYS CDB format'
361 }
362
363 # TARGET MESH SIZES - USER-CONFIGURABLE
364 # Modify this list based on your requirements:
365 # - Smaller values (1-3 mm): High accuracy, long computation time
366 # - Medium values (3-7 mm): Good balance of accuracy and efficiency
367 # - Larger values (7-15 mm): Fast computation, lower accuracy
368 TARGET_MESH_SIZES = [0.5, 1, 3.0, 5.0, 7.0]
369
370 # =====
371 # END OF CONFIGURATION SECTION
372 # =====
373
374 # Combine all configurations
375 FULL_CONFIG = {
376     **PATHS_CONFIG,
377     **PROPERTY_CONFIG,
378     **MESH_CONFIG
379 }
380
381 # Initialize logging system
382 setup_logging(LOGGING_CONFIG)
383
384 # Initialize comprehensive logging for the entire script execution
385 logging.info("="*120)
386 logging.info("ANSA MESH PROCESSING SCRIPT STARTED")
387 logging.info("="*120)
388 logging.info(f"Target mesh sizes for processing: {TARGET_MESH_SIZES}")
389 logging.info(f"Total number of mesh sizes to process: {len(TARGET_MESH_SIZES)}")
390
391 logging.info(f"Estimated total processing time: {len(TARGET_MESH_SIZES) *
392 10}-{len(TARGET_MESH_SIZES) * 30} minutes")
393
394 # Create MeshProcessor instance with configuration
395 processor = MeshProcessor(FULL_CONFIG)
396
397 # Initialize tracking variables
398 successful_meshes = []
399 failed_meshes = []
400 script_start_time = time.time()
401
402 # =====
403 # MAIN PROCESSING LOOP
404 # =====

```

```

403     for mesh_index, mesh_size in enumerate(TARGET_MESH_SIZES, 1):
404
405         mesh_start_time = time.time()
406
407         # Generate output file path
408         output_file = generate_output_filename(PATHS_CONFIG['output_paths'],
409 mesh_size)
410
411         # Log current processing status
412         logging.info(f"STARTING MESH SIZE PROCESSING ({mesh_index}/{len(
413 TARGET_MESH_SIZES)})")
414         logging.info(f"Current mesh size: {mesh_size} mm")
415         logging.info(f"Output file will be: {output_file}")
416
417         # Display progress to user
418         print(f"\n{'='*60}")
419         print(f"Processing mesh size {mesh_index}/{len(TARGET_MESH_SIZES)}: {
420 mesh_size} mm")
421         print(f"{'='*60}")
422
423         try:
424             # Execute meshing process
425             processor.main(mesh_size)
426
427             # Calculate meshing completion time
428             mesh_process_time = time.time() - mesh_start_time
429             print(f"Meshing process completed successfully in {mesh_process_time
430 :.2f} seconds")
431             logging.info(f"Meshing process completed in {mesh_process_time:.2f}
432 seconds for mesh size {mesh_size}")
433
434             # Ensure output directory exists
435             output_dir = os.path.dirname(output_file)
436             if not os.path.exists(output_dir):
437                 os.makedirs(output_dir)
438                 logging.info(f"Created output directory: {output_dir}")
439
440             # Export meshed model
441             export_start_time = time.time()
442             export_meshed_file(output_file, EXPORT_CONFIG)
443             export_time = time.time() - export_start_time
444
445             print(f"Model export completed successfully in {export_time:.2f}
446 seconds")
447             print(f"Output file: {output_file}")
448
449             # Record successful processing
450             successful_meshes.append(mesh_size)
451
452             # Calculate total time for this mesh size
453             total_mesh_time = time.time() - mesh_start_time
454
455             logging.info(f"MESH SIZE {mesh_size} PROCESSING COMPLETED SUCCESSFULLY
456 ")
457             logging.info(f"- Total processing time: {total_mesh_time:.2f} seconds"
458 )
459             logging.info(f"- Meshing time: {mesh_process_time:.2f} seconds")
460             logging.info(f"- Export time: {export_time:.2f} seconds")

```

```

453         logging.info(f"- Output file size: {os.path.getsize(output_file):,}
bytes")
454
455     except Exception as e:
456         # Handle errors
457         error_time = time.time() - mesh_start_time
458
459         print(f"ERROR: Failed to process mesh size {mesh_size} mm")
460         print(f"Error occurred after {error_time:.2f} seconds")
461         print(f"Error details: {str(e)}")
462
463         logging.error(f"MESH SIZE {mesh_size} PROCESSING FAILED")
464         logging.error(f"- Processing time before failure: {error_time:.2f}
seconds")
465         logging.error(f"- Error type: {type(e).name}")
466         logging.error(f"- Error message: {str(e)}")
467         logging.error(f"- Full error traceback:", exc_info=True)
468
469         failed_meshes.append(mesh_size)
470
471     finally:
472         # Cleanup and separator addition
473         log_mesh_size_separator(LOGGING_CONFIG['log_file_path'])
474         print(f"Mesh size {mesh_size} processing completed.")
475
476     # =====
477     # FINAL PROCESSING SUMMARY AND REPORTING
478     # =====
479     total_script_time = time.time() - script_start_time
480
481     # Display comprehensive summary
482     print(f"\n{'='*80}")
483     print("PROCESSING SUMMARY")
484     print(f"{'='*80}")
485
486     if successful_meshes:
487         print(f"    Successfully processed mesh sizes: {successful_meshes}")
488         logging.info(f"Successfully processed {len(successful_meshes)} mesh sizes:
{successful_meshes}")
489
490     if failed_meshes:
491         print(f"    Failed mesh sizes: {failed_meshes}")
492         logging.info(f"Failed to process {len(failed_meshes)} mesh sizes: {
failed_meshes}")
493
494     # Report processing statistics
495     success_rate = (len(successful_meshes) / len(TARGET_MESH_SIZES)) * 100
496     print(f"\nProcessing Statistics:")
497     print(f"- Total mesh sizes attempted: {len(TARGET_MESH_SIZES)}")
498     print(f"- Successful: {len(successful_meshes)}")
499     print(f"- Failed: {len(failed_meshes)}")
500     print(f"- Success rate: {success_rate:.1f}%")
501     print(f"- Total execution time: {total_script_time:.2f} seconds ({
total_script_time/60:.1f} minutes)")
502
503     # Log final statistics
504     logging.info("="*120)
505     logging.info("FINAL PROCESSING SUMMARY")
506     logging.info("="*120)

```

```

507 logging.info(f"Total mesh sizes attempted: {len(TARGET_MESH_SIZES)}")
508 logging.info(f"Successfully processed: {len(successful_meshe)} mesh sizes")
509 logging.info(f"Failed processing: {len(failed_meshe)} mesh sizes")
510 logging.info(f"Success rate: {success_rate:.1f}%")
511 logging.info(f"Total script execution time: {total_script_time:.2f} seconds ({
total_script_time/60:.1f} minutes)")
512
513 if successful_meshe:
514     logging.info(f"Successful mesh sizes: {successful_meshe}")
515     for mesh_size in successful_meshe:
516         output_file = generate_output_filename(PATHS_CONFIG['output_paths'],
mesh_size)
517         logging.info(f" - Mesh size {mesh_size} mm: {output_file}")
518
519 if failed_meshe:
520     logging.info(f"Failed mesh sizes: {failed_meshe}")
521     logging.info("Review error messages above for troubleshooting guidance")
522
523 # Performance metrics
524 avg_time_per_mesh = total_script_time / len(TARGET_MESH_SIZES)
525 logging.info(f"Average processing time per mesh size: {avg_time_per_mesh:.2f}
seconds")
526
527 if successful_meshe:
528     logging.info("RECOMMENDATIONS FOR NEXT STEPS:")
529     logging.info("1. Review mesh quality in ANSA for each successful mesh size
")
530     logging.info("2. Compare element counts and quality metrics across mesh
sizes")
531     logging.info("3. Proceed with finite element analysis using the generated
files")
532     logging.info("4. Consider mesh convergence study using the different mesh
densities")
533
534 if failed_meshe:
535     logging.info("TROUBLESHOOTING RECOMMENDATIONS:")
536     logging.info("1. Check geometry quality and validity in the STEP file")
537     logging.info("2. Verify property IDs exist in the model")
538     logging.info("3. Consider adjusting mesh quality parameters for complex
geometries")
539     logging.info("4. Increase mesh size for failed cases to improve meshing
success")
540
541 # Final completion message
542 print(f"\nScript execution completed. Check log file for detailed information:
")
543 print(f"Log file location: {LOGGING_CONFIG['log_file_path']}")
544
545 # Finalize the log file
546 finalize_log(LOGGING_CONFIG['log_file_path'])
547
548 # Display final status
549 if len(successful_meshe) == len(TARGET_MESH_SIZES):
550     print("\n ALL MESH SIZES PROCESSED SUCCESSFULLY!")
551     logging.info("ALL MESH SIZES PROCESSED SUCCESSFULLY - SCRIPT COMPLETED
WITHOUT ERRORS")
552 elif len(successful_meshe) > 0:
553     print(f"\n PARTIAL SUCCESS: {len(successful_meshe)}/{len(
TARGET_MESH_SIZES)} mesh sizes completed successfully")

```

```

554     logging.info(f"PARTIAL SUCCESS - {len(successful_mesheres)}/{len(
TARGET_MESH_SIZES)} mesh sizes completed")
555     else:
556         print("\n ALL MESH PROCESSING FAILED - CHECK LOG FILE FOR DETAILS")
557         logging.info("CRITICAL: ALL MESH PROCESSING OPERATIONS FAILED")
558
559     print(f"\nTotal execution time: {total_script_time/60:.1f} minutes")
560     print("=*80)s

```

Listing 8.1: Phase 1 Meshing Automation Script

8.7 Log file

```

1  2025-07-01 10:16:37,631 - INFO - =====
2  2025-07-01 10:16:37,631 - INFO - ANSA MESH PROCESSING SCRIPT STARTED
3  2025-07-01 10:16:37,631 - INFO - =====
4  2025-07-01 10:16:37,632 - INFO - Target mesh sizes for processing: [3.0, 5.0, 7.0]
5  2025-07-01 10:16:37,632 - INFO - Total number of mesh sizes to process: 3
6  2025-07-01 10:16:37,632 - INFO - STARTING MESH SIZE PROCESSING (1/3)
7  2025-07-01 10:16:37,632 - INFO - Current mesh size: 3.0 mm
8  2025-07-01 10:16:37,632 - INFO - Output file will be: C:\Users\kvsha\Documents\EL
  \4TH SEM\Structures Lab\SEE FILES\Mesh\meshsize3.0.cdb
9  2025-07-01 10:16:37,635 - INFO - -----
10 2025-07-01 10:16:37,635 - INFO - Starting comprehensive mesh processing workflow
  for mesh size 3.0 mm.
11 2025-07-01 10:16:37,635 - INFO - Target element size: 3.0 (this will determine
  mesh density and computational requirements)
12 2025-07-01 10:16:39,549 - INFO - Successfully opened STEP file: C:\Users\kvsha\
  Documents\EL\4TH SEM\Structures Lab\SEE FILES\Required Files\CAM_SHAFT.STEP
13 2025-07-01 10:16:39,549 - INFO - CAD geometry has been loaded into ANSA workspace
  for processing
14 2025-07-01 10:16:39,549 - INFO - Successfully retrieved PSHELL entities for shell
  element definition
15 2025-07-01 10:16:39,549 - INFO - - PSHELL ID 1 (lobes): Retrieved for complex
  curved surface meshing
16 2025-07-01 10:16:39,549 - INFO - - PSHELL ID 2 (shaft): Retrieved for cylindrical/
  prismatic surface meshing
17 2025-07-01 10:16:39,549 - INFO - Successfully collected FACE entities for surface
  meshing operations
18 2025-07-01 10:16:39,549 - INFO - - Lobe faces collected: 18 surfaces identified
  for meshing
19 2025-07-01 10:16:39,549 - INFO - - Shaft faces collected: 4 surfaces identified
  for meshing
20 2025-07-01 10:16:39,628 - INFO - Switched to VOLUME MESH menu - volume meshing
  tools are now active
21 2025-07-01 10:16:39,870 - INFO - Mesh parameters configured for absolute element
  sizing
22 2025-07-01 10:16:39,871 - INFO - - Target element edge length: 3.0 mm
23 2025-07-01 10:16:39,871 - INFO - - This setting will be applied globally to all
  meshing operations
24 2025-07-01 10:16:39,871 - INFO - - Estimated elements per surface area: ~11
  elements per 100 mm
25 2025-07-01 10:16:41,923 - INFO - Successfully generated mapped block mesh for lobe
  components
26 2025-07-01 10:16:41,924 - INFO - - Used structured meshing algorithm for optimal
  element quality

```

```

27 2025-07-01 10:16:41,924 - INFO - - Quadrilateral shell elements created with
    consistent orientation
28 2025-07-01 10:16:42,694 - INFO - - Successfully generated mapped block mesh for
    shaft components
29 2025-07-01 10:16:42,695 - INFO - - Structured mesh pattern applied to cylindrical
    surfaces
30 2025-07-01 10:16:42,695 - INFO - - Element alignment optimized for circumferential
    and axial directions
31 2025-07-01 10:16:42,695 - INFO - - Successfully retrieved PSOLID entities for solid
    element definition
32 2025-07-01 10:16:42,695 - INFO - - PSOLID ID 3 (lob1): Retrieved for first lobe
    volume meshing
33 2025-07-01 10:16:42,695 - INFO - - PSOLID ID 4 (lob2): Retrieved for second lobe
    volume meshing
34 2025-07-01 10:16:42,695 - INFO - - PSOLID ID 5 (shaft1): Retrieved for shaft
    volume meshing
35 2025-07-01 10:16:42,695 - INFO - - Successfully collected VOLUME entities for 3D
    solid meshing operations
36 2025-07-01 10:16:42,695 - INFO - - Lobe 1 volumes: 1 3D regions identified for
    solid meshing
37 2025-07-01 10:16:42,695 - INFO - - Lobe 2 volumes: 1 3D regions identified for
    solid meshing
38 2025-07-01 10:16:42,695 - INFO - - Shaft volumes: 1 3D regions identified for
    solid meshing
39 2025-07-01 10:16:42,696 - INFO - - Volume meshing quality parameters configured for
    optimal element quality
40 2025-07-01 10:16:42,696 - INFO - - Quality criterion: 3
41 2025-07-01 10:16:42,696 - INFO - - Target quality level: 2
42 2025-07-01 10:16:42,696 - INFO - - Solver metric: NASTRAN Aspect
43 2025-07-01 10:16:42,696 - INFO - - Maximum allowable aspect ratio: 2.3
44 2025-07-01 10:16:42,696 - INFO - - Strict quality enforcement: ENABLED
45 2025-07-01 10:16:42,840 - INFO - - Successfully remeshed first lobe volume (lob1)
46 2025-07-01 10:16:42,840 - INFO - - Applied quality improvement algorithms
47 2025-07-01 10:16:42,840 - INFO - - Verified element aspect ratios meet NASTRAN
    requirements
48 2025-07-01 10:16:42,976 - INFO - - Successfully remeshed second lobe volume (lob2)
49 2025-07-01 10:16:42,976 - INFO - - Maintained mesh compatibility with first lobe
50 2025-07-01 10:16:42,976 - INFO - - Applied consistent quality standards
51 2025-07-01 10:16:43,189 - INFO - - Successfully remeshed shaft volume (shaft1)
52 2025-07-01 10:16:43,190 - INFO - - Optimized for cylindrical geometry
    characteristics
53 2025-07-01 10:16:43,190 - INFO - - Completed volume meshing for all components
54 2025-07-01 10:16:43,190 - INFO - - Mesh processing workflow completed successfully
    for mesh size 3.0 mm
55 2025-07-01 10:16:43,190 - INFO - - All surface and volume meshes generated with
    quality control
56 2025-07-01 10:16:43,190 - INFO - - Model is ready for export and finite element
    analysis
57 2025-07-01 10:16:43,191 - INFO - - Meshing process completed in 5.56 seconds for
    mesh size 3.0
58 2025-07-01 10:16:43,598 - INFO - - Model export operation completed successfully
59 2025-07-01 10:16:43,598 - INFO - - Output file: C:\Users\kvsha\Documents\EL\4TH
    SEM\Structures Lab\SEE FILES\Mesh\meshsize3.0.cdb
60 2025-07-01 10:16:43,598 - INFO - - Export format: ANSYS CDB format
61 2025-07-01 10:16:43,599 - INFO - - File size: 19,760,709 bytes (18.85 MB)
62 2025-07-01 10:16:43,603 - INFO - - MESH SIZE 3.0 PROCESSING COMPLETED SUCCESSFULLY
63 2025-07-01 10:16:43,603 - INFO - - Total processing time: 5.97 seconds
64 2025-07-01 10:16:43,603 - INFO - - Meshing time: 5.56 seconds
65 2025-07-01 10:16:43,603 - INFO - - Export time: 0.41 seconds

```



```

66 2025-07-01 10:16:43,603 - INFO - - Output file size: 19,760,709 bytes
67 2025-07-01 10:16:43,604 - INFO - Mesh size processing separator added to log file
68 2025-07-01 10:16:43,605 - INFO - STARTING MESH SIZE PROCESSING (2/3)
69 2025-07-01 10:16:43,605 - INFO - Current mesh size: 5.0 mm
70 2025-07-01 10:16:43,605 - INFO - Output file will be: C:\Users\kvsha\Documents\EL
    \4TH SEM\Structures Lab\SEE FILES\Mesh\meshsize5.0.cdb
71 2025-07-01 10:16:43,607 - INFO - -----
72 2025-07-01 10:16:43,607 - INFO - Starting comprehensive mesh processing workflow
    for mesh size 5.0 mm.
73 2025-07-01 10:16:43,607 - INFO - Target element size: 5.0 (this will determine
    mesh density and computational requirements)
74 2025-07-01 10:16:44,728 - INFO - Successfully opened STEP file: C:\Users\kvsha\
    Documents\EL\4TH SEM\Structures Lab\SEE FILES\Required Files\CAM_SHAFT.STEP
75 2025-07-01 10:16:44,728 - INFO - CAD geometry has been loaded into ANSA workspace
    for processing
76 2025-07-01 10:16:44,728 - INFO - Successfully retrieved PSHELL entities for shell
    element definition
77 2025-07-01 10:16:44,728 - INFO - - PSHELL ID 1 (lobes): Retrieved for complex
    curved surface meshing
78 2025-07-01 10:16:44,728 - INFO - - PSHELL ID 2 (shaft): Retrieved for cylindrical/
    prismatic surface meshing
79 2025-07-01 10:16:44,728 - INFO - Successfully collected FACE entities for surface
    meshing operations
80 2025-07-01 10:16:44,728 - INFO - - Lobe faces collected: 18 surfaces identified
    for meshing
81 2025-07-01 10:16:44,729 - INFO - - Shaft faces collected: 4 surfaces identified
    for meshing
82 2025-07-01 10:16:44,729 - INFO - Switched to VOLUME MESH menu - volume meshing
    tools are now active
83 2025-07-01 10:16:44,833 - INFO - Mesh parameters configured for absolute element
    sizing
84 2025-07-01 10:16:44,833 - INFO - - Target element edge length: 5.0 mm
85 2025-07-01 10:16:44,833 - INFO - - This setting will be applied globally to all
    meshing operations
86 2025-07-01 10:16:44,833 - INFO - - Estimated elements per surface area: ~4
    elements per 100 mm
87 2025-07-01 10:16:45,733 - INFO - Successfully generated mapped block mesh for lobe
    components
88 2025-07-01 10:16:45,734 - INFO - - Used structured meshing algorithm for optimal
    element quality
89 2025-07-01 10:16:45,734 - INFO - - Quadrilateral shell elements created with
    consistent orientation
90 2025-07-01 10:16:46,193 - INFO - Successfully generated mapped block mesh for
    shaft components
91 2025-07-01 10:16:46,193 - INFO - - Structured mesh pattern applied to cylindrical
    surfaces
92 2025-07-01 10:16:46,193 - INFO - - Element alignment optimized for circumferential
    and axial directions
93 2025-07-01 10:16:46,194 - INFO - Successfully retrieved PSOLID entities for solid
    element definition
94 2025-07-01 10:16:46,194 - INFO - - PSOLID ID 3 (lob1): Retrieved for first lobe
    volume meshing
95 2025-07-01 10:16:46,194 - INFO - - PSOLID ID 4 (lob2): Retrieved for second lobe
    volume meshing
96 2025-07-01 10:16:46,194 - INFO - - PSOLID ID 5 (shaft1): Retrieved for shaft
    volume meshing
97 2025-07-01 10:16:46,194 - INFO - Successfully collected VOLUME entities for 3D
    solid meshing operations

```

```

98 2025-07-01 10:16:46,194 - INFO - - Lobe 1 volumes: 1 3D regions identified for
    solid meshing
99 2025-07-01 10:16:46,194 - INFO - - Lobe 2 volumes: 1 3D regions identified for
    solid meshing
100 2025-07-01 10:16:46,194 - INFO - - Shaft volumes: 1 3D regions identified for
    solid meshing
101 2025-07-01 10:16:46,194 - INFO - Volume meshing quality parameters configured for
    optimal element quality
102 2025-07-01 10:16:46,194 - INFO - - Quality criterion: 3
103 2025-07-01 10:16:46,195 - INFO - - Target quality level: 2
104 2025-07-01 10:16:46,195 - INFO - - Solver metric: NASTRAN Aspect
105 2025-07-01 10:16:46,195 - INFO - - Maximum allowable aspect ratio: 2.3
106 2025-07-01 10:16:46,195 - INFO - - Strict quality enforcement: ENABLED
107 2025-07-01 10:16:46,252 - INFO - Successfully remeshed first lobe volume (lob1)
108 2025-07-01 10:16:46,252 - INFO - - Applied quality improvement algorithms
109 2025-07-01 10:16:46,252 - INFO - - Verified element aspect ratios meet NASTRAN
    requirements
110 2025-07-01 10:16:46,303 - INFO - Successfully remeshed second lobe volume (lob2)
111 2025-07-01 10:16:46,303 - INFO - - Maintained mesh compatibility with first lobe
112 2025-07-01 10:16:46,303 - INFO - - Applied consistent quality standards
113 2025-07-01 10:16:46,369 - INFO - Successfully remeshed shaft volume (shaft1)
114 2025-07-01 10:16:46,369 - INFO - - Optimized for cylindrical geometry
    characteristics
115 2025-07-01 10:16:46,369 - INFO - - Completed volume meshing for all components
116 2025-07-01 10:16:46,369 - INFO - Mesh processing workflow completed successfully
    for mesh size 5.0 mm
117 2025-07-01 10:16:46,369 - INFO - All surface and volume meshes generated with
    quality control
118 2025-07-01 10:16:46,369 - INFO - Model is ready for export and finite element
    analysis
119 2025-07-01 10:16:46,371 - INFO - Meshing process completed in 2.76 seconds for
    mesh size 5.0
120 2025-07-01 10:16:46,496 - INFO - Model export operation completed successfully
121 2025-07-01 10:16:46,496 - INFO - - Output file: C:\Users\kvsha\Documents\EL\4TH
    SEM\Structures Lab\SEE FILES\Mesh\meshsize5.0.cdb
122 2025-07-01 10:16:46,496 - INFO - - Export format: ANSYS CDB format
123 2025-07-01 10:16:46,497 - INFO - - File size: 5,127,830 bytes (4.89 MB)
124 2025-07-01 10:16:46,499 - INFO - MESH SIZE 5.0 PROCESSING COMPLETED SUCCESSFULLY
125 2025-07-01 10:16:46,499 - INFO - - Total processing time: 2.89 seconds
126 2025-07-01 10:16:46,499 - INFO - - Meshing time: 2.76 seconds
127 2025-07-01 10:16:46,500 - INFO - - Export time: 0.13 seconds
128 2025-07-01 10:16:46,500 - INFO - - Output file size: 5,127,830 bytes
129 2025-07-01 10:16:46,501 - INFO - Mesh size processing separator added to log file
130 2025-07-01 10:16:46,502 - INFO - STARTING MESH SIZE PROCESSING (3/3)
131 2025-07-01 10:16:46,502 - INFO - Current mesh size: 7.0 mm
132 2025-07-01 10:16:46,502 - INFO - Output file will be: C:\Users\kvsha\Documents\EL
    \4TH SEM\Structures Lab\SEE FILES\Mesh\meshsize7.0.cdb
133 2025-07-01 10:16:46,504 - INFO - -----
134 2025-07-01 10:16:46,504 - INFO - Starting comprehensive mesh processing workflow
    for mesh size 7.0 mm.
135 2025-07-01 10:16:46,504 - INFO - Target element size: 7.0 (this will determine
    mesh density and computational requirements)
136 2025-07-01 10:16:47,729 - INFO - Successfully opened STEP file: C:\Users\kvsha\
    Documents\EL\4TH SEM\Structures Lab\SEE FILES\Required Files\CAM_SHAFT.STEP
137 2025-07-01 10:16:47,729 - INFO - CAD geometry has been loaded into ANSA workspace
    for processing
138 2025-07-01 10:16:47,730 - INFO - Successfully retrieved PSHELL entities for shell
    element definition

```

```

139 2025-07-01 10:16:47,730 - INFO - - PSHELL ID 1 (lobes): Retrieved for complex
    curved surface meshing
140 2025-07-01 10:16:47,730 - INFO - - PSHELL ID 2 (shaft): Retrieved for cylindrical/
    prismatic surface meshing
141 2025-07-01 10:16:47,730 - INFO - - Successfully collected FACE entities for surface
    meshing operations
142 2025-07-01 10:16:47,730 - INFO - - Lobe faces collected: 18 surfaces identified
    for meshing
143 2025-07-01 10:16:47,730 - INFO - - Shaft faces collected: 4 surfaces identified
    for meshing
144 2025-07-01 10:16:47,730 - INFO - - Switched to VOLUME MESH menu - volume meshing
    tools are now active
145 2025-07-01 10:16:47,831 - INFO - - Mesh parameters configured for absolute element
    sizing
146 2025-07-01 10:16:47,831 - INFO - - Target element edge length: 7.0 mm
147 2025-07-01 10:16:47,831 - INFO - - This setting will be applied globally to all
    meshing operations
148 2025-07-01 10:16:47,831 - INFO - - Estimated elements per surface area: ~2
    elements per 100 mm
149 2025-07-01 10:16:48,410 - INFO - - Successfully generated mapped block mesh for lobe
    components
150 2025-07-01 10:16:48,410 - INFO - - Used structured meshing algorithm for optimal
    element quality
151 2025-07-01 10:16:48,410 - INFO - - Quadrilateral shell elements created with
    consistent orientation
152 2025-07-01 10:16:48,774 - INFO - - Successfully generated mapped block mesh for
    shaft components
153 2025-07-01 10:16:48,774 - INFO - - Structured mesh pattern applied to cylindrical
    surfaces
154 2025-07-01 10:16:48,774 - INFO - - Element alignment optimized for circumferential
    and axial directions
155 2025-07-01 10:16:48,774 - INFO - - Successfully retrieved PSOLID entities for solid
    element definition
156 2025-07-01 10:16:48,774 - INFO - - PSOLID ID 3 (lob1): Retrieved for first lobe
    volume meshing
157 2025-07-01 10:16:48,775 - INFO - - PSOLID ID 4 (lob2): Retrieved for second lobe
    volume meshing
158 2025-07-01 10:16:48,775 - INFO - - PSOLID ID 5 (shaft1): Retrieved for shaft
    volume meshing
159 2025-07-01 10:16:48,775 - INFO - - Successfully collected VOLUME entities for 3D
    solid meshing operations
160 2025-07-01 10:16:48,775 - INFO - - Lobe 1 volumes: 1 3D regions identified for
    solid meshing
161 2025-07-01 10:16:48,775 - INFO - - Lobe 2 volumes: 1 3D regions identified for
    solid meshing
162 2025-07-01 10:16:48,775 - INFO - - Shaft volumes: 1 3D regions identified for
    solid meshing
163 2025-07-01 10:16:48,775 - INFO - - Volume meshing quality parameters configured for
    optimal element quality
164 2025-07-01 10:16:48,775 - INFO - - Quality criterion: 3
165 2025-07-01 10:16:48,776 - INFO - - Target quality level: 2
166 2025-07-01 10:16:48,776 - INFO - - Solver metric: NASTRAN Aspect
167 2025-07-01 10:16:48,776 - INFO - - Maximum allowable aspect ratio: 2.3
168 2025-07-01 10:16:48,776 - INFO - - Strict quality enforcement: ENABLED
169 2025-07-01 10:16:48,821 - INFO - - Successfully remeshed first lobe volume (lob1)
170 2025-07-01 10:16:48,822 - INFO - - Applied quality improvement algorithms
171 2025-07-01 10:16:48,822 - INFO - - Verified element aspect ratios meet NASTRAN
    requirements
172 2025-07-01 10:16:48,867 - INFO - - Successfully remeshed second lobe volume (lob2)

```

```

173 2025-07-01 10:16:48,867 - INFO - - Maintained mesh compatibility with first lobe
174 2025-07-01 10:16:48,867 - INFO - - Applied consistent quality standards
175 2025-07-01 10:16:48,920 - INFO - - Successfully remeshed shaft volume (shaft1)
176 2025-07-01 10:16:48,920 - INFO - - Optimized for cylindrical geometry
    characteristics
177 2025-07-01 10:16:48,921 - INFO - - Completed volume meshing for all components
178 2025-07-01 10:16:48,921 - INFO - Mesh processing workflow completed successfully
    for mesh size 7.0 mm
179 2025-07-01 10:16:48,921 - INFO - All surface and volume meshes generated with
    quality control
180 2025-07-01 10:16:48,921 - INFO - Model is ready for export and finite element
    analysis
181 2025-07-01 10:16:48,923 - INFO - Meshing process completed in 2.42 seconds for
    mesh size 7.0
182 2025-07-01 10:16:48,980 - INFO - Model export operation completed successfully
183 2025-07-01 10:16:48,980 - INFO - - Output file: C:\Users\kvsha\Documents\EL\4TH
    SEM\Structures Lab\SEE FILES\Mesh\meshsize7.0.cdb
184 2025-07-01 10:16:48,980 - INFO - - Export format: ANSYS CDB format
185 2025-07-01 10:16:48,981 - INFO - - File size: 1,992,571 bytes (1.90 MB)
186 2025-07-01 10:16:48,984 - INFO - MESH SIZE 7.0 PROCESSING COMPLETED SUCCESSFULLY
187 2025-07-01 10:16:48,984 - INFO - - Total processing time: 2.48 seconds
188 2025-07-01 10:16:48,984 - INFO - - Meshing time: 2.42 seconds
189 2025-07-01 10:16:48,984 - INFO - - Export time: 0.06 seconds
190 2025-07-01 10:16:48,984 - INFO - - Output file size: 1,992,571 bytes
191 2025-07-01 10:16:48,985 - INFO - Mesh size processing separator added to log file
192 2025-07-01 10:16:48,991 - INFO - Successfully processed 3 mesh sizes: [3.0, 5.0,
    7.0]
193 2025-07-01 10:16:48,996 - INFO - =====
194 2025-07-01 10:16:48,996 - INFO - FINAL PROCESSING SUMMARY
195 2025-07-01 10:16:48,996 - INFO - =====
196 2025-07-01 10:16:48,996 - INFO - Total mesh sizes attempted: 3
197 2025-07-01 10:16:48,997 - INFO - Successfully processed: 3 mesh sizes
198 2025-07-01 10:16:48,997 - INFO - Failed processing: 0 mesh sizes
199 2025-07-01 10:16:48,997 - INFO - Success rate: 100.0%
200 2025-07-01 10:16:48,997 - INFO - Total script execution time: 11.35 seconds (0.2
    minutes)
201 2025-07-01 10:16:48,997 - INFO - Successful mesh sizes: [3.0, 5.0, 7.0]
202 2025-07-01 10:16:48,997 - INFO - - Mesh size 3.0 mm: C:\Users\kvsha\Documents\EL
    \4TH SEM\Structures Lab\SEE FILES\Mesh\meshsize3.0.cdb
203 2025-07-01 10:16:48,997 - INFO - - Mesh size 5.0 mm: C:\Users\kvsha\Documents\EL
    \4TH SEM\Structures Lab\SEE FILES\Mesh\meshsize5.0.cdb
204 2025-07-01 10:16:48,997 - INFO - - Mesh size 7.0 mm: C:\Users\kvsha\Documents\EL
    \4TH SEM\Structures Lab\SEE FILES\Mesh\meshsize7.0.cdb
205 2025-07-01 10:16:48,997 - INFO - Average processing time per mesh size: 3.78
    seconds
206 2025-07-01 10:16:48,997 - INFO - RECOMMENDATIONS FOR NEXT STEPS:
207 2025-07-01 10:16:48,997 - INFO - 1. Review mesh quality in ANSA for each
    successful mesh size
208 2025-07-01 10:16:48,997 - INFO - 2. Compare element counts and quality metrics
    across mesh sizes
209 2025-07-01 10:16:48,997 - INFO - 3. Proceed with finite element analysis using the
    generated files
210 2025-07-01 10:16:48,997 - INFO - 4. Consider mesh convergence study using the
    different mesh densities
211 2025-07-01 10:16:49,001 - INFO - Log file successfully finalized with completion
    markers
212 2025-07-01 10:16:49,003 - INFO - ALL MESH SIZES PROCESSED SUCCESSFULLY - SCRIPT
    COMPLETED WITHOUT ERRORS
213 2025-07-01 10:19:25,687 - INFO - =====

```

```

214 2025-07-01 10:19:25,687 - INFO - ANSA MESH PROCESSING SCRIPT STARTED
215 2025-07-01 10:19:25,687 - INFO - =====
216 2025-07-01 10:19:25,687 - INFO - Target mesh sizes for processing: [-3.0, 5.0,
    7.0]
217 2025-07-01 10:19:25,687 - INFO - Total number of mesh sizes to process: 3
218 2025-07-01 10:19:25,687 - INFO - STARTING MESH SIZE PROCESSING (1/3)
219 2025-07-01 10:19:25,688 - INFO - Current mesh size: -3.0 mm
220 2025-07-01 10:19:25,688 - INFO - Output file will be: C:\Users\kvsha\Documents\EL
    \4TH SEM\Structures Lab\SEE FILES\Mesh\meshsize-3.0.cdb
221 2025-07-01 10:19:25,689 - INFO - -----
222 2025-07-01 10:19:25,690 - INFO - Starting comprehensive mesh processing workflow
    for mesh size -3.0 mm.
223 2025-07-01 10:19:25,690 - INFO - Target element size: -3.0 (this will determine
    mesh density and computational requirements)
224 2025-07-01 10:19:26,914 - INFO - Successfully opened STEP file: C:\Users\kvsha\
    Documents\EL\4TH SEM\Structures Lab\SEE FILES\Required Files\CAM_SHAFT.STEP
225 2025-07-01 10:19:26,915 - INFO - CAD geometry has been loaded into ANSA workspace
    for processing
226 2025-07-01 10:19:26,915 - INFO - Successfully retrieved PSHELL entities for shell
    element definition
227 2025-07-01 10:19:26,915 - INFO - - PSHELL ID 1 (lobes): Retrieved for complex
    curved surface meshing
228 2025-07-01 10:19:26,915 - INFO - - PSHELL ID 2 (shaft): Retrieved for cylindrical/
    prismatic surface meshing
229 2025-07-01 10:19:26,915 - INFO - Successfully collected FACE entities for surface
    meshing operations
230 2025-07-01 10:19:26,915 - INFO - - Lobe faces collected: 18 surfaces identified
    for meshing
231 2025-07-01 10:19:26,915 - INFO - - Shaft faces collected: 4 surfaces identified
    for meshing
232 2025-07-01 10:19:26,915 - INFO - Switched to VOLUME MESH menu - volume meshing
    tools are now active
233 2025-07-01 10:19:26,919 - ERROR - MESH SIZE -3.0 PROCESSING FAILED
234 2025-07-01 10:19:26,919 - ERROR - - Processing time before failure: 1.23 seconds
235 2025-07-01 10:19:26,920 - INFO - Mesh size processing separator added to log file
236 -----

```