
Complete XIAO + Wio stack plugs into J1/J2; radio wiring stays inside stack.

USB-C on XIAO supplies power. W5500 is supplied directly from XIAO 3V3.

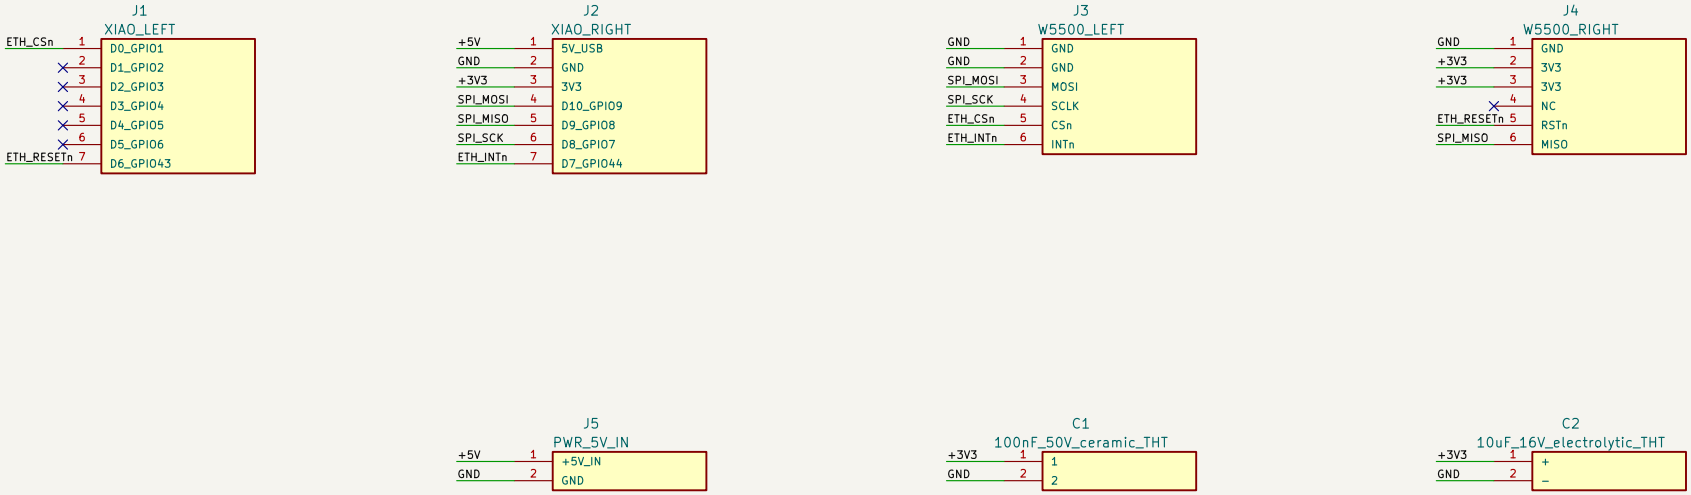

ARCELI header spacing provisionally 20.32 mm; check physical module before manufacture.

J3/J4 pin 1 is at RJ45 end, module viewed from above. NC stays open.

Carrier does not reroute LoRa control pins. Firmware must match actual stack variant.

C1/C2: local Ethernet supply decoupling. PoE not implemented in this draft.

CHECK MODULE FIT BEFORE FABRICATION

Sheet: /
File: SILOAD REV A.kicad_sch

Title: SILOAD REV A – Farm hub carrier

Size: A4	Date: 2026-10-27	**Rev: A DRAFT**
KiCad E.D.A. 10.0.6		Id: 1/1