

1

2

3

4




5

6

7

A

P1

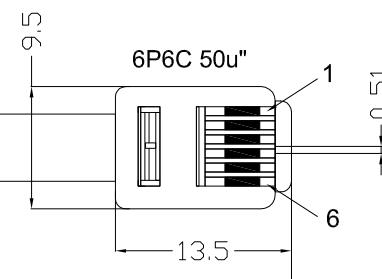

P2

A

B

B

C

C

D



D

E

E

F

F

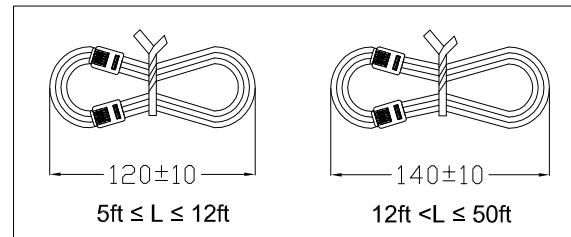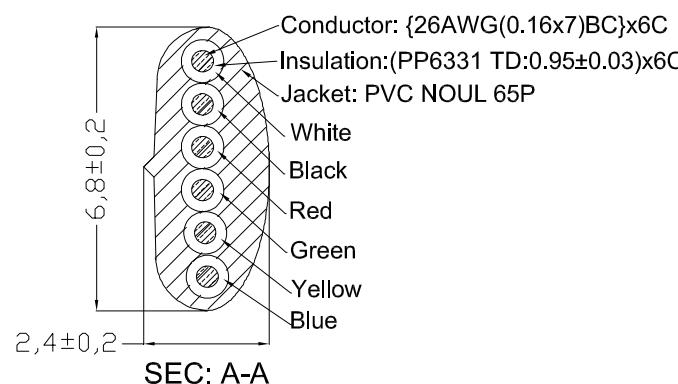

P1	P2
1 White	6
2 Black	5
3 Red	4
4 Green	3
5 Yellow	2
6 Blue	1

Note for plug:

Material:
Housing-Polycarbonate,clear.
Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area,Gold flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate

Order code: AT-S-26-6/6/X-XX

Order color:
B: Black
W: White
S: Silver

Length Code	Length (mm)
5	1525±20(5FT)
7	2135±30(7FT)
10	3050±60(10FT)
12	3660±60(12FT)
14	4270±60(14FT)
25	7625±100(25FT)
50	15250±150(50FT)

RoHS compliant
Unit: mm

Scale	Free	TOLERANCE	DIM	TOL	①	Drawn	Date	Name
							18.12.2017	Amy
.x	±0.50					Approved	18.12.2017	Amy
.xx	±0.20							
Angle	±2°	Id.						

Drawn
18.12.2017
Amy

ASSMANN
www.assmann.com

Customer-No.

ASSMANN WSW-No.
AT-S-26-6/6/X-XX

Drawing-No.

ASS 8168 CA rev00

Replace

G

H

1

2

3

4

5

6

7