

SCREW COMPRESSOR INSPECTION REPORT

Customer : HOS BV
Ref . : Inspection
Order :
Contact person : Ted Swart
Date :
Compressor type : Mycom 200 SUD-HE
Serial nr : 2053474
Running hours : 30619
Refrigerant : NH3
Type oil :
Inspected by :

INSPECTION AND REPAIR SCOPE

Opened compressor for inspection of thrust-bearings , measuring the axial play and the “end-clearance “.

MEASUREMENTS AND CLEARANCES

END CLEARANCE	male	within factory settings
	female	within factory settings

RUN OUT (male shaft)	0.001 mm
------------------------	----------

THRUST BEARING CONDITION	male	good , no wear
	female	good , no wear

AXIAL PLAY	male	0.00 mm
	female	0.00 mm

INDICATOR ASSEMBLY CONDITION	working
------------------------------	----------------

FLANGES PRESENT	suction	no , compressor mounted on skid
	discharge	no , compressor mounted on skid

TYPE SEAL	Double seal in good conditioning.
-----------	--

NEW PARTS ADDED TO MACHINE

SEAL PARTS

LOCKNUTS & WASHERS	X
--------------------	----------

THRUSTBEARINGS

MAINBEARINGS :

O-RING & GASKETS :	X
--------------------	----------

BALANCEPISTON & SLEEVE

GUIDEBLOCK & PIN

PARTS MACHINED & METAL REMOVED


LEAKTEST with NITROGEN	X
------------------------	----------

SLIDEVALVE TEST with NITROGEN PRESSURE	X
--	----------







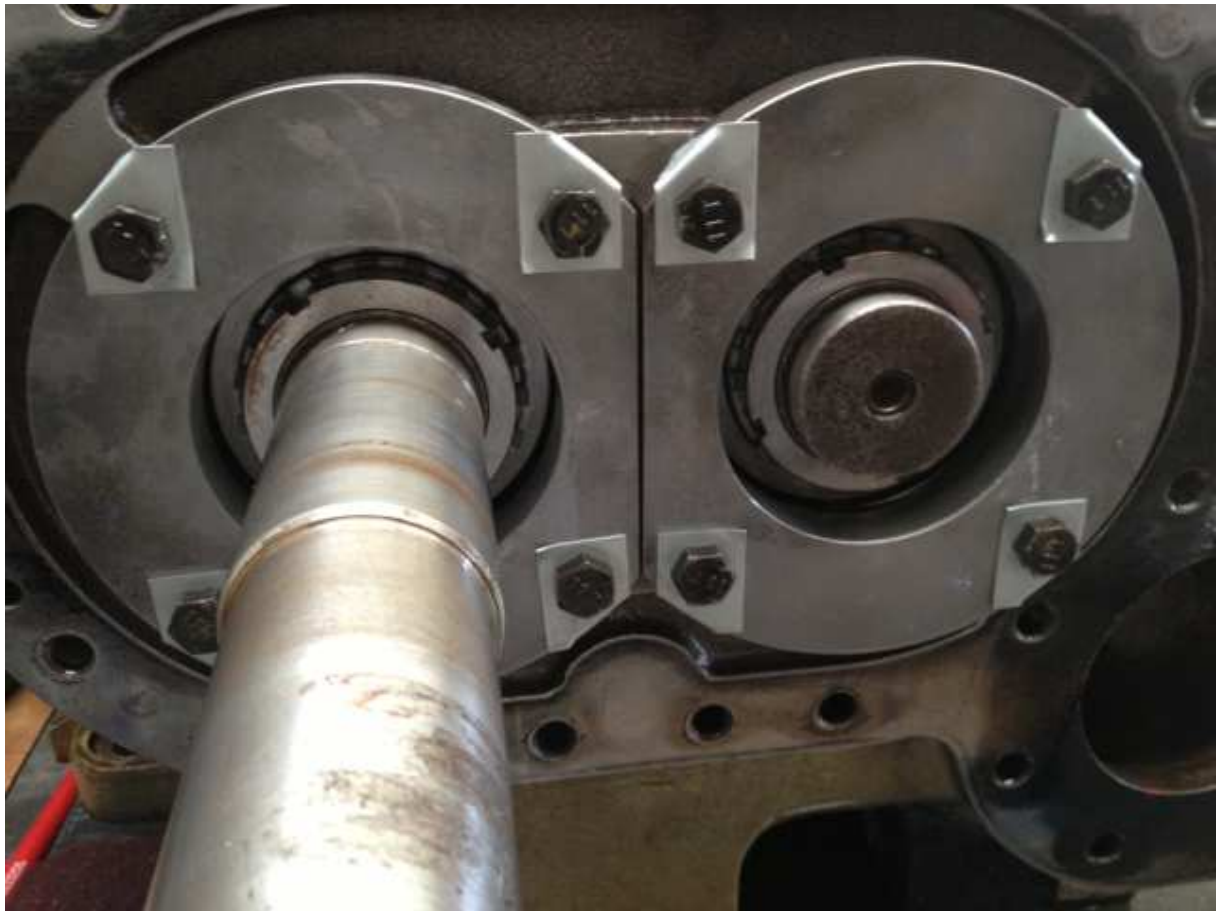





SCREW COMPRESSOR INSPECTION REPORT

Customer : HOS BV
Ref . : Inspection
Order :
Contact person : Ted Swart
Date :
Compressor type : Mycom 200 SUD-HE
Serial nr : 2053500
Running hours : 37639
Refrigerant : NH3
Type oil :
Inspected by :

INSPECTION AND REPAIR SCOPE

Opened compressor for inspection of thrust-bearings , measuring the axial play and the “end-clearance “.

MEASUREMENTS AND CLEARANCES

END CLEARANCE	male	within factory settings
	female	within factory settings

RUN OUT (male shaft)	0.001 mm
------------------------	----------

THRUST BEARING CONDITION	male	good , no wear
	female	good , no wear

AXIAL PLAY	male	0.00 mm
	female	0.00 mm

INDICATOR ASSEMBLY CONDITION	working
------------------------------	----------------

FLANGES PRESENT	suction	no , compressor mounted on skid
	discharge	no , compressor mounted on skid

TYPE SEAL	Double seal in good conditioning.
-----------	--

NEW PARTS ADDED TO MACHINE

SEAL PARTS	X
------------	----------

LOCKNUTS & WASHERS	
--------------------	--

THRUSTBEARINGS	
----------------	--

MAINBEARINGS :	
----------------	--

O-RING & GASKETS :	X
--------------------	----------

BALANCEPISTON & SLEEVE	
------------------------	--

GUIDEBLOCK & PIN	
------------------	--

PARTS MACHINED & METAL REMOVED	
--------------------------------	--

LEAKTEST with NITROGEN	X
------------------------	----------

SLIDEVALVE TEST with NITROGEN PRESSURE	X
--	----------



