


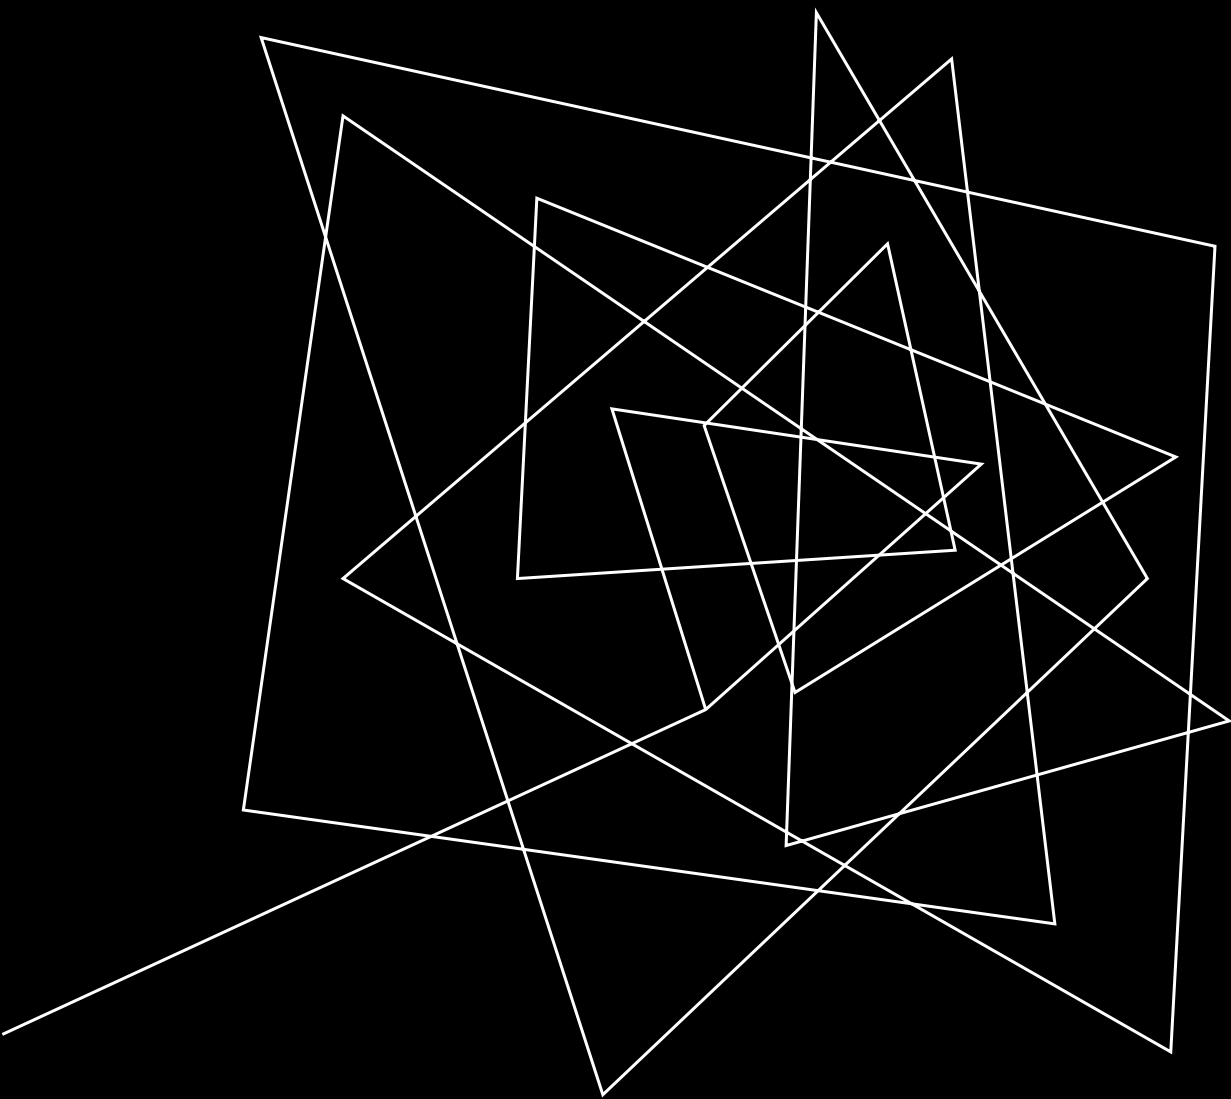

TECHNICAL SPECIFICATIONS

BT FULL TURN TECHNICAL SPECIFICATIONS

S.No	Technical Parameter	Technical Specification
1	Operating Mechanism	Full Turn Operation
2	Compliance Standard	EN 200
3	Connection Thread Size	½" BSP Brass Thread
4	Maximum Working Pressure	16 Bar
5	Maximum Torque Rating	10 Nm
6	Nominal Flow Rate	12 – 15 LPM
7	Product Service Life	200,000 Operating Cycles
8	Available Colour Options	White, Almond, Charcoal, Blue
9	Warranty Period	5 Years

GT FULL TURN TECHNICAL SPECIFICATIONS

S .No	Technical Parameter	Technical Specification
1	Operating Mechanism	Full Turn Operation
2	Connection Thread Size	½" BSP Polymer Thread
3	Maximum Working Pressure	10 Bar
4	Maximum Torque Rating	8 Nm
5	Nominal Flow Rate	12 – 15 LPM
6	Product Service Life	100,000 Operating Cycles
7	Available Colour Options	White, Almond, Charcoal, Blue
8	Warranty Period	1 Years

BT QUARTER TURN TECHNICAL SPECIFICATIONS

S .No	Technical Parameter	Technical Specification
1	Operating Mechanism	Quarter Turn Operation
2	Connection Thread Size	½" BSP Brass Thread
3	Maximum Working Pressure	16 Bar
4	Maximum Torque Rating	10 Nm
5	Nominal Flow Rate	12 – 15 LPM
6	Product Service Life	200,000 Operating Cycles
7	Available Colour Options	White, Almond, Charcoal, Blue
8	Warranty Period	5 Years