





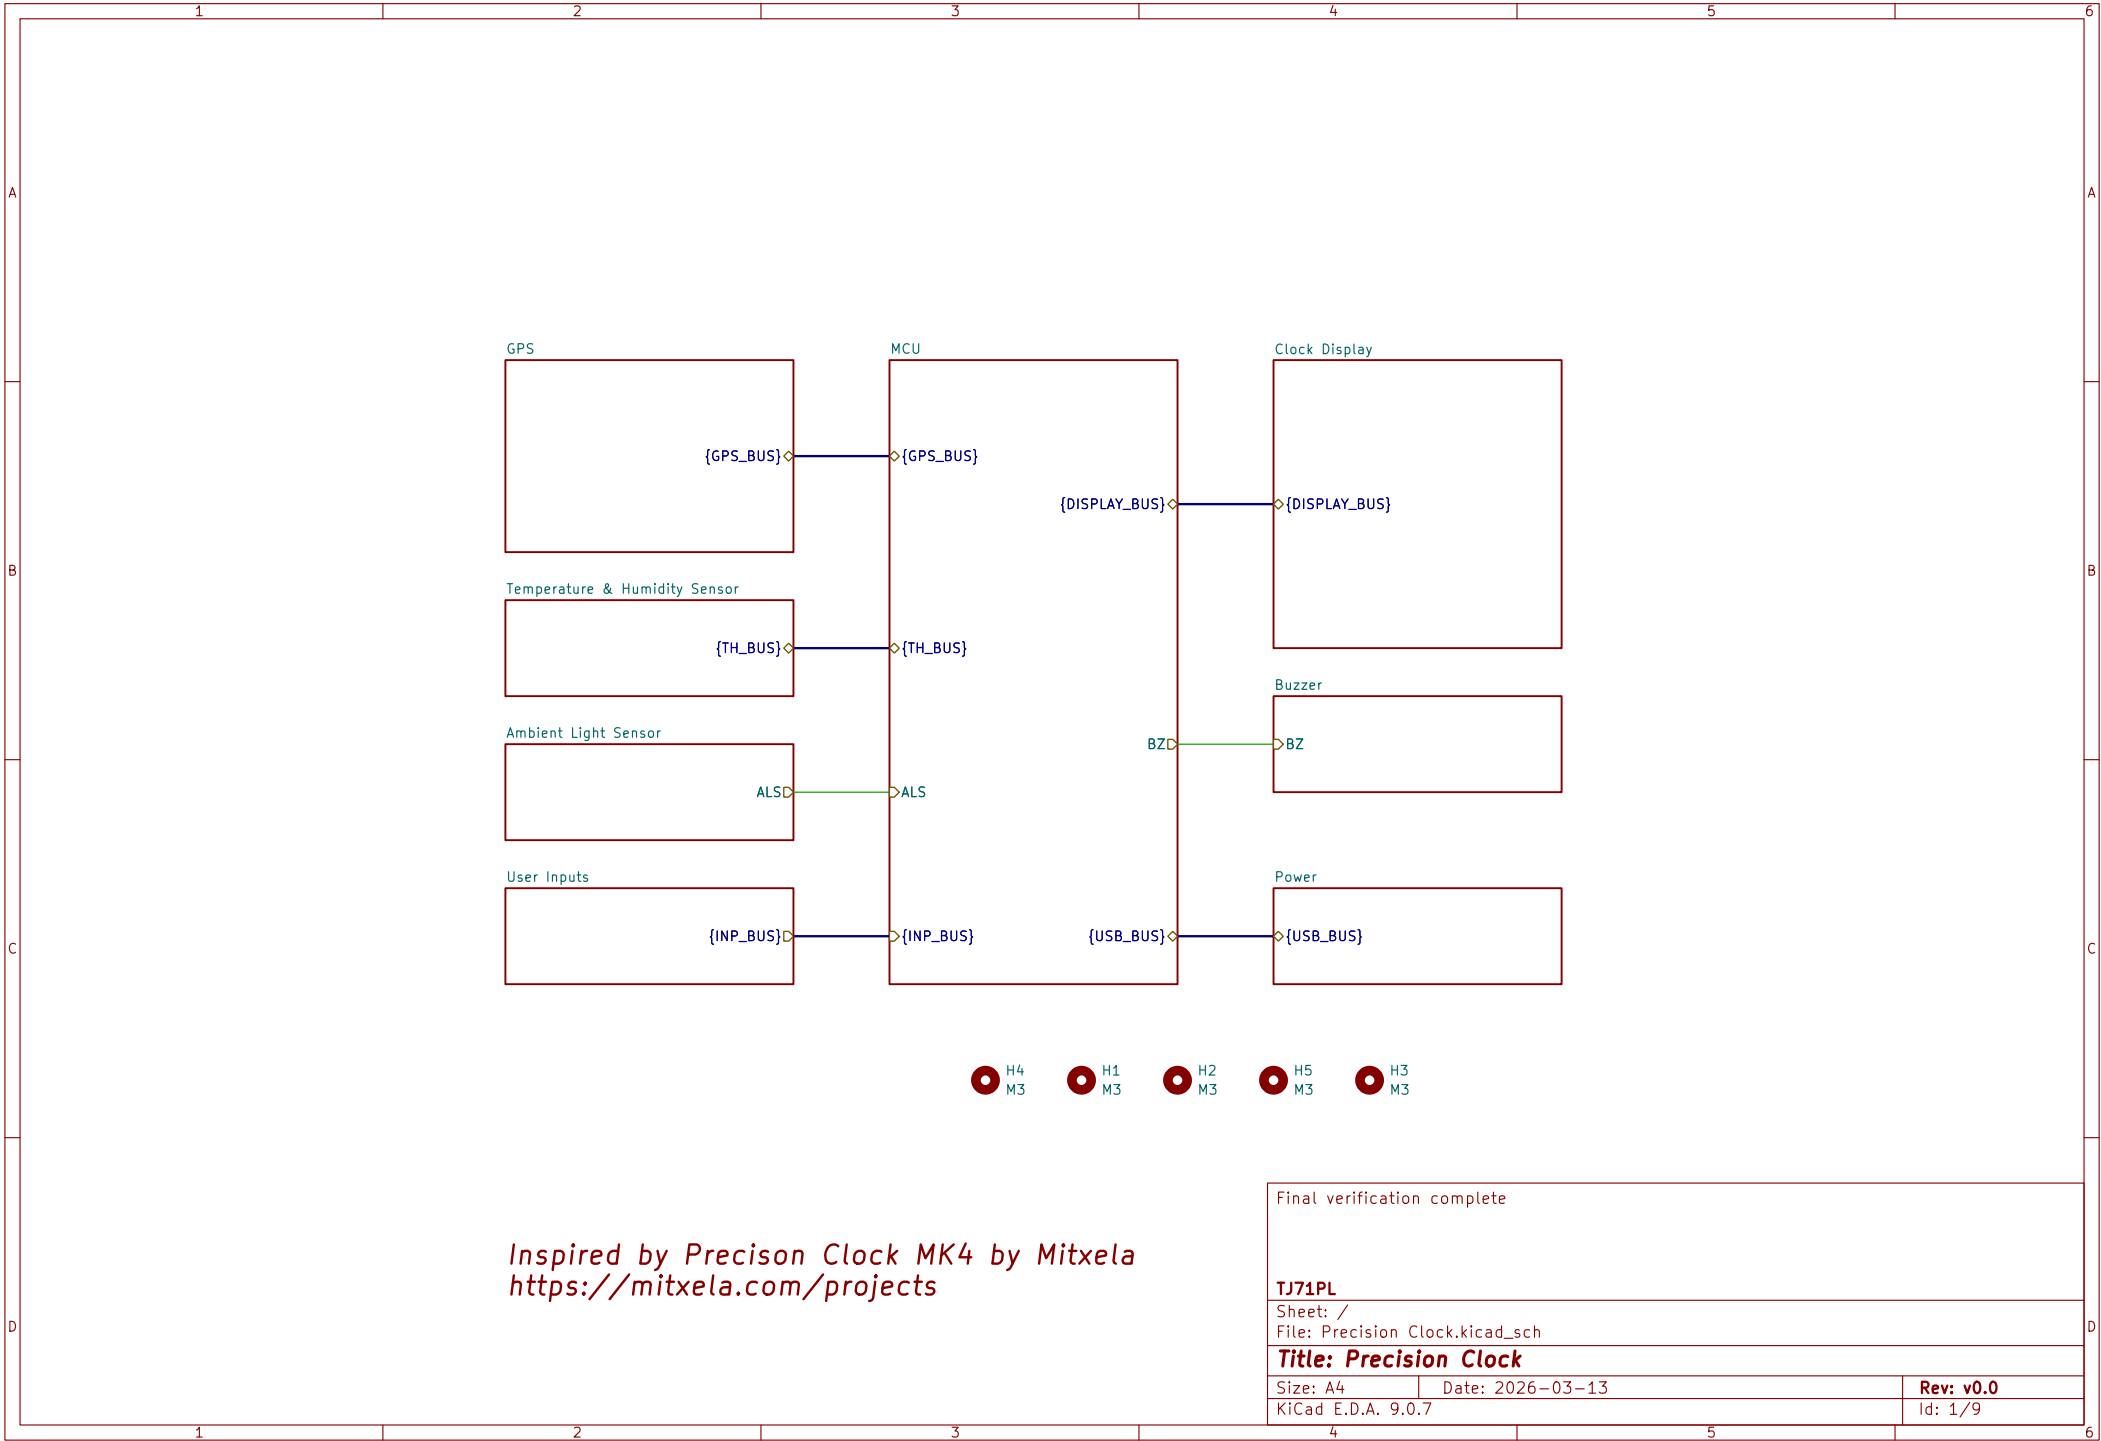

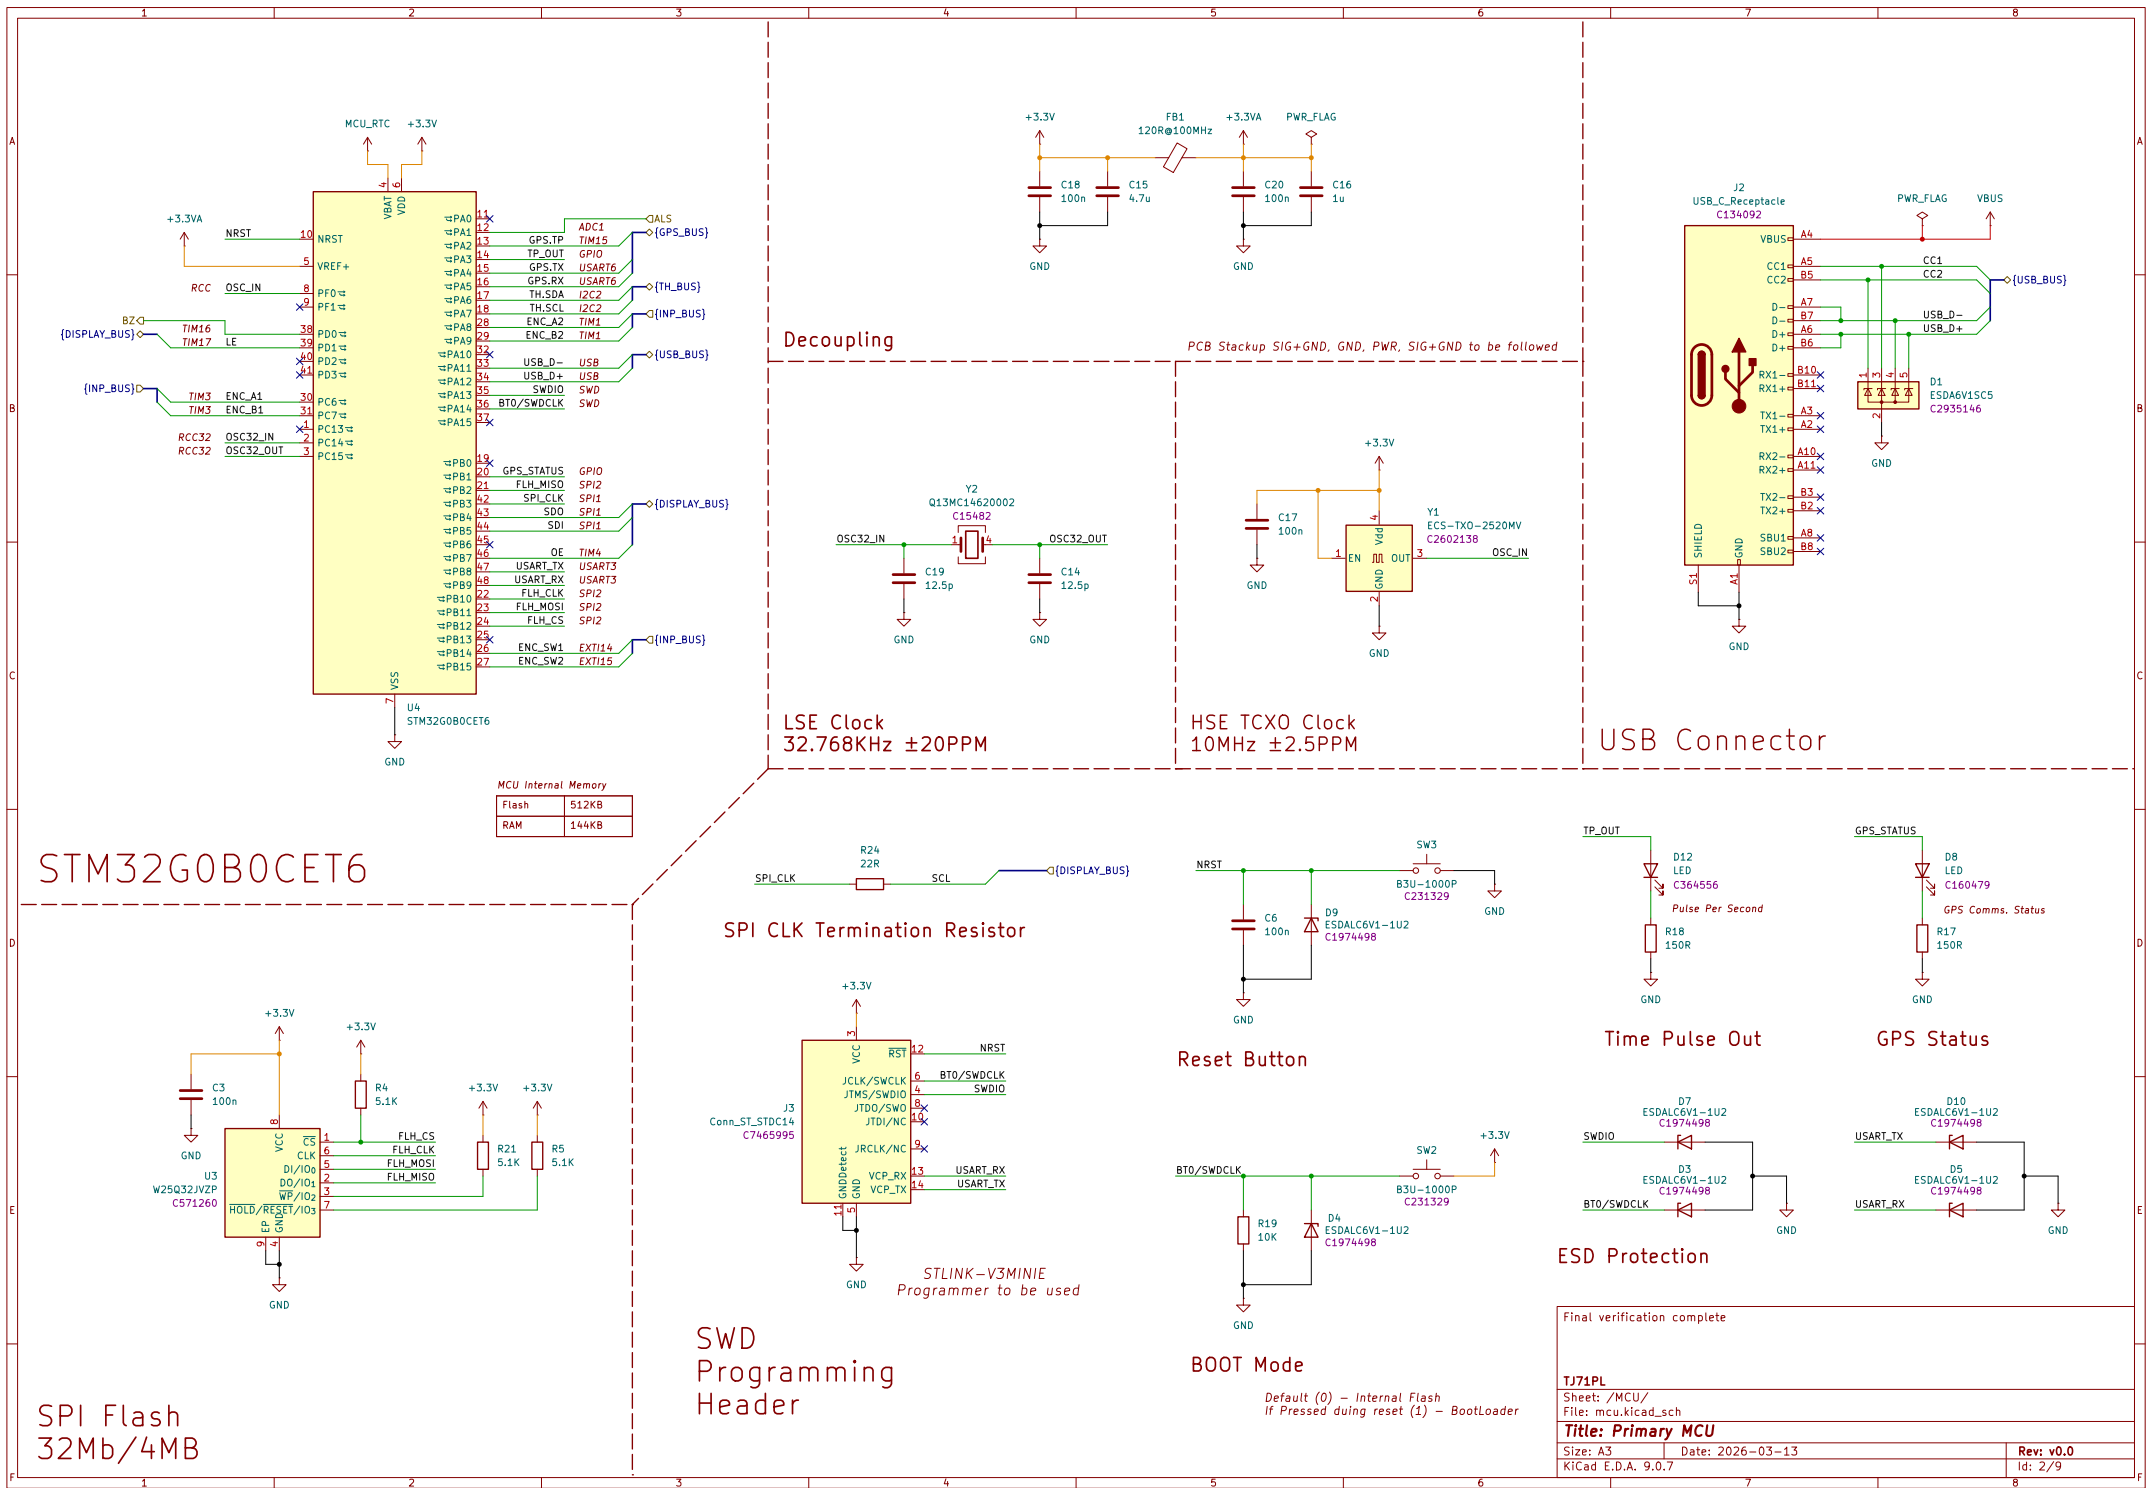


Backup Battery

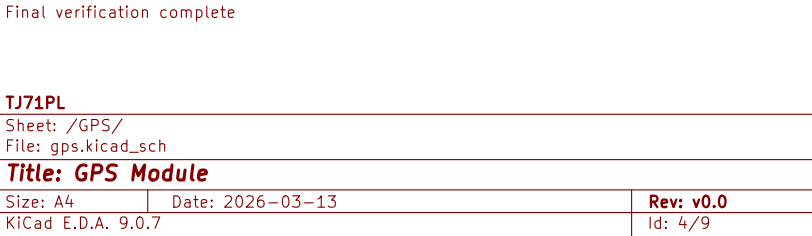


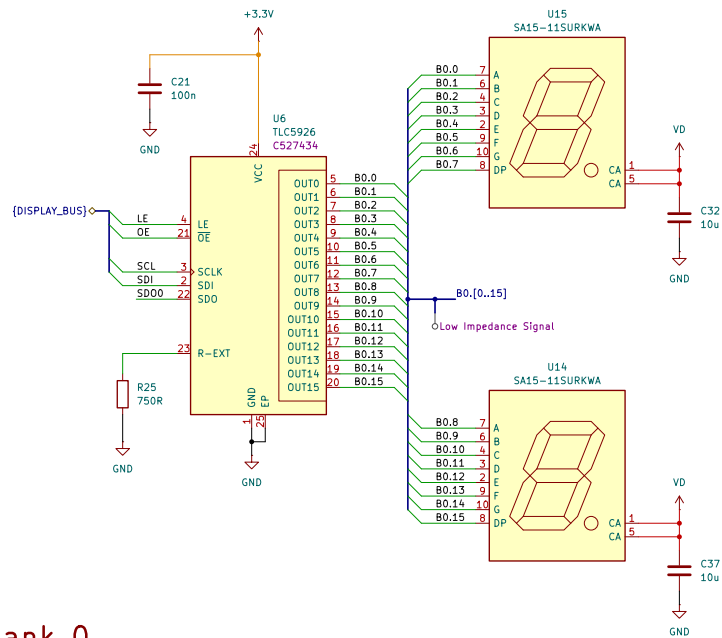

Display Bank 0

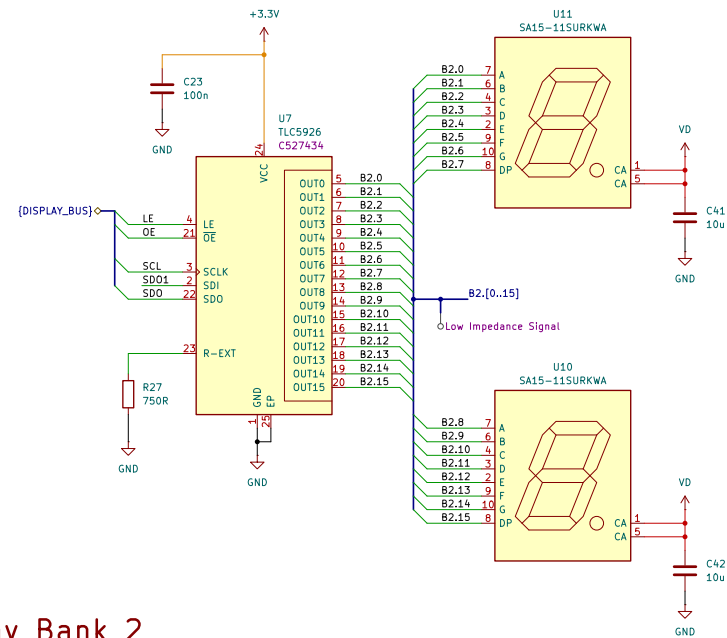

Display Bank 2

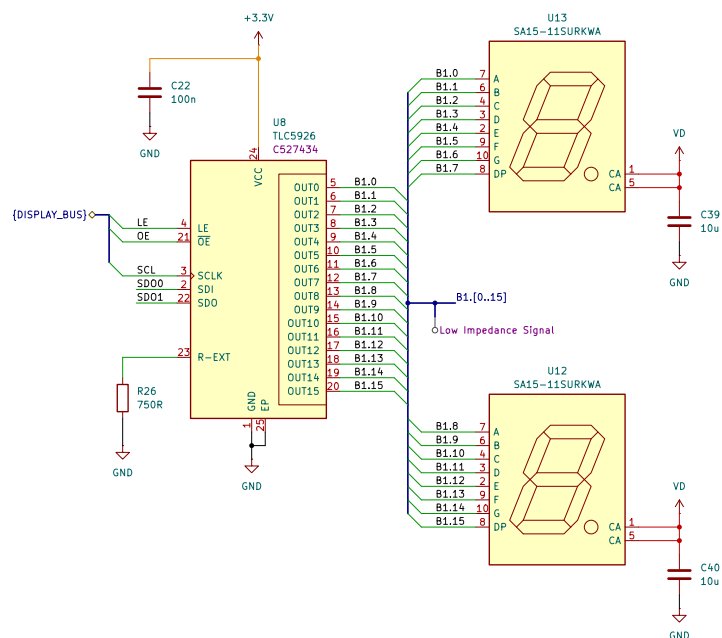

Display Bank 1

Parameter	
Current Through the LED	25mA
Total current consumption of the display	1200mA
Display Voltage	5V
Maximum Serial Clock Frequency	500KHz

Final verification complete


TJ71PL



Sheet: /Clock Display/
File: clock_display.kicad_sch

Title: Clock Display


Size: A3 Date: 2026-03-13
KiCad E.D.A. 9.0.7

Rev: v0.0
Id: 5/9

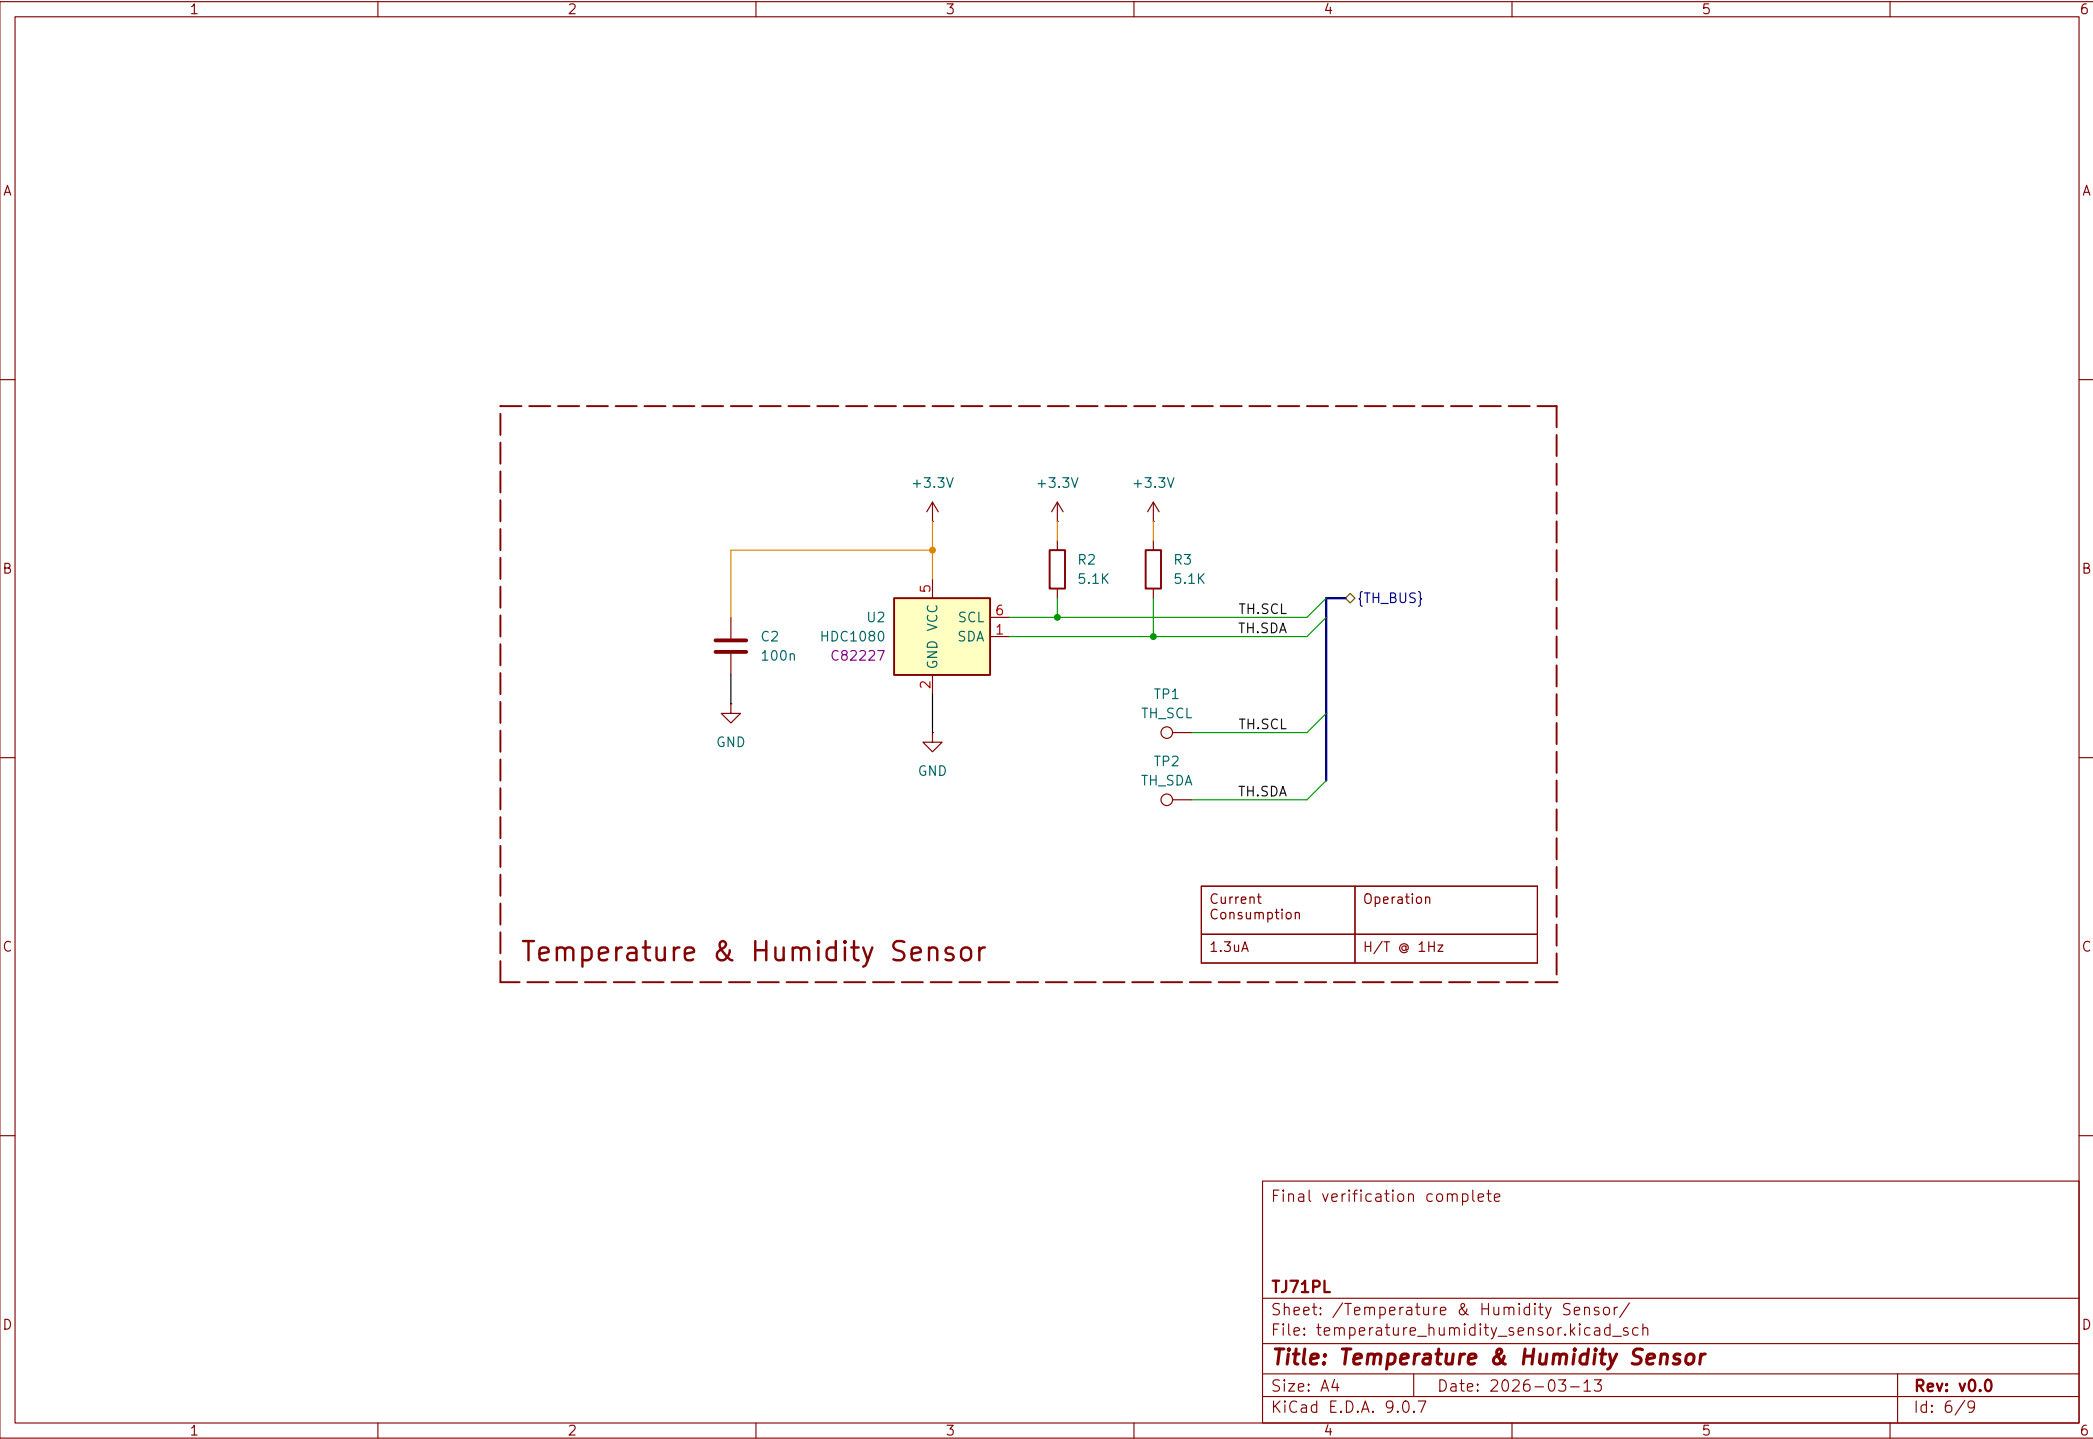

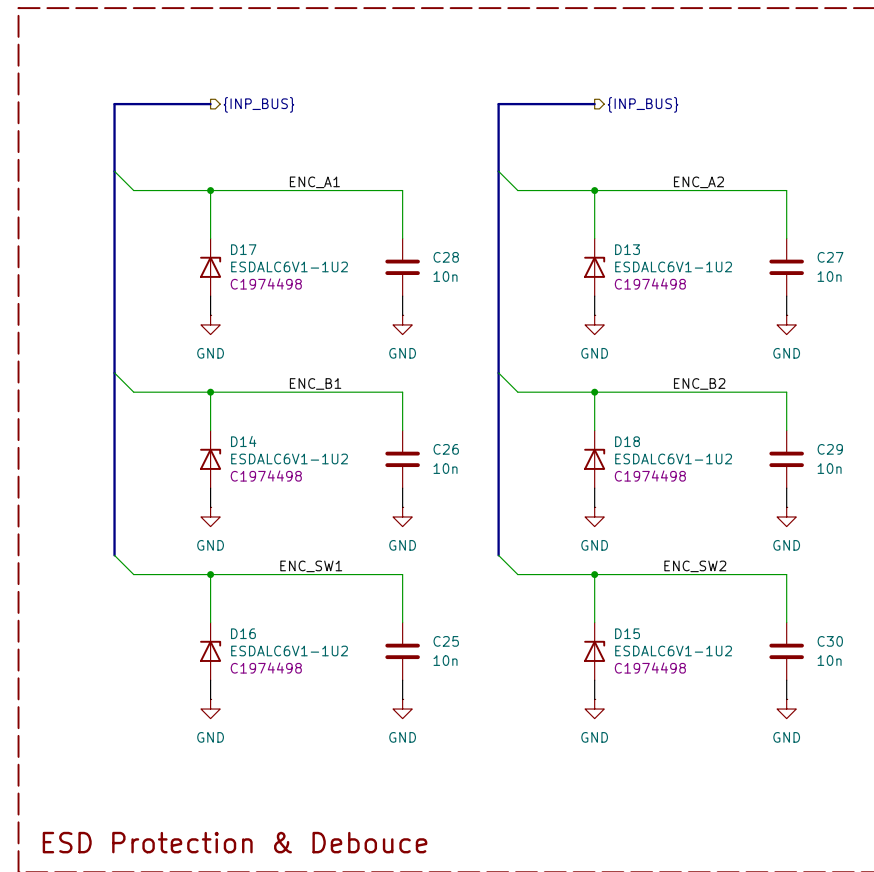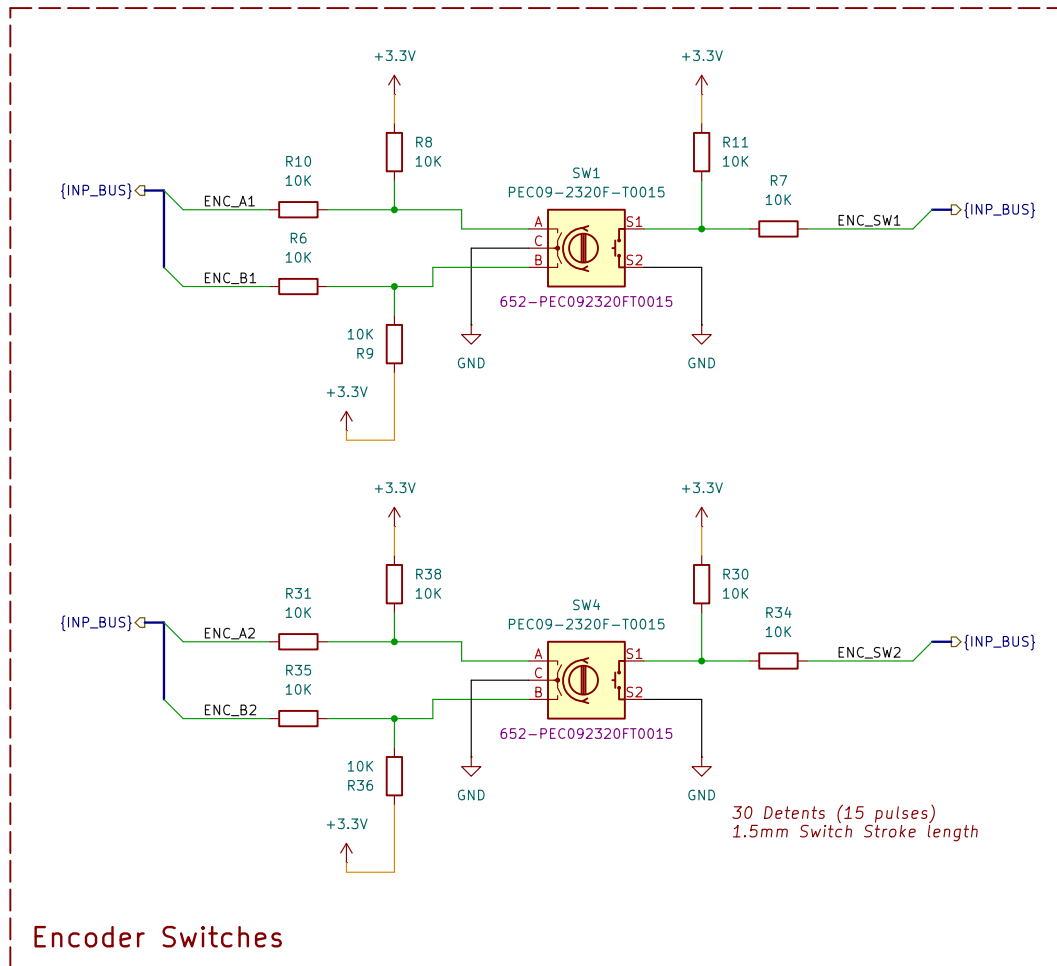

Final verification complete	
TJ71PL Sheet: /User Inputs/ File: user_inputs.kicad_sch	
Title: User Input	
Size: A4	Date: 2026-03-13
KiCad E.D.A. 9.0.7	Rev: v0.0 Id: 7/9

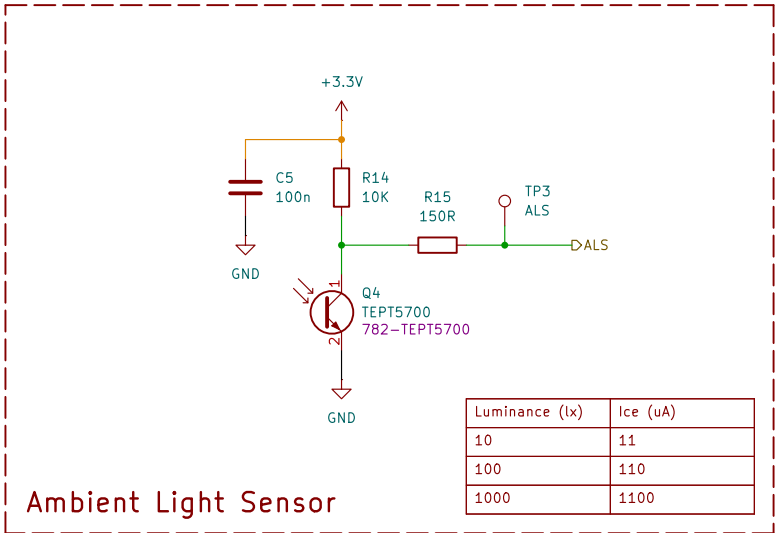

Luminance (lx)	Ice (uA)
10	11
100	110
1000	1100

Final verification complete

TJ71PL

Sheet: /Ambient Light Sensor/
File: ambient_light_sensor.kicad_sch

Title: Ambient Light Sensor

Size: A4	Date: 2026-03-13	Rev: v0.0
KiCad E.D.A. 9.0.7		Id: 8/9

