

SSP G7 - (v 7.0.3.67)  
Datum : 2017-03-22

## KONDENSATOR - ANGEBOT

WT-TYP : B8LASHx28/1P-SC-M (6.5+12.8+2x3/4")

Art. Nummer : 17188-028

**Connection Data**

F1 -	SOLDER 12.8 AISI 304 NON-CASTED(20)
F2 -	ISO-G 3/4" A NON-CASTED(20)
F3 -	SOLDER 6.5 AISI 304(20)
F4 -	ISO-G 3/4" A NON-CASTED(20)

**Connection Locations**

SEITE 1:	F1/F3 (Ein / Aus)
SEITE 2:	F4/F2 (Ein / Aus)

**Name des Mediums Seite 1 :** R290 (Propan)

**Name des Mediums Seite 2 :** Propylenglycol - Wasser (38 mass-%)

**Strömungsrichtung :** Gegenstrom

**Side 1 :** Inner Circuit, Narrow side  
**Side 2 :** Outer Circuit, Wide side

**SSP Alias :** B8LAS

### TECHN. VORGABEDATEN

		SEITE 1	SEITE 2
Leistung	kW	2,700	
Eintrittstemperatur	°C	85,00	50,00
Kondensationstemperatur	°C	54,74	
Unterkühlung	K	3,00	
Austrittstemperatur	°C	51,74	54,01
Durchfluss	kg/h   m³/h	26,87	0,6200
Kondensationsmassenstrom	kg/h	26,87	
Max. Druckverlust	kPa	50,0	50,0

### AUSLEGUNGSERGEBNISSE

		SEITE 1	SEITE 2
Wärmetauscherfläche	m²	0,657	
Wärmestromdichte	kW/m²	4,11	
MTD	K	3,66	
Wärmedurchgangskoeffizient (vorhanden/benötigt)	W/m², °C	1130/1120	
Druckverlust - total*	kPa	0,563	14,0
- in den Anschlüssen	kPa	-7,70e-3	0,355
Austrittsdruck	kPa	1890	
Kanäle-Anzahl		13	14
Gesamtplattenzahl		28	
Flächenreserve	%	0	
Verschmutzungsfaktor	m², °C/kW	0,004	
Anschlussdurchmesser	mm	16,0/16,0 (oben/unten)	16,0/16,0 (oben/unten)
Empfohlener Eintrittsdurchmesser	mm	From 3,01 to 6,74	
Empfohlener Austrittsdurchmesser	mm	From 3,29 to 6,58	
Reynoldszahl			229,4
Anschlußgeschwindigkeit – Eintritt	m/s	0,887	0,858

SSP G7 - (v 7.0.3.67)

**PHYSIKALISCHE KENNWERTE**


		<b>SEITE 1</b>	<b>SEITE 2</b>
Referenztemperatur	°C	54,74	52,00
Flüssigkeit Viskosität	cP	0,0668	1,50
Dichte	kg/m <sup>3</sup>	438,5	1018
Spez. Wärmekapazität	kJ/kg, °C	3,459	3,838
Wärmeleitfähigkeit	W/m, °C	0,07876	0,4307
Dampf Viskosität	cP	8,98e-3	
Dichte	kg/m <sup>3</sup>	41,86	
Spez. Wärmekapazität	kJ/kg, °C	2,604	
Wärmeleitfähigkeit	W/m, °C	0,02104	
- Latente Wärme	kJ/kg	273,9	
Wärmeübergangskoeff.	W/m <sup>2</sup> , °C	2290	6220
Minimum Wandtemperatur	°C	50,20	50,19
Maximum Wandtemperatur	°C	56,46	56,28
Größte Temperaturdifferenz an der Wand	K		0,18
Kanalgeschwindigkeit	m/s	0,171	0,153
Shear stress	Pa		26,9

**TOTALS**

		<b>SEITE 1</b>	<b>SEITE 2</b>
Gesamtgewicht	kg	2,49	
Füllvolumen, innerer Kreis	dm <sup>3</sup>	0,265	
Füllvolumen, äußerer Kreis	dm <sup>3</sup>	0,336	
Port size F1/P1	mm	16,0	
Port size F2/P2	mm	16,0	
Port size F3/P3	mm	16,0	
Port size F4/P4	mm	16,0	
NND F1/P1	mm	18,0	
NND F2/P2	mm	18,0	
NND F3/P3	mm	18,0	
NND F4/P4	mm	18,0	
CO2-Bilanz	kg	17,5	
Plattenmaterial		316 Stainless steel	
Hartlötmaterial		Copper	
Max. Betriebsdruck	bar	45/36	
Testdruck	bar	69	
Max. Betriebstemperatur	°C	135/225	
Connection Data	F1	SOLDER 12.8 AISI 304 NON-CASTED(20)	
	F2	ISO-G 3/4" A NON-CASTED(20)	
	F3	SOLDER 6.5 AISI 304(20)	
	F4	ISO-G 3/4" A NON-CASTED(20)	
Connection placement	in/out	F1/F3	F4/F2

SSP G7 - (v 7.0.3.67)

**MASSE**

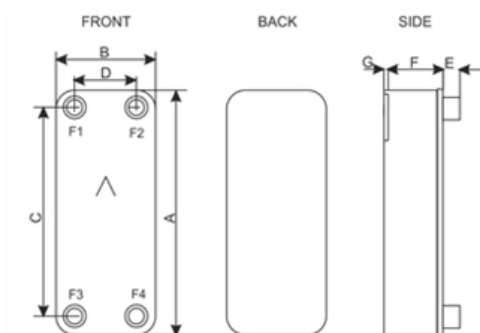

This is a schematic sketch. For correct drawings please use the order drawing function or contact your SWEP representative.

A	mm	318 +/-2
B	mm	76,2 +/-1
C	mm	278 +/-1
D	mm	40,0 +/-1
E	mm	20,1 +/-1
F	mm	41,0
G	mm	6,30 +/-1
R	mm	18,0

Disclaimer: Data used in this calculation is subject to change without notice. SWEP strives to use "best practice" for the calculations leading to the above results. Calculation is intended to show thermal and hydraulic performance, no consideration has been taken to mechanical strength of the product. Product restrictions - such as pressure, temperatures and corrosion resistance- can be found in SWEP product sheets and other technical documentation. SWEP may have patents, trademarks, copy rights or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from SWEP, the furnishing of this document does not give you any license to these patents, trademarks, copy rights, or other intellectual property. To the maximum extent permitted by applicable law, the software, the calculations and the results are provided without warranties of any kind, whether express or implied. No advice or information obtained through use of the software (including information provided in the results), will create any warranty not expressly stated in the applicable license terms. Without limiting the foregoing, SWEP does not warrant that the content (including the calculations and the results) is accurate, reliable or correct. SWEP does not warrant that any system comprising heat exchanger and other components, installed on the basis of calculations in this software, will meet your requirements or function to your satisfaction or expectations.

\*Ohne Druckverlust in den Anschlüssen.