
AR-Mini · T1 · Mission state machine

firmware/armini/lib/core/StateMachine.cpp · every number is a Config default (VERIFY) · grey mono = the dry-run serial command that makes it happen · v1 · 10.10.2026

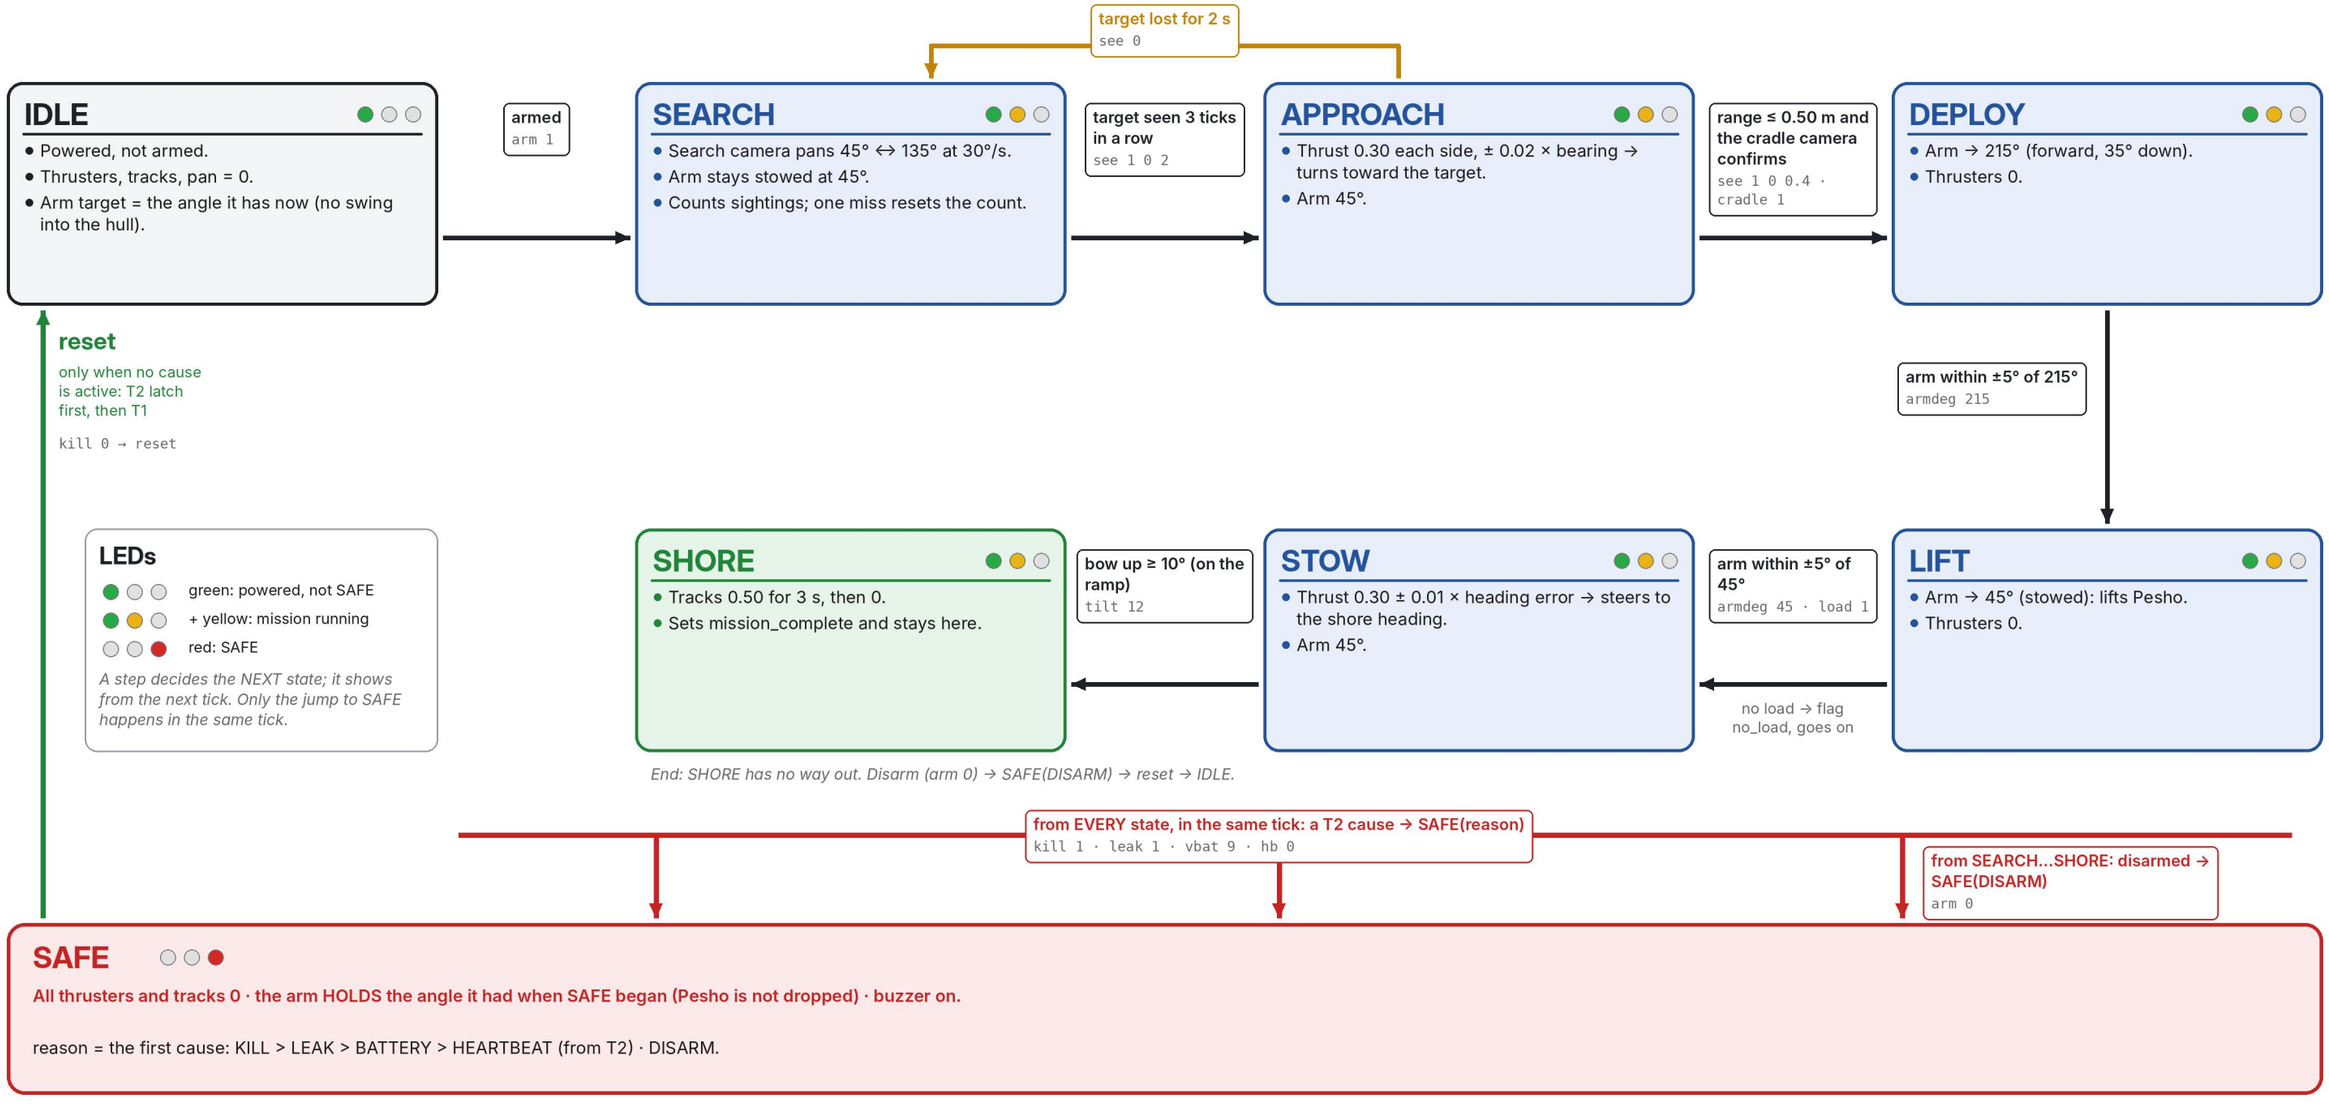

Source: StateMachine.cpp tick() + step(). Host tests: firmware/armini/test (pio test -e native). On the DevKit today: dry-run HAL, every input typed over serial (`?` lists them).*