
K-UI G1 carrier: actual-size fit sheet

DRAFT - outline registration, support and installed fit are unqualified.

Print this PDF on matching paper: Actual size / 100%; turn off Fit and Shrink.

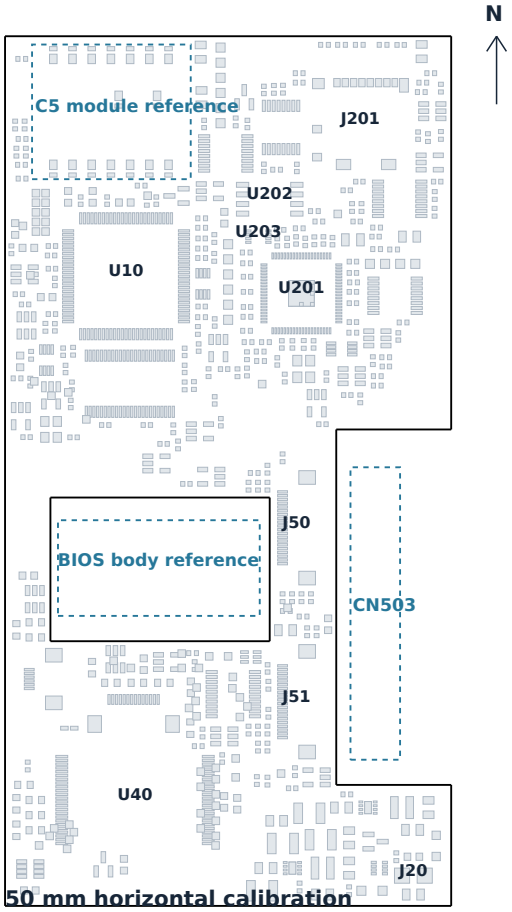

Fit check, before cutting paper

1. Measure BOTH 50 mm bars.
2. Match the BIOS and CN503 outlines.
3. Check the complete perimeter and every existing part underneath it.
4. Keep both thermal-contact chips clear.
5. Check shield, SD access and case posts.

Paper geometry is exact; registration is draft.
Black: native carrier edge and openings.
Gray: actual carrier component pads.
Blue dashed: provisional existing hardware.

Carrier: 59 x 115 mm; PCB 0.8 mm.
Nominal underside: motherboard +2.5 mm.
Nominal top: motherboard +3.3 mm.
Tall existing capacitors need clear openings.
Paper fit does not establish stack height.

C5 contacts need a supported 0.90 mm gap and at least 6.24 N total clamp reaction.
Retention and support are not yet designed.

If either bar is wrong, the printer scaled the page. Do not resize board geometry.

No shield cutting is assumed. This sheet is not a fabrication release.

PCB SHA-256: 7d7c3d2693fd01a43f67d1618dabdd9e908bb48c382820c1bf2be7a41367bfc9